

No.1
CLAMP



MADE IN MALAYSIA

CATALOGUE 09/2017



JSCLAMP

HIGH QUALITY TOGGLE CLAMP



**Vertical Toggle
Clamp**



**Latch Toggle
Clamp**



**Heavy Duty
Weldable Clamp**



**Air Power Toggle
Clamp**



We are Exporter :

The exporter of high quality Toggle Clamp, Latch, Machine Mount, Revolving Plate, Parts Cabinet, Anti-Vibration Mount and other industrial products.



To meet the domestic customers' requirement, the excellent products quality is being recognized and has created a demand in the foreign markets. HUP NGAI INDUSTRY SDN BHD (formerly known as Syarikat Juruteraan Hup Ngai) was established in 1973), manufacturer of ISO 9001: 2008 certified. It is a professional company to manufacture excellent quality toggle clamp, toggle link clamp, machine mount, anti-vibration mount, parts cabinet and etc which a trade mark of "JS CLAMP".



INDEX

• PAGE •



JSCLAMP

HIGH QUALITY TOGGLE CLAMP

TOGGLE CLAMP


*Also available in Stainless Steel



HORIZONTAL

• HANDLE •


Model	Page
H215	1-1
H225*	1-1
H230, H230L	1-1
H230F, H230FL	1-2
H235*, H235B*	1-2
H238*	1-2
H245*, H245B*	1-3
H301*	1-3
H313	1-3
H300, H300L	1-4
H300H, H300HL	1-4
H330, H330L	1-4
H380, H380B	1-5
H381, H381B	1-5
H381H	1-5
H430, H430B	1-6
H440, H440B	1-6
H450, H450B	1-6
H460, H460B	1-7
H500L	1-8
H530L	1-8
H228F	1-9
H384, H384B	1-9
H209, H209B	1-9
H208, H208B	1-10
H520L	1-10
H550L	1-10



VERTICAL

• HANDLE •

Model	Page
V101	2-1
V105	2-1
V108*	2-1
V108F*	2-2
V110-L, V110-L1	2-2
V120R*, V120RB*	2-2
V125	2-3
V125R	2-3
V130, V130L	2-3
V141*, V141B*	2-4
V150	2-4
V160	2-4
V170	2-5
V210, V210B	2-5
V310	2-5
V247U, V247UB	2-6
V247S, V247SB	2-6
V130B, V130BL	2-7
V130S, V130LS	2-7
V130SB, V130LSB	2-7
V120, V120B	2-8
V142, V142B	2-8
V208, V208B	2-8
V145S	2-9
V145SB	2-9



VERTICAL

• HANDLE •

Model	Page
V145SB4	2-10
V145SBN	2-10
V209, V209B	2-11
V210S, V210SB	2-11



PUSH & PULL

• TYPE •

Model	Page
P102	3-1
P115	3-1
P125	3-1
P130*	3-2
P150	3-2
P152	3-2
P107	3-3
P154	3-3
P156	3-3
P202	3-4
P204*	3-4
P206	3-4
P208	3-5
P340	3-5
P105	3-5
P100	3-6
P109	3-6
P200	3-6
P209	3-7
P300	3-7
P309	3-7
P102S	3-8
P122	3-9
P320	3-9
P330	3-9
P560	3-10
P570	3-10
P580	3-10
P610	3-11
P620	3-11
P625	3-11
P106	3-12
P118	3-12
P170	3-12
P110LH, P110RH	3-13
P120	3-13
P600	3-13
P710	3-14
P720	3-14
P630	3-14
P116	3-15



LATCH


• TYPE •

Model	Page
L130*	4-1
L1305*	4-1
L131*	4-1
L1315*	4-2
L132*	4-2
L133	4-2
L134	4-3
L352*	4-3
L354*	4-3
L138*	4-4
L148*	4-4
L158*	4-5
L350*	4-6
L356*	4-6
L135	4-7
L360*	4-7
L365*	4-7
L137	4-8



HEAVY DUTY WELDABLE

Model	Page
AR801	5-1
AR802	5-1
AR803	5-1
AR801SB	5-1
AR802SB	5-1



AIR POWER

• TOGGLE CLAMP •

Model	Page
V120RA	6-1
V130A	6-1
V210A	6-2
V247UA	6-2
P330A	6-3
H228FA	6-4



POWER SCREEN TENSIONER / ACCESSORIES

Model	Page
PST4050	7-1
Rubber Cushion Spindle	7-1
Flanged Washer	7-1
Swivel Foot Spindle	7-2

Note : Engineering changes, dimensions and specifications referred in this catalogue are subject to change without prior notice

© 2017 by JS CLAMP SDN BHD. All Right for creation, photos and text area reserved for editor JS CLAMP Photo-machanical or any other reproduction on expresses permission only.

*Also available in Stainless Steel

JS PRODUCTS

 SQUEEZE ACTION • TOGGLE CLAMP •	
Model	Page
SC2050	8-1
SC3075	8-1

 LIFTING • CLAMP •	
Model	Page
Horizontal Lifting Clamp	9-1
Vertical Lifting Clamp	9-1

 MOULD • CLAMP •	
Model	Page
Refer to page MCH, MCS	9-2

 TOGGLE LINK • CLAMP •	
Model	Page
TL01*	10-1
TL02*, TL02K*	10-1
TL03*, TL03K*	10-1
TL04*, TL04K*	10-2
TL05*	10-2
TL06K	10-2
TL116*	10-3
TL124*, TL124K*	10-3
TL118*	10-3
TL119	10-4
TL121	10-4
TL135*	10-4
TL104*, TL104K*	10-5
TL122*	10-5
TL107	10-5
TL127K	10-6
TL129*	10-6
TL305	10-6
TL105*, TL105K*	10-7
TL112*	10-7
TL123*	10-7
TL307*	10-8
TL204*	10-8
TL304*, TL304K*	10-8
TL126*	10-9

 UNIVERSAL RACK CLAMP & C - CLAMP	
Model	Page
URC 6020, URC 6030	11-1
C100, C150, C200	11-2

 HEAVY DUTY • CABINET •	
Model	Page
Refer to page A3, F4, F6, G4, G6	12-1
F4, F6, G4, G6 (with door)	12-2

 REVOLVING PLATE	
Model	Page
RP160MDSH	13-1
RP16023	13-1
RP160MD	13-1
RP25023F	13-2
Kung Fu Exercise Twister	13-2

 RACK FOOTING	
Model	Page
Refer to page RF	14-1

 MACHINE MOUNT / LEVEL ADJUSTER	
Model	Page
Refer to page MM, LA, LAR	15-1

 LEVELING MOUNT & LEVELING FEET	
Model	Page
Refer to page LM, LML	16-1
RUBBER PAD	16-1
LF	16-2

 MITRE UNIVERSAL • CLAMP •	
Model	Page
MUC2910	17-1
MUC1910	17-1
MUC2920	17-1
MUC2915	17-1

Note : Engineering changes, dimensions and specifications referred in this catalogue are subject to change without prior notice

INDEX

• PAGE •



JS CLAMP
HIGH QUALITY TOGGLE CLAMP

JS PRODUCTS

*Also available in Stainless Steel



BB DIE SET

Model

Refer to page

Page

18-1



KUNGFU STAINLESS STEEL RING

Model

Kung Fu Stainless Steel Ring

Page

24-1



ANTI-VIBRATION MOUNT

Model

Refer to page

HHS,HHC,TTS,TTT,THS,THC

Page

19-1

19-1



TROLLEY

Model

CT - BT4015

CT - BT4030

UT3 - 1

Page

25-1

25-1

25-2



STANDARD ROUND PUNCH

Model

SKD

SKH

Page

20-1

20-1



STAMPING SAFETY TOOL / DEAD BLOW HAMMER

Model

SST-15RT

SST-30RT

SST-1~SST-4

JSH-3

Page

21-1

21-1

21-1

21-1



MACHINE MOVER

Model

MV25T

Page

22-1



UNIPUNCH

Model

A-1-150~A-5-150

Page

22-1



PNEUMATIC INDEX ROTARY TABLE

Model

Pneumatic Index Rotary Table

Page

23-1



HAND KNOB

Model

HKM - 40M620

HKM - 40M630

HKM - 40M640

HKM - 40M650

HKM - 40M820

HKM - 40M830

HKM - 40M840

HKM - 40M850

HKM - 63M1020

HKM - 63M1030

HKM - 63M1040

HKM - 63M1050

HKM - 63M1060

HKM - 63M1220

HKM - 63M1230

HKM - 63M1240

HKM - 63M1250

HKM - 63M1260

HKF - 40M6SS

HKF - 40M8SS

HKF - 63M10SS

HKF - 63M12SS

Page

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

26-1

Note : Engineering changes, dimensions and specifications referred in this catalogue are subject to change without prior notice

© 2017 by JS CLAMP SDN BHD. All Right for creation, photos and text area reserved for editor JS CLAMP Photo-machanical or any other reproduction on expresses permission only.




**HORIZONTAL
HANDLE
• TOGGLE CLAMP •**

Model : H215



Holding Capacity : 27kg MAX
Weight : 30g

Handle Moves ... 80°
Arm Moves ... 90°

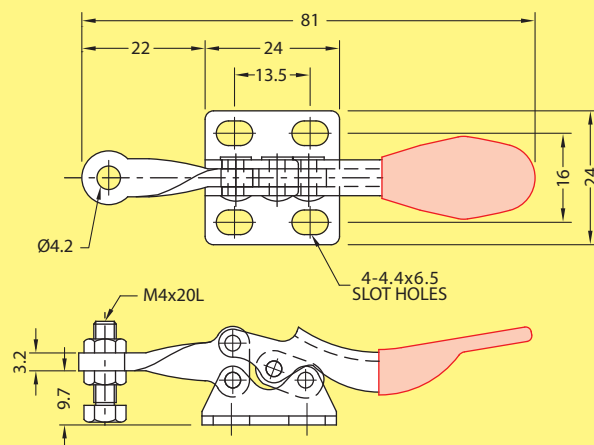

unit : mm

Model : H225

*Also available in Stainless Steel


Model : H225SS

(Stainless steel model is supplied with stainless steel hex. bolt M4 x 20L)





Holding Capacity : 27kg MAX
Weight : 33g

Handle Moves ... 80°
Arm Moves ... 90°

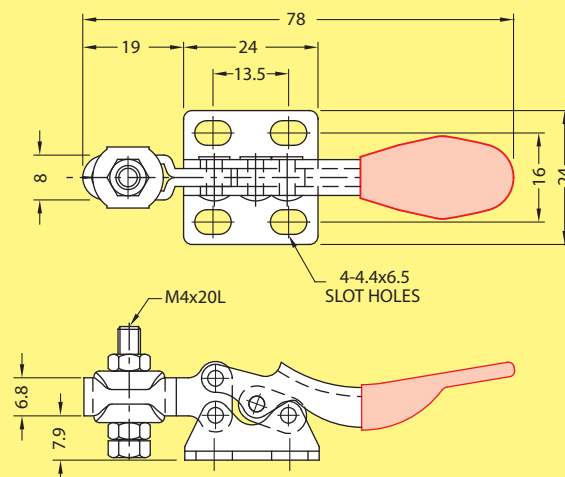


unit : mm

Model : H230, H230L

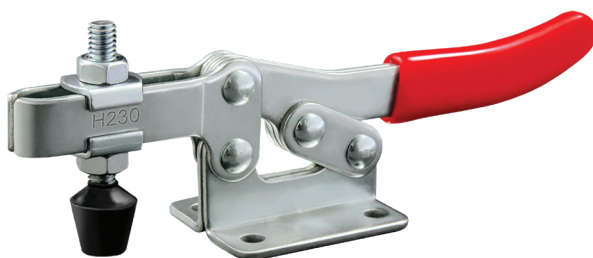

Holding Capacity : 227kg MAX
Weight : 364g, 385g

Handle Moves ... 58°
Arm Moves ... 80°

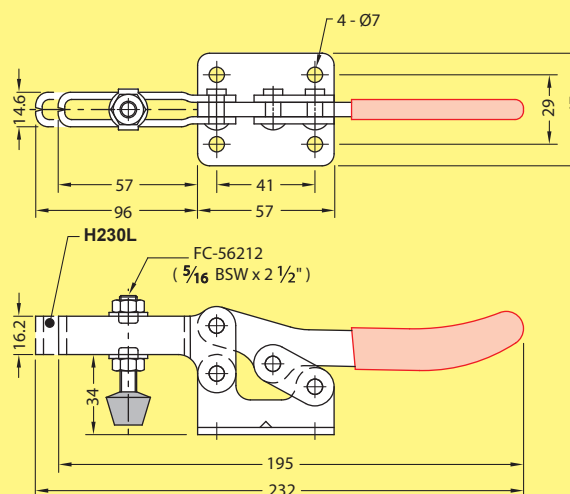

unit : mm


HORIZONTAL HANDLE

• TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : H230F, H230FL

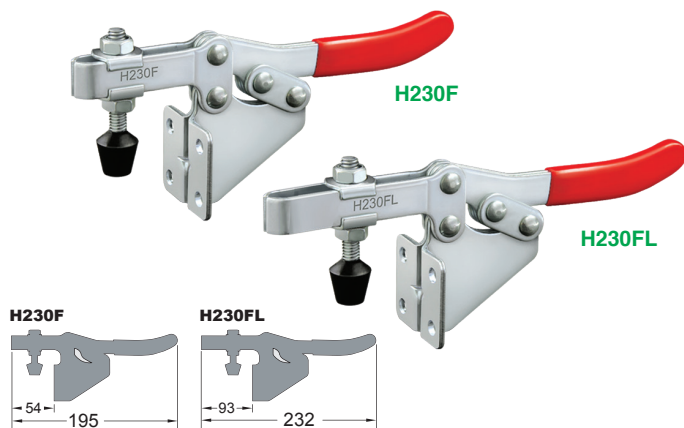

Holding Capacity : 227kg MAX
Weight : 428g, 425g

Handle Moves ... 58°
Arm Moves ... 85°

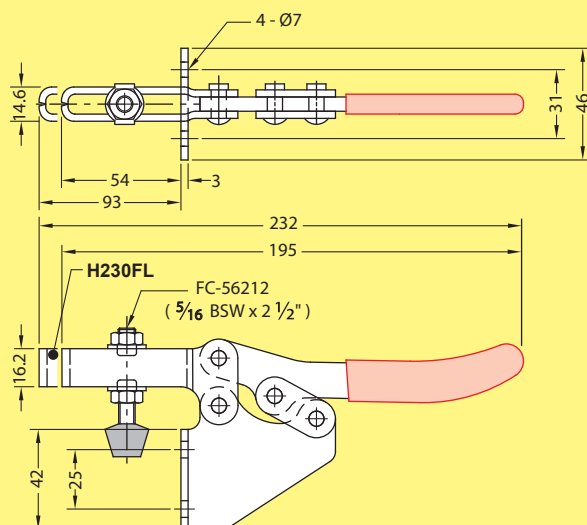

unit : mm

Model : H235, H235B

*Also available in Stainless Steel


Model : H235SS, H235BSS

(Stainless steel models are supplied with stainless steel hex. bolt 1/4 BSW x 1 3/4")



Holding Capacity : 90kg MAX
Weight : 130g, 130g

Handle Moves ... 60°
Arm Moves ... 85°

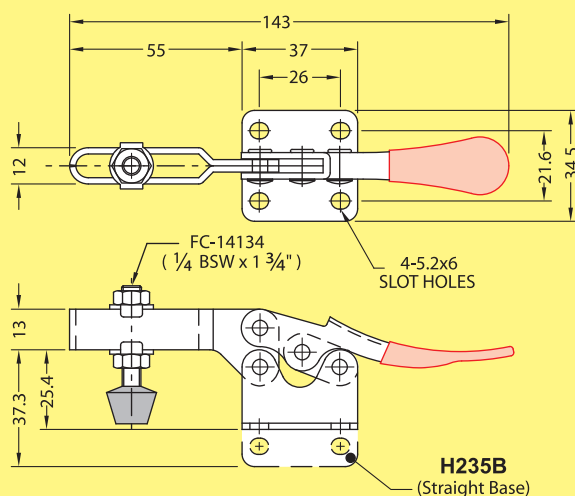

unit : mm

Model : H238

*Also available in Stainless Steel


Model : H238SS

(Stainless steel models are supplied with stainless steel hex. bolt 1/4 BSW x 1 3/4")



Holding Capacity : 100kg MAX
Weight : 148g

Handle Moves ... 87°
Arm Moves ... 79°

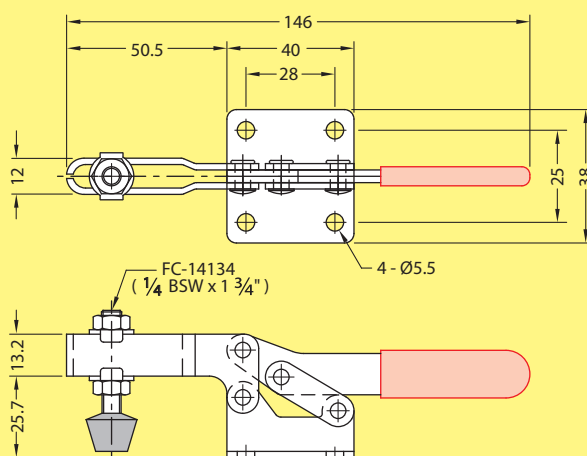

unit : mm



HORIZONTAL HANDLE • TOGGLE CLAMP •

Model : H245, H245B

*Also available in Stainless Steel


Model : H245SS, H245BSS

(Stainless steel models are supplied with stainless steel hex. bolt $\frac{5}{16}$ BSW x 2")



Holding Capacity : 227kg MAX
Weight : 278g, 278g

Handle Moves ... 65°
Arm Moves ... 90°

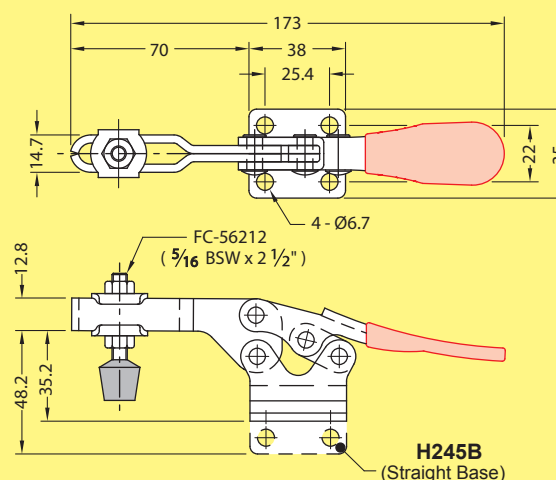


unit : mm

Model : H301

*Also available in Stainless Steel


Model : H301SS

(Stainless steel model is supplied with stainless steel hex. bolt M4 x 40L)

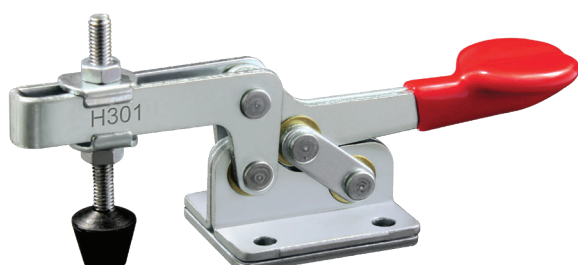

Holding Capacity : 30kg MAX
Weight : 106g

Handle Moves ... 55°
Arm Moves ... 65°

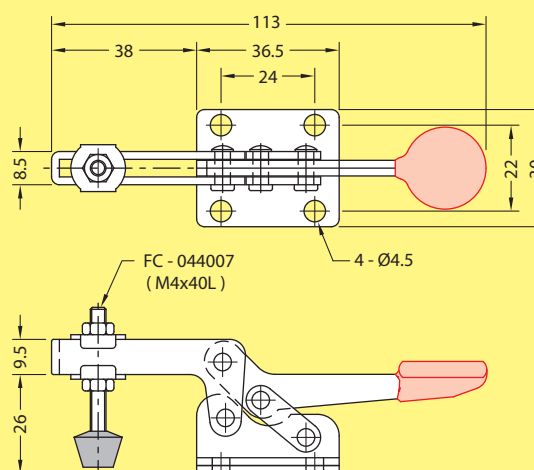


unit : mm

Model : H313



Holding Capacity : 68kg MAX
Weight : 112g

Handle Moves ... 90°
Arm Moves ... 90°

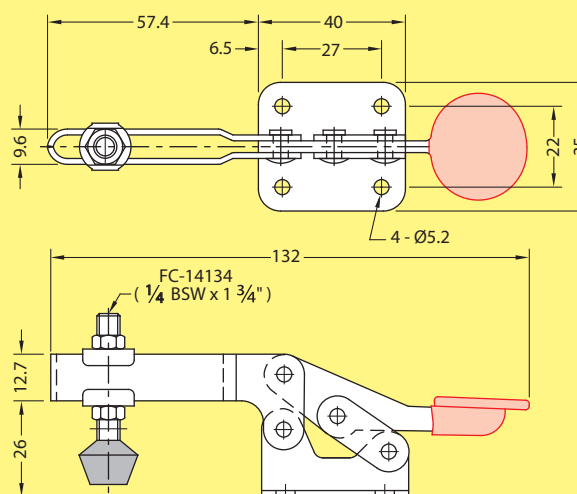


unit : mm




HORIZONTAL HANDLE • TOGGLE CLAMP •

Model : H380, H380B

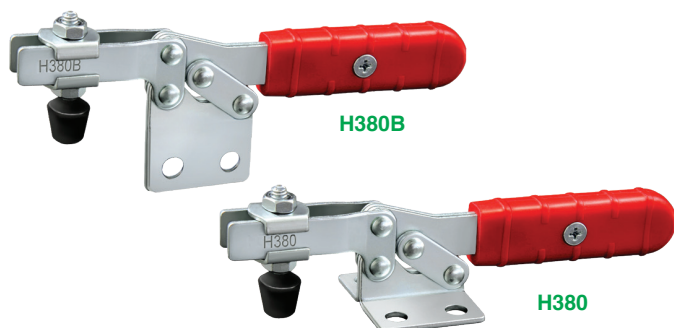


Holding Capacity : 250kg MAX
Weight : 228g, 230g

Handle Moves ... 84°
Arm Moves ... 82°

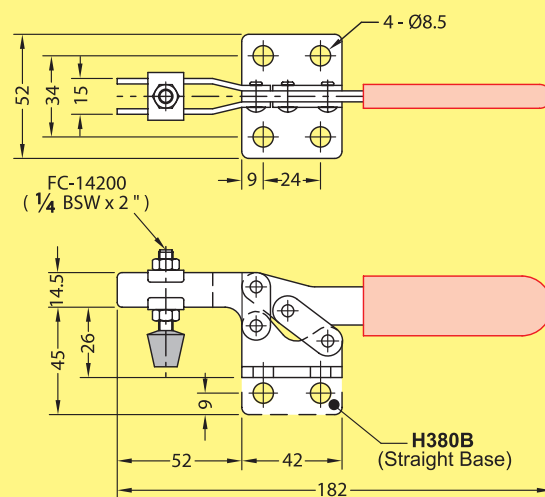


unit : mm

Model : H381, H381B

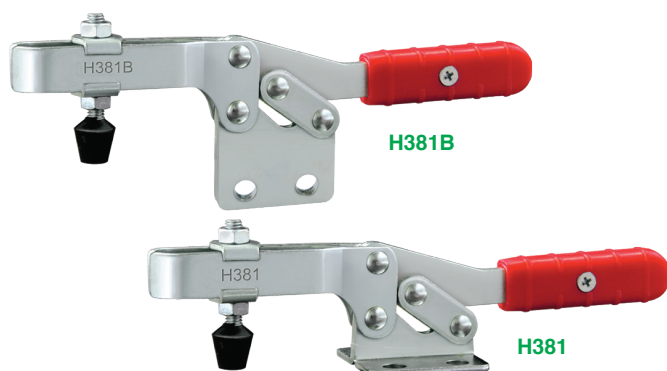

Holding Capacity : 280kg MAX
Weight : 498g, 505g

Handle Moves ... 87°
Arm Moves ... 82°

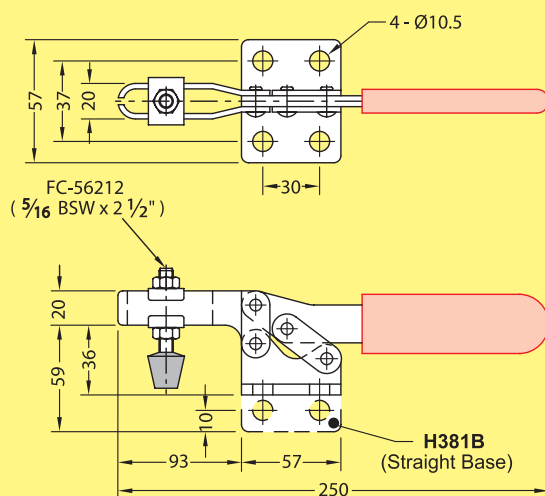


unit : mm

Model : H381H



Holding Capacity : 280kg MAX
Weight : 638g

Handle Moves ... 87°
Arm Moves ... 82°

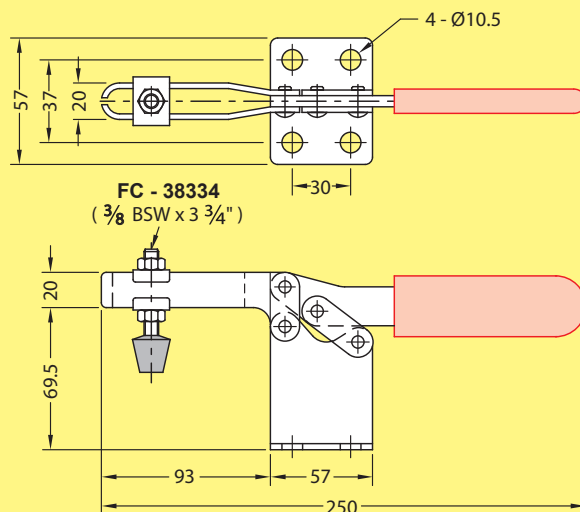

unit : mm



HIGH QUALITY TOGGLE CLAMP

FC-14200
($\frac{1}{4}$ BSW x 2")

H440B
(Straight Base)

Technical drawings of two mechanical components, likely tools or fixtures, showing dimensions and part labels.

Top Drawing (Side View):

- Overall length: 186
- Distance from handle to first hole: 68
- Distance between holes: 40
- Distance from last hole to handle: 26
- Distance from handle to first hole (alternative measurement): 14.8
- Distance from handle to last hole: 6.6
- Distance from handle to last hole (alternative measurement): 2.5
- Distance from handle to last hole (alternative measurement): 31

Bottom Drawing (Side View):



- Overall length: 48
- Distance from handle to first hole: 14
- Distance from handle to last hole: 39
- Distance from handle to last hole (alternative measurement): 34
- Part label: FC-56212 ($\frac{5}{16}$ BSW x $2 \frac{1}{2}$ ")
- Part label: H450B (Straight Base)

10/3/16 5:46 PM



**HORIZONTAL
HANDLE
• TOGGLE CLAMP •**

Model : H460, H460B

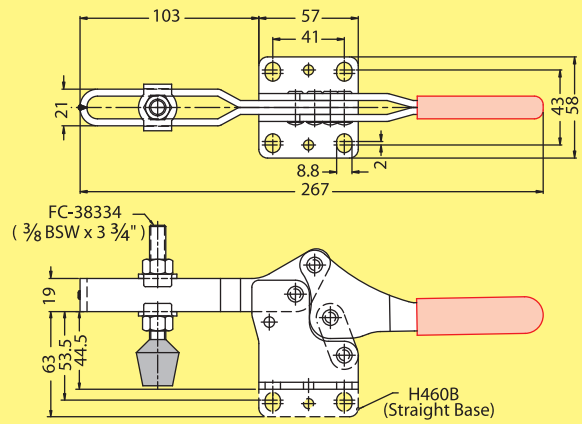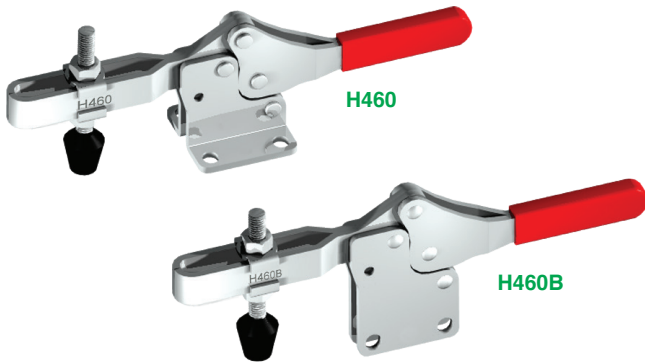

unit : mm


Holding Capacity : 340kg MAX
Weight : 737g

Handle Moves ... 55°
Arm Moves ... 95°


Type of Toggle Clamp




Horizontal Handle




Vertical Handle



Push / Pull



Latch





HORIZONTAL HANDLE

• TOGGLE CLAMP •



JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : H500L

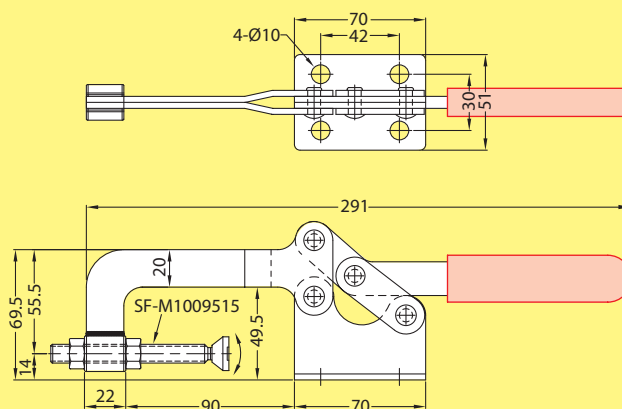
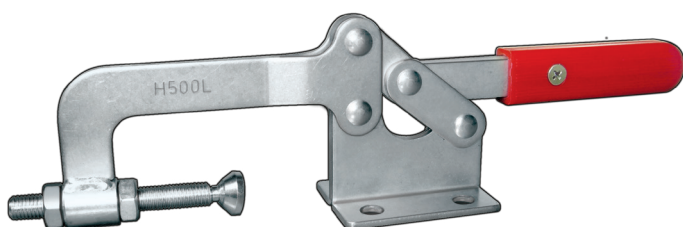


unit : mm

Holding Capacity : 300kg MAX
Weight : 706g

Handle Moves ... 83°
Arm Moves ... 81°

Model : H530L

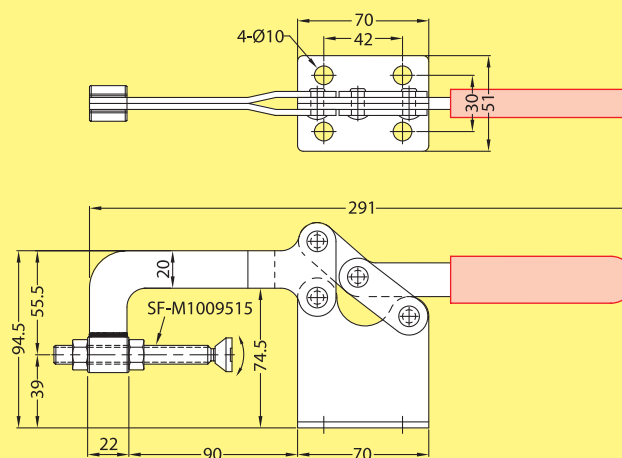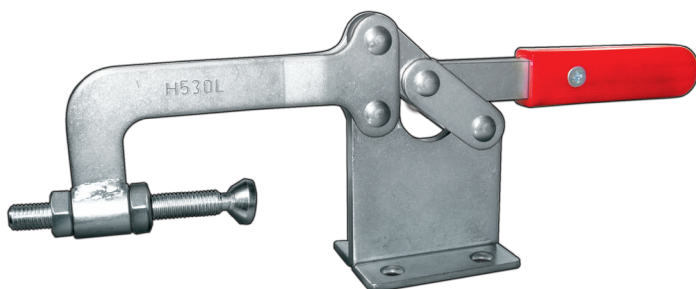

unit : mm

Holding Capacity : 300kg MAX
Weight : 790g

Handle Moves ... 83°
Arm Moves ... 81°




**HORIZONTAL
HANDLE
• TOGGLE CLAMP •**

Model : H228F




Holding Capacity : 100kg MAX
Weight : 431g

Handle Moves ... 185°
Arm Moves ... 65°

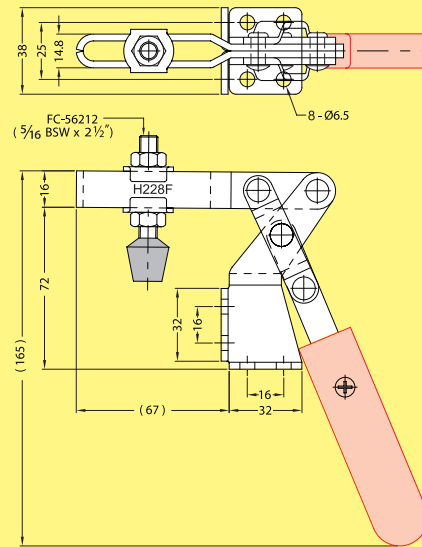

unit : mm

Model : H384, H384B

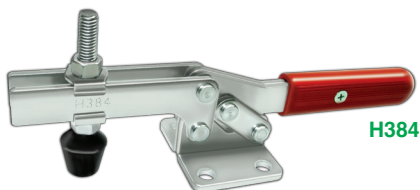


H384



H384B


Holding Capacity : 500kg MAX
Weight : 750g

Handle Moves ... 85°
Arm Moves ... 65°

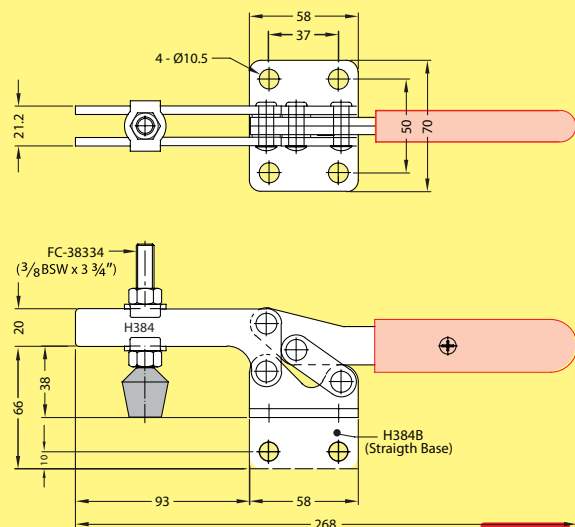


unit : mm

Model : H209, H209B




H209

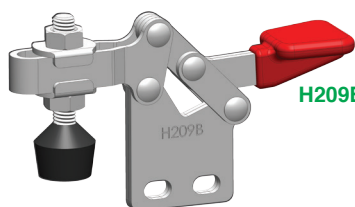

H209B

Holding Capacity : 50kg MAX
Weight : 52g

Handle Moves ... 100°
Arm Moves ... 80°

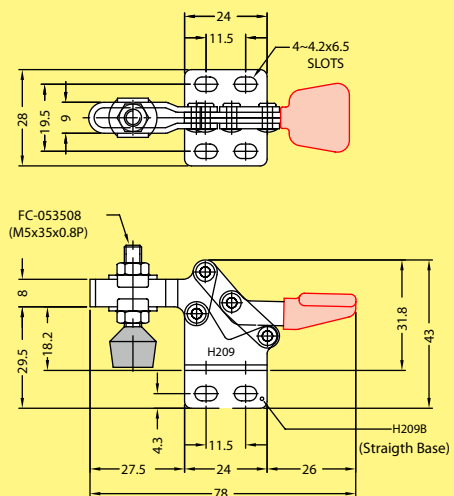


unit : mm




H208

H208B


unit : mm

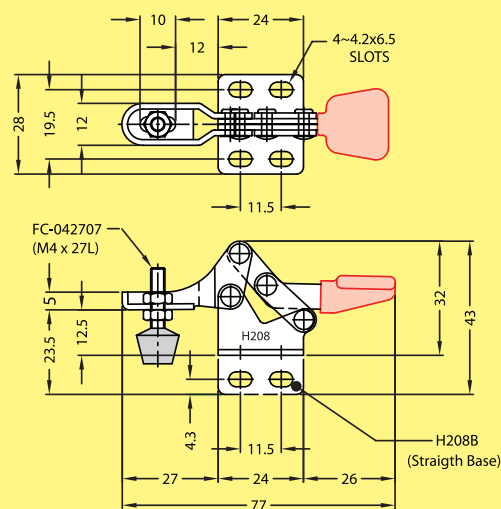

unit : mm

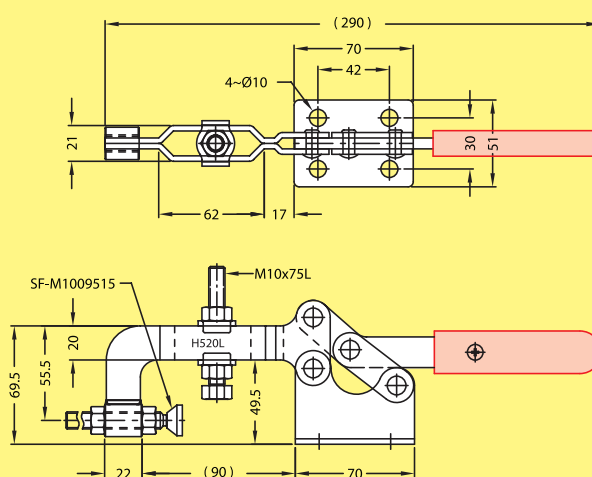


unit : mm

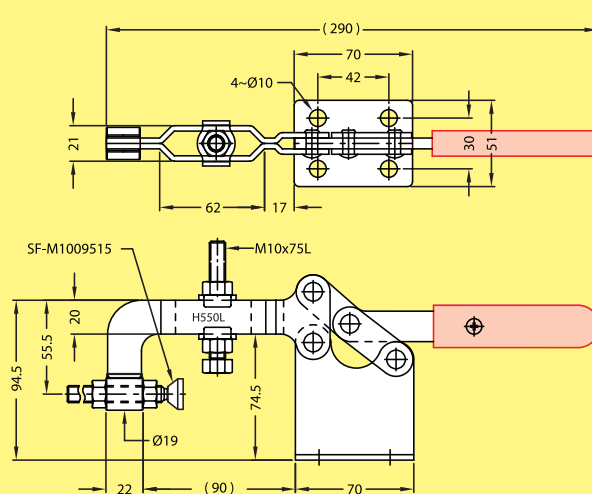




**VERTICAL
HANDLE**
• TOGGLE CLAMP •

Model : V101

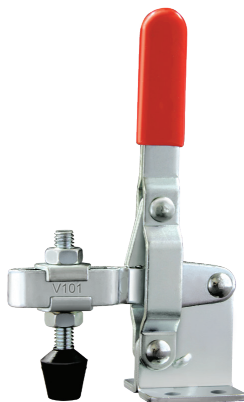


Holding Capacity : 180kg MAX
Weight : 330g

Handle Moves ... 60°
Arm Moves ... 100°

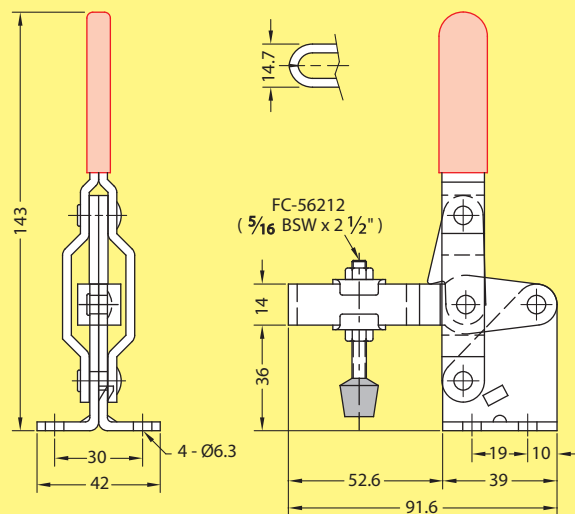


unit : mm

Model : V105

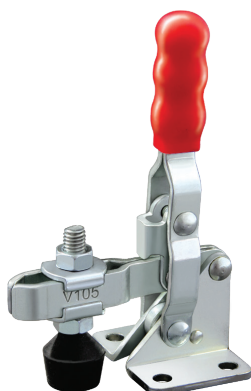

Holding Capacity : 50kg MAX
Weight : 70g

Handle Moves ... 56°
Arm Moves ... 100°

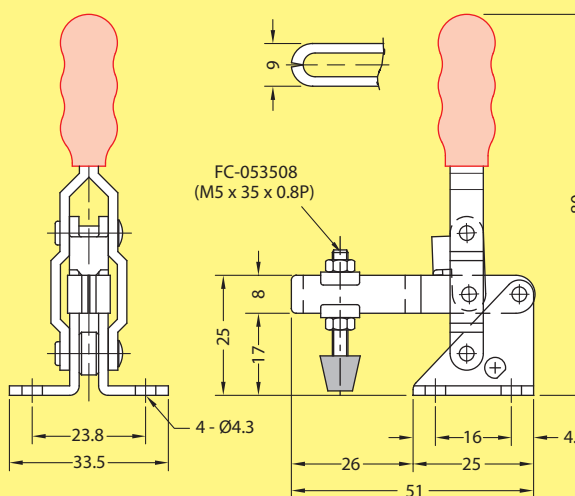

unit : mm


Model : V108

*Also available in Stainless Steel
Model : V108SS
(Stainless steel models are supplied with stainless steel hex. bolt 1/4 BSW x 1 3/4")



Holding Capacity : 100kg MAX
Weight : 120g

Handle Moves ... 65°
Arm Moves ... 90°

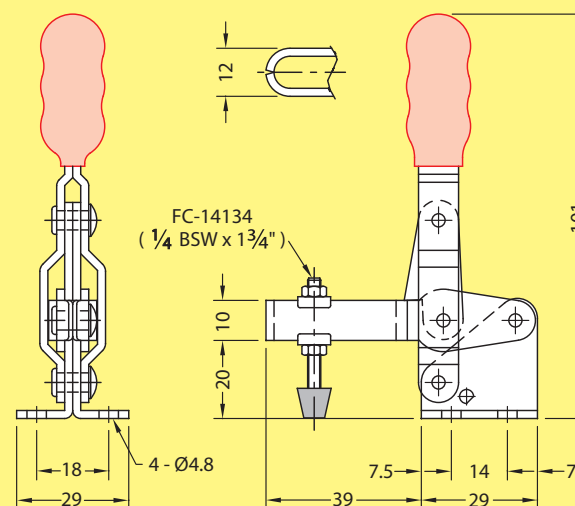

unit : mm

VERTICAL HANDLE

• TOGGLE CLAMP •



JSCLAMP

HIGH QUALITY TOGGLE CLAMP

Model : V108F

*Also available in Stainless Steel


Model : V108FSS

(Stainless steel models are supplied with stainless steel hex. bolt 1/4 BSW x 1 3/4")



Holding Capacity : 100kg MAX
Weight : 139g

Handle Moves ... 65°
Arm Moves ... 90°


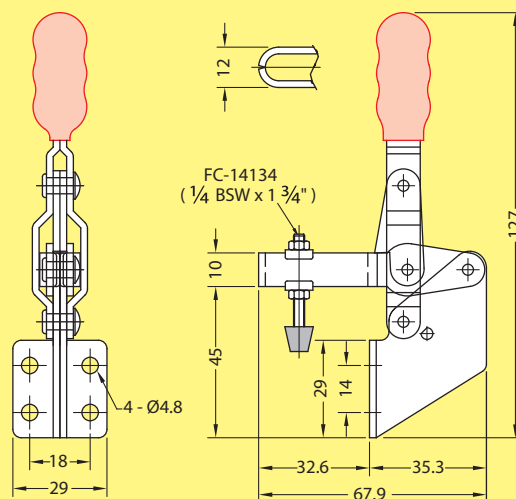


unit : mm

Model : V110-L, V110-L1


V110-L

V110-L1

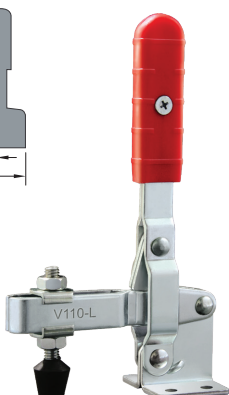

Holding Capacity : 200kg MAX
Weight : 450g, 475g

Handle Moves ... 67°
Arm Moves ... 112°

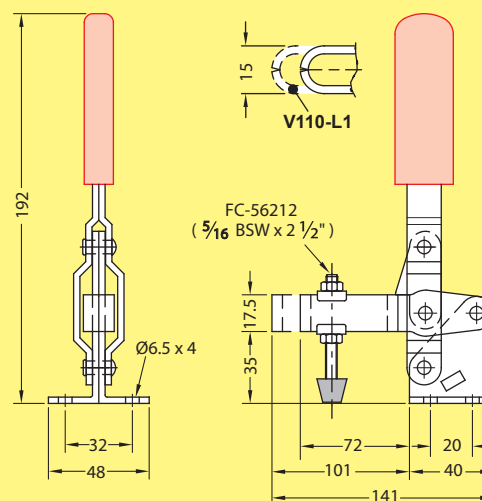

unit : mm

Model : V120R, V120RB



*Also available in Stainless Steel

Model : V120RSS, V120RBSS

(Stainless steel models are supplied with stainless steel hex. bolt 1/4 BSW x 1 3/4")


V120R

V120RB



Holding Capacity : 91kg MAX
Weight : 158g

Handle Moves ... 60°
Arm Moves ... 100°

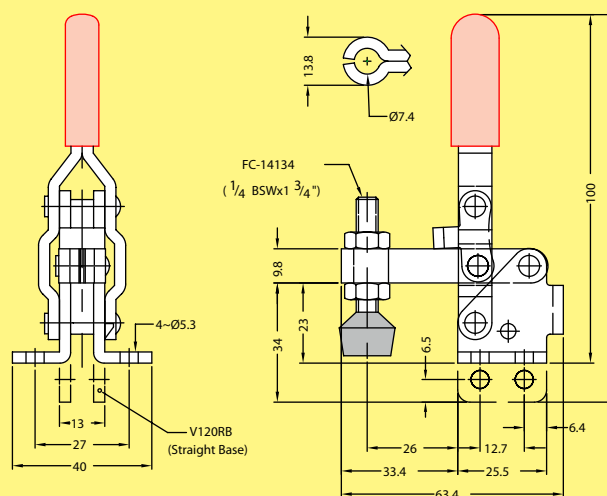


unit : mm




**VERTICAL
HANDLE
• TOGGLE CLAMP •**

Model : V125

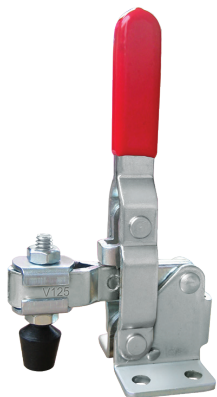


Holding Capacity : 177kg MAX
Weight : 279g

Handle Moves ... 60°
Arm Moves ... 100°

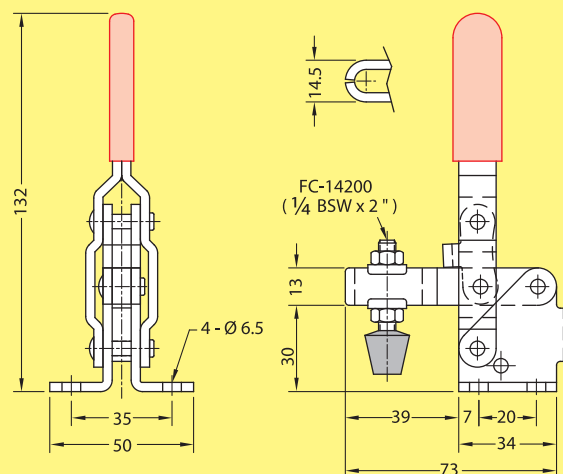


unit : mm

Model : V125R

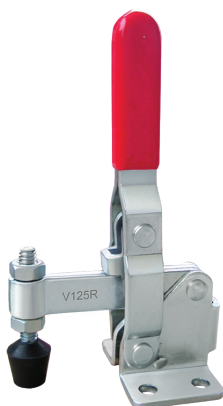


Holding Capacity : 177kg MAX
Weight : 265g

Handle Moves ... 60°
Arm Moves ... 100°

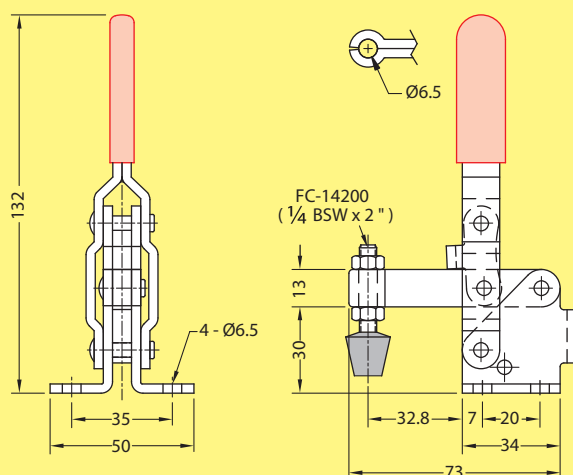


unit : mm

Model : V130, V130L

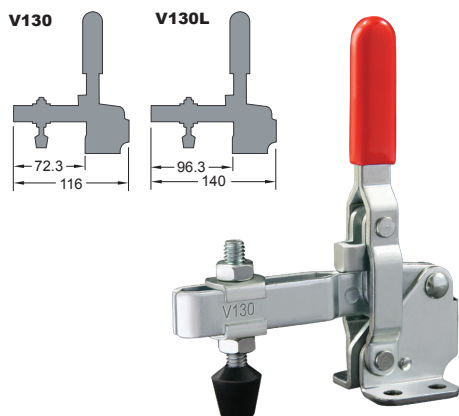

Holding Capacity : 227kg MAX
Weight : 364g, 381g

Handle Moves ... 60°
Arm Moves ... 100°

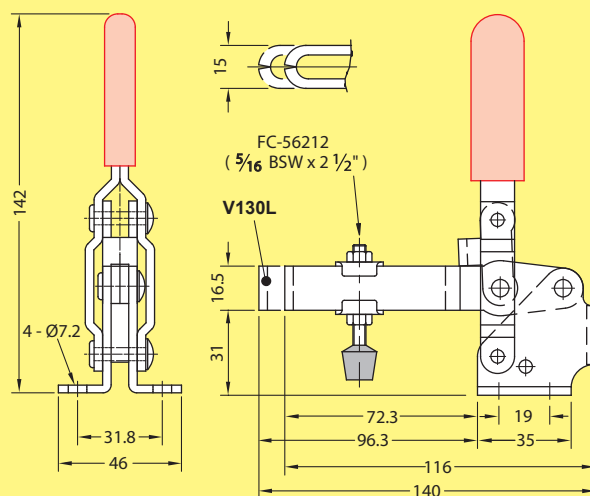

unit : mm

VERTICAL HANDLE

• TOGGLE CLAMP •




JSCLAMP

HIGH QUALITY TOGGLE CLAMP

Model : V141, V141B

V141


V141B



*Also available in Stainless Steel

Model : V141SS, V141BSS

(Stainless steel models are supplied with stainless steel hex. bolt 1/4 BSW x 1 1/4")

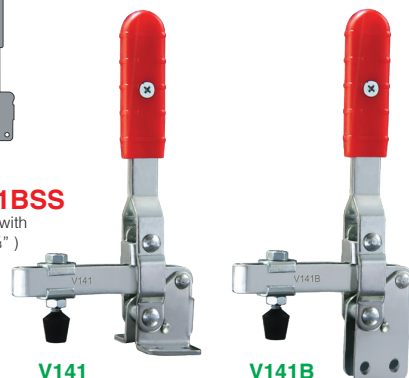


V141

V141B


Holding Capacity : 200kg MAX
Weight : 412g, 412g

Handle Moves ... 64°
Arm Moves ... 110°

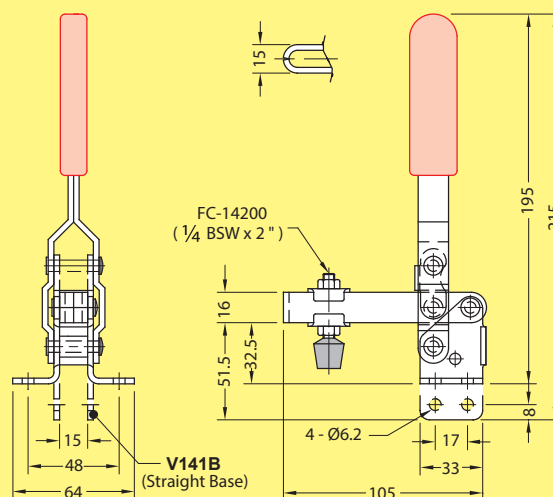


unit : mm

Model : V150

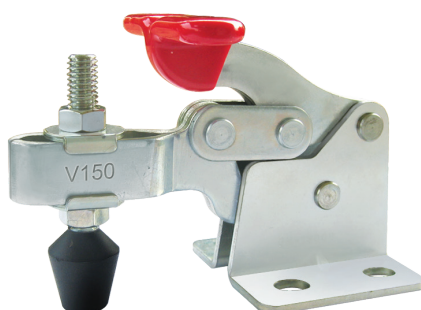

Holding Capacity : 68kg MAX
Weight : 63g

Handle Moves ... 175°
Arm Moves ... 92°

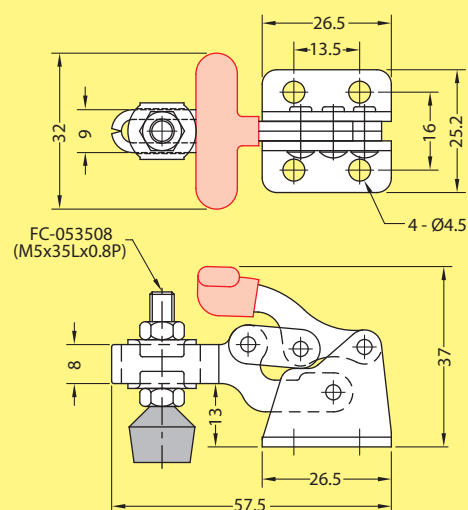


unit : mm

Model : V160



Holding Capacity : 150kg MAX
Weight : 269g

Handle Moves ... 175°
Arm Moves ... 92°

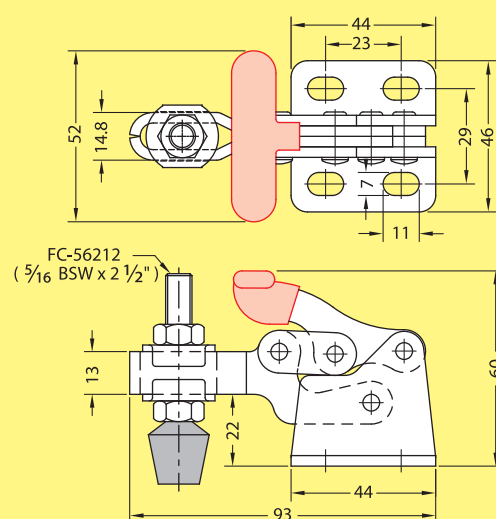

unit : mm




**VERTICAL
HANDLE
• TOGGLE CLAMP •**

Model : V170






Holding Capacity : 320kg MAX
Weight : 630g

Handle Moves ... 175°
Arm Moves ... 92°

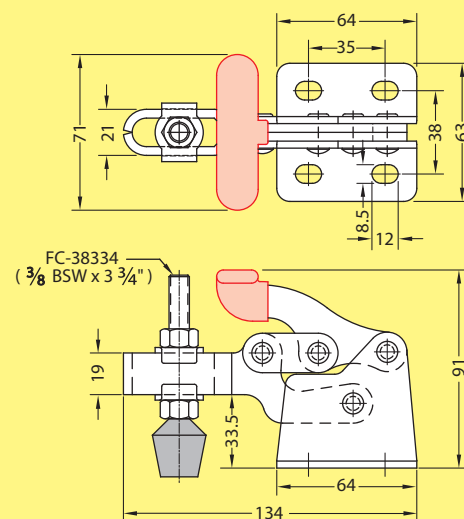

unit : mm

Model : V210, V210B

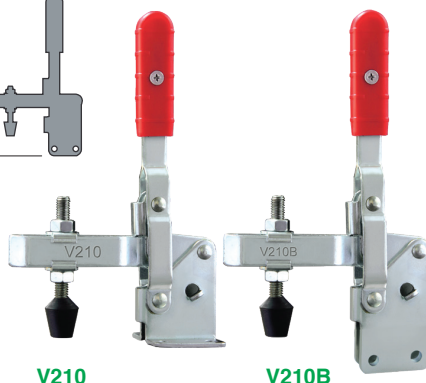


V210

V210B

Holding Capacity : 340kg MAX
Weight : 696g, 696g

Handle Moves ... 58°
Arm Moves ... 105°

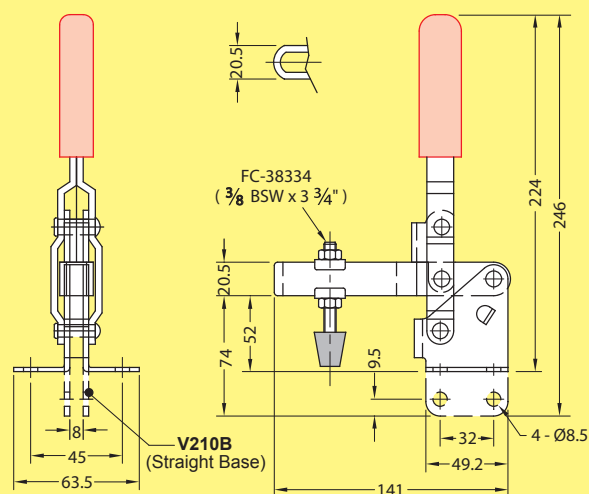


unit : mm

Model : V310



Holding Capacity : 450kg MAX
Weight : 1294g

Handle Moves ... 63°
Arm Moves ... 101°

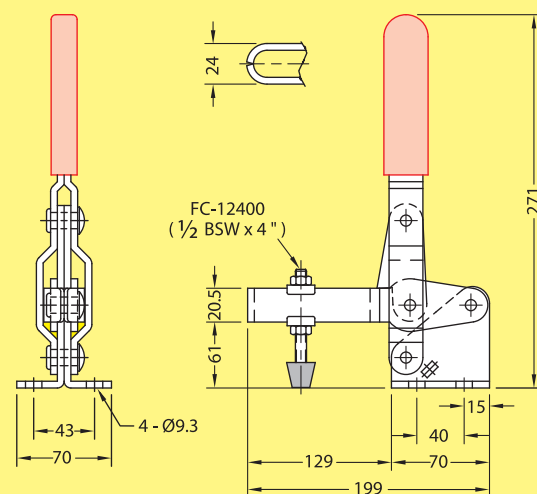

unit : mm

VERTICAL HANDLE

• TOGGLE CLAMP •



JSCLAMP




HIGH QUALITY TOGGLE CLAMP

Model

Description

Weight

V247U	U-Bar, Flanged Base	1345g
V247UB	U-Bar, Straight Base	1279g
V247S	Solid Bar, Flanged Base	1194g
V247SB	Solid Bar, Straight Base	1114g

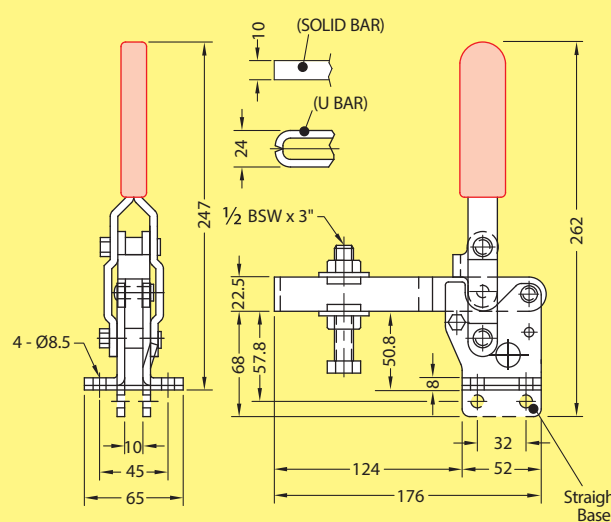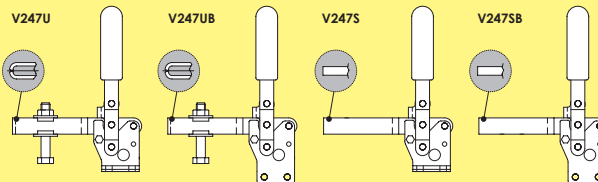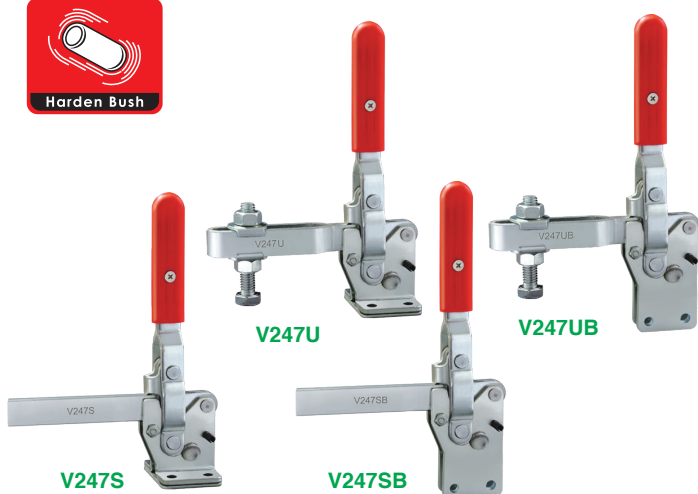


unit : mm

Holding Capacity : 450kg MAX


Handle Moves ... 58°
Arm Moves ... 100°

Usage

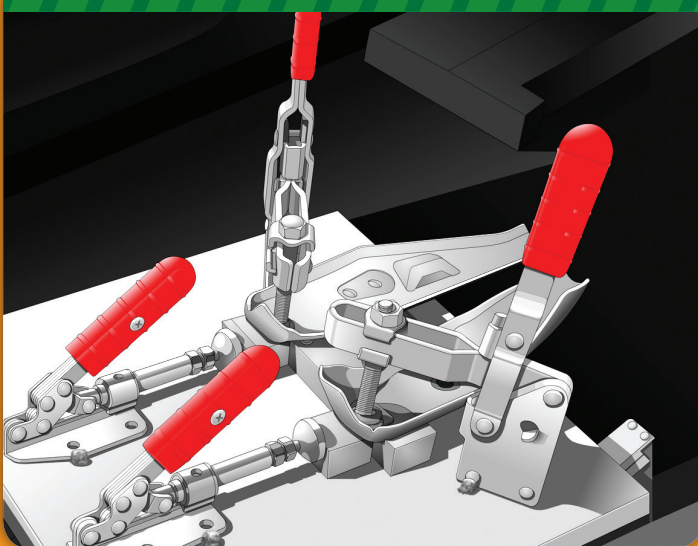


Usage – Horizontal Handle


Step 01



Step 03




Step 02



Step 04




Step 05

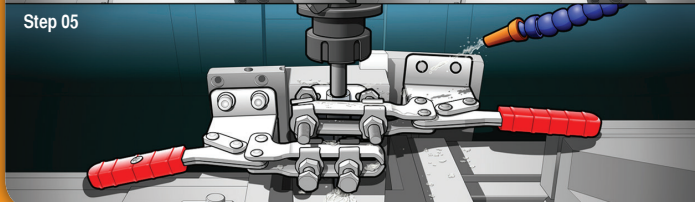




**VERTICAL
HANDLE
• TOGGLE CLAMP •**

Model : V130B, V130BL

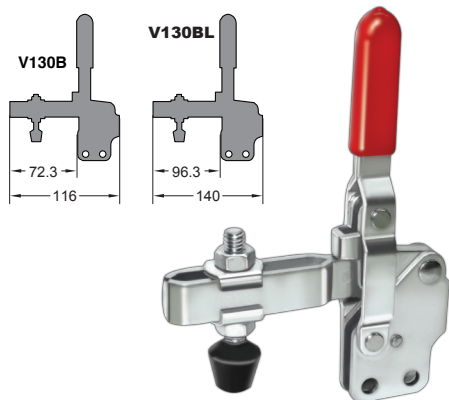


Holding Capacity : 227kg MAX
Weight : 365g, 379g

Handle Moves ... 60°
Arm Moves ... 100°

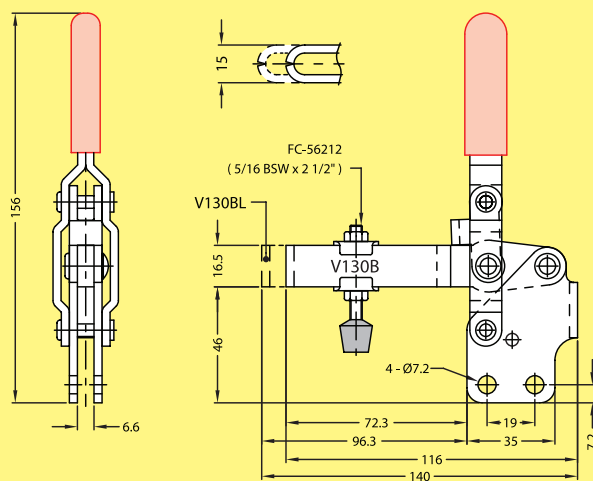


unit : mm

Model : V130S, V130LS

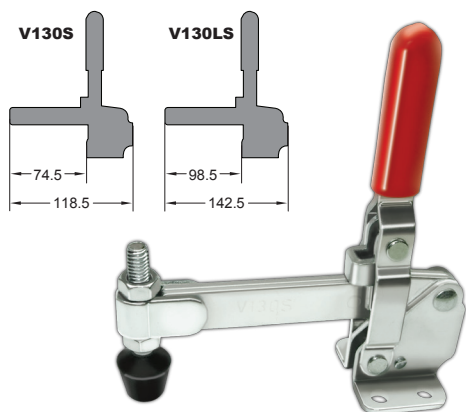


Holding Capacity : 227kg MAX
Weight : 372g, 388g

Handle Moves ... 60°
Arm Moves ... 100°

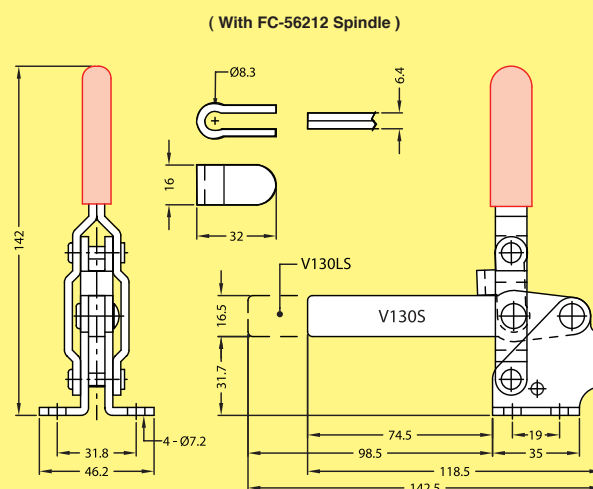


unit : mm

Model : V130SB, V130LSB

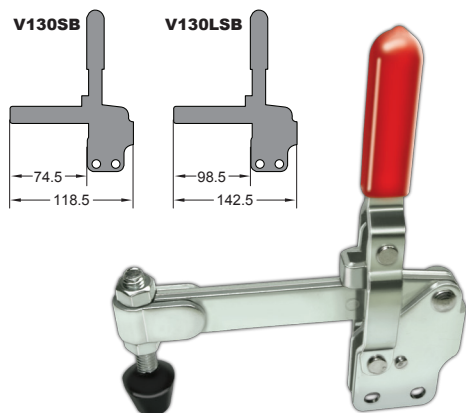

Holding Capacity : 227kg MAX
Weight : 369g, 394g

Handle Moves ... 60°
Arm Moves ... 100°

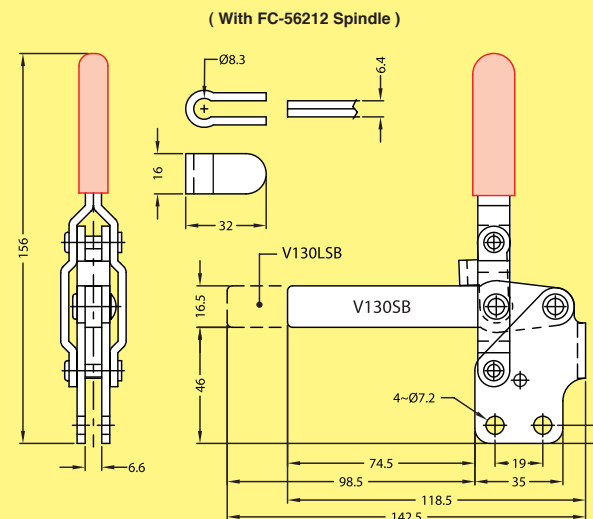

unit : mm

• TOGGLE CLAMP •



JSCLAMP

HIGH QUALITY TOGGLE CLAMP

Model : V120, V120B




V120



V120B

Holding Capacity : 91kg MAX
Weight : 160g, 160g

Handle Moves ... 60°
Arm Moves ... 100°

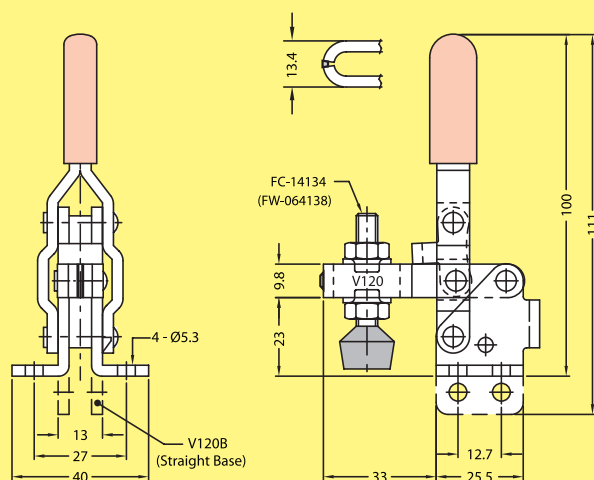

unit : mm

Model : V142, V142B




V142



V142B

Holding Capacity : 200kg MAX
Weight : 370g, 370g

Handle Moves ... 56°
Arm Moves ... 100°

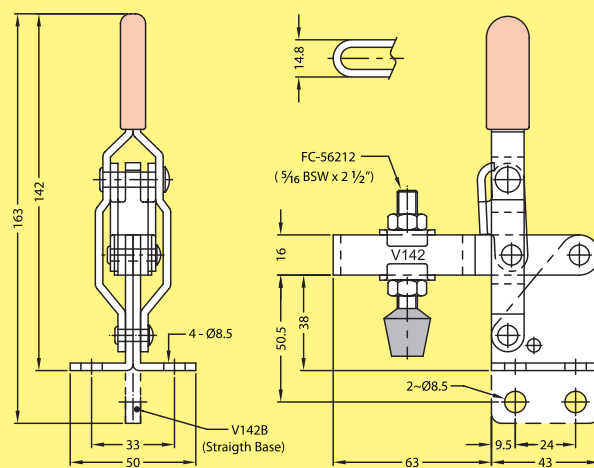

unit : mm

Model : V208, V208B




V208



V208B

Holding Capacity : 30kg MAX
Weight : 48g, 48g

Handle Moves ... 100°
Arm Moves ... 80°


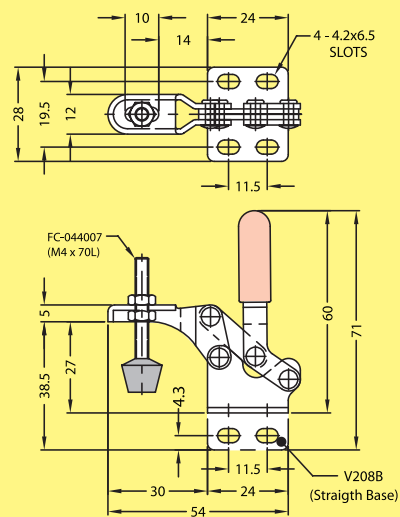


unit : mm



**VERTICAL
HANDLE
• TOGGLE CLAMP •**

Model : V145S

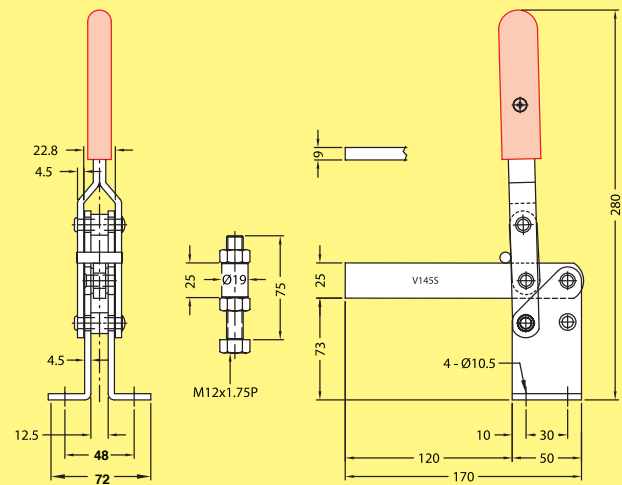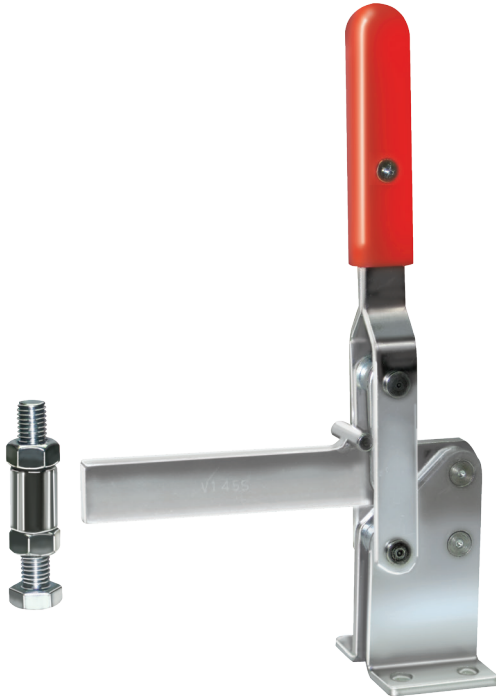


unit : mm

Holding Capacity : 400kg MAX
Weight : 1235g

Handle Moves ... 93°
Arm Moves ... 170°

Model : V145SB

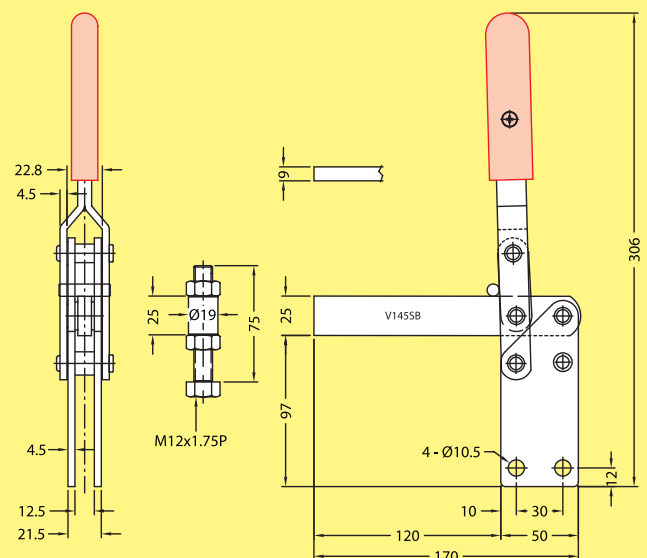

unit : mm

Holding Capacity : 400kg MAX
Weight : 1235g

Handle Moves ... 93°
Arm Moves ... 170°

VERTICAL HANDLE


• TOGGLE CLAMP •



JSCLAMP

HIGH QUALITY TOGGLE CLAMP

Model : V145SB4


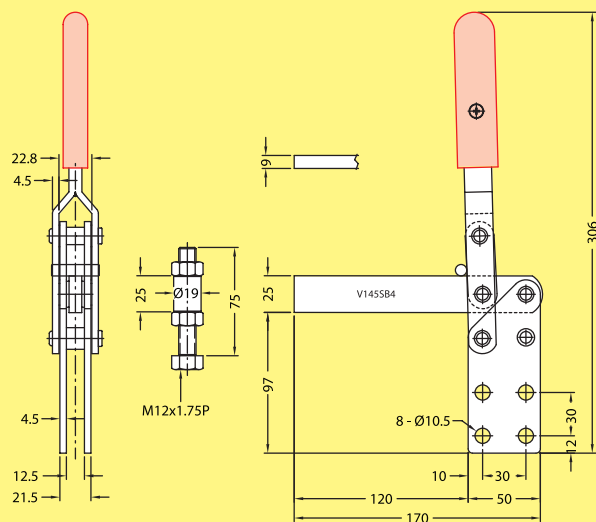


Holding Capacity : 400kg MAX
Weight : 1213g

Handle Moves ... 93°
Arm Moves ... 170°

unit : mm

Model : V145BN

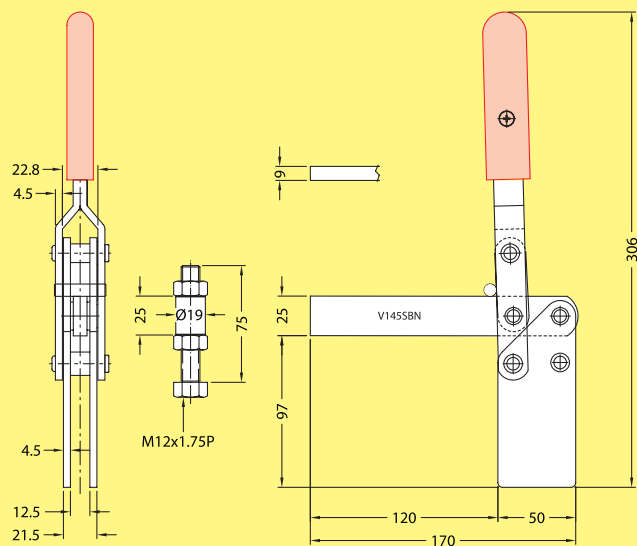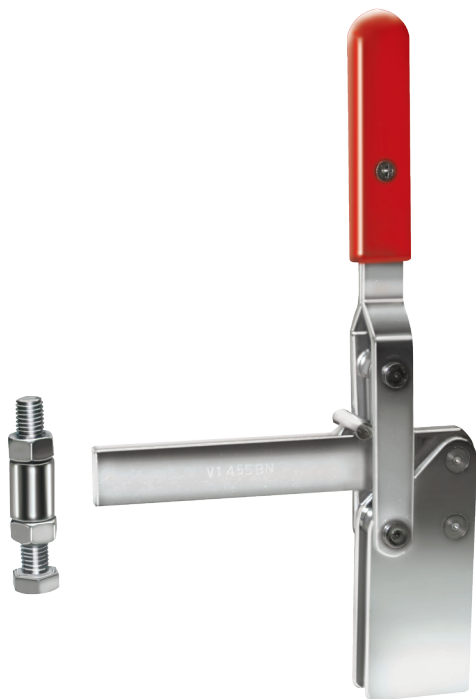

Holding Capacity : 400kg MAX
Weight : 1252g


Handle Moves ... 93°
Arm Moves ... 170°

unit : mm




**VERTICAL
HANDLE
• TOGGLE CLAMP •**

Model : V209, V209B

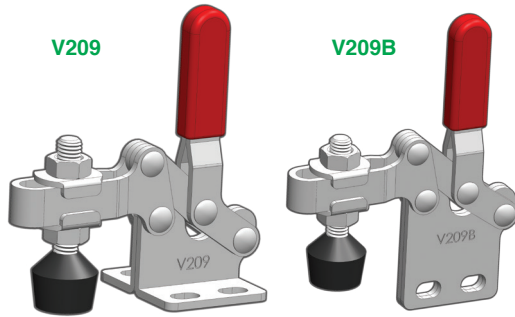


Holding Capacity : 50kg MAX
Weight : 56g

Handle Moves ... 100°
Arm Moves ... 8°

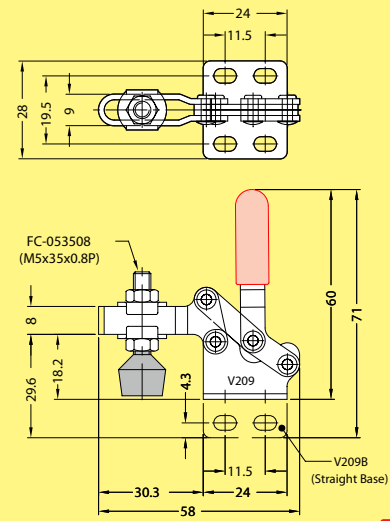


unit : mm

Model : V210S, V210SB

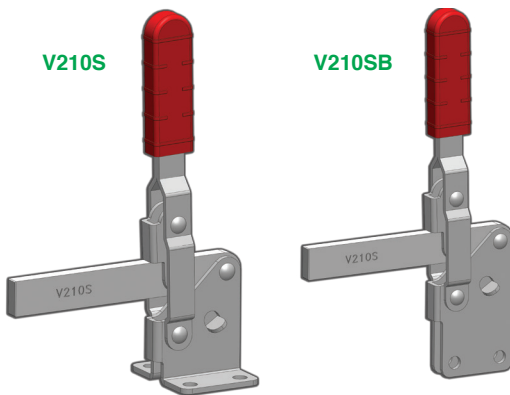


Holding Capacity : 340kg MAX
Weight : 592g

Handle Moves ... 58°
Arm Moves ... 105°

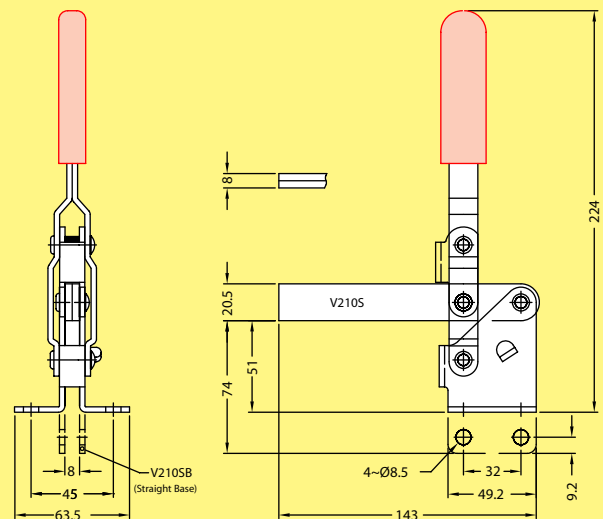


unit : mm

Usage

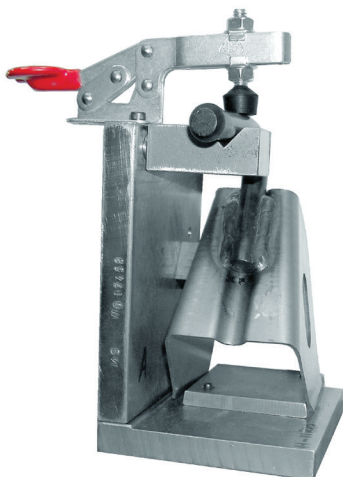

Usage

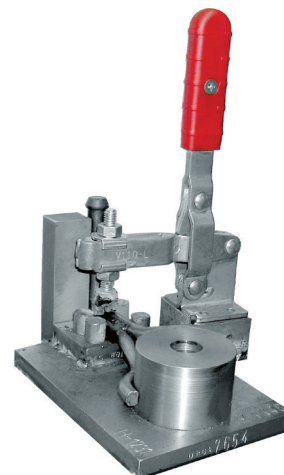


PUSH / PULL TYPE

• TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : P102

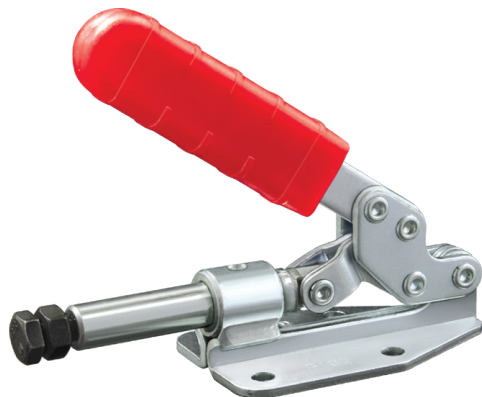


Holding Capacity : 200kg MAX
Weight : 381g

Handle Moves ... 150°
Travel ... 30mm

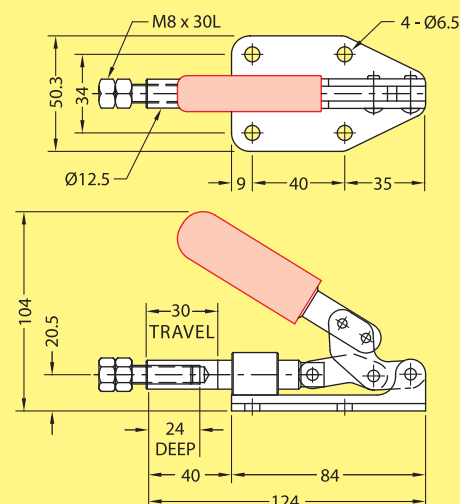


unit : mm

Model : P115

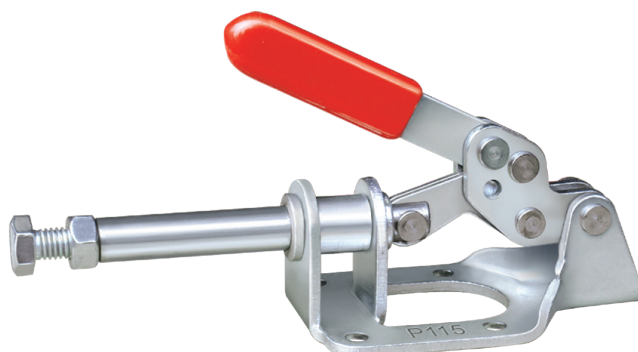


Holding Capacity : 136kg MAX
Weight : 310g

Handle Moves ... 180°
Travel ... 32mm

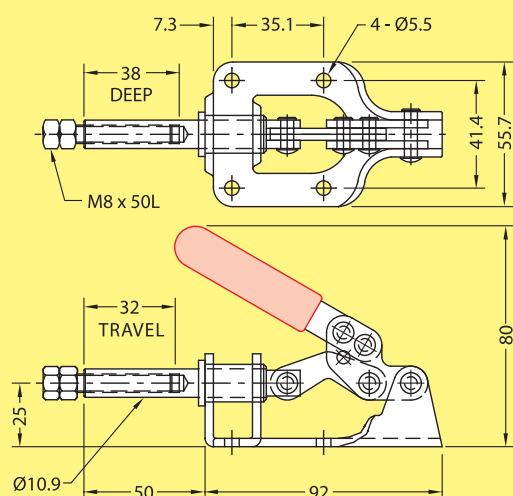


unit : mm

Model : P125

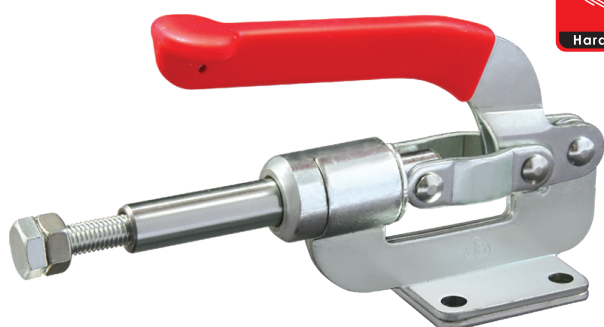

Holding Capacity : 364kg MAX
Weight : 875g

Handle Moves ... 180°
Travel ... 41mm

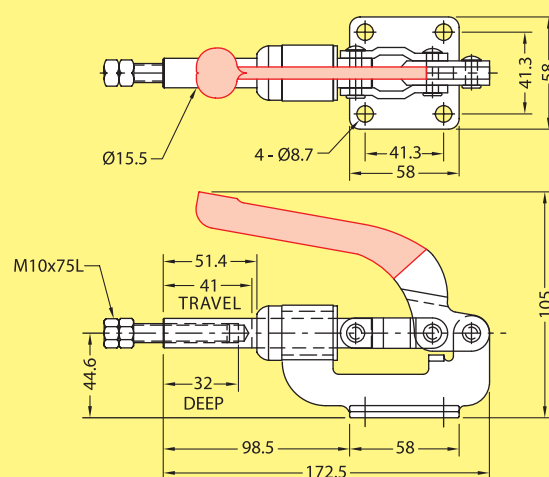

unit : mm



**PUSH / PULL
TYPE
• TOGGLE CLAMP •**

Model : P130




*Also available in Stainless Steel

Model : P130SS

(Stainless steel models are supplied with stainless steel hex. bolt M4 x 20L.)

**Holding Capacity : 45kg MAX
Weight : 44g**

**Handle Moves ... 190°
Travel ... 17mm**

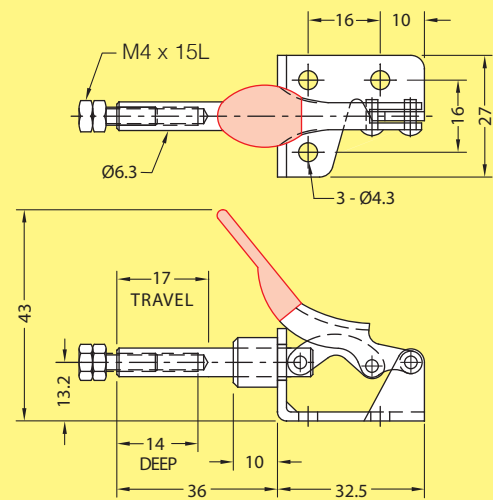


unit : mm

Model : P150



**Holding Capacity : 200kg MAX
Weight : 390g**

**Handle Moves ... 190°
Travel ... 30mm**

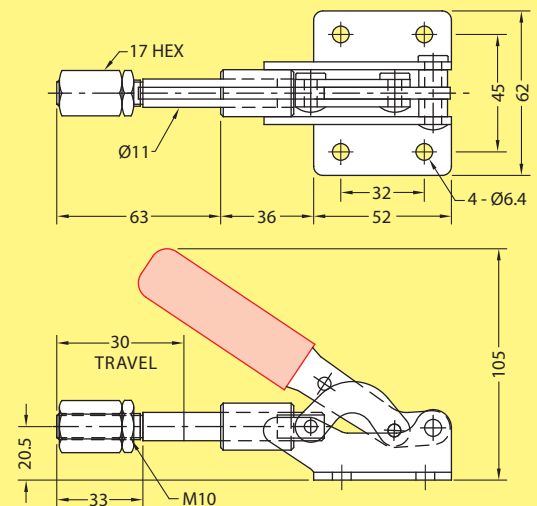


unit : mm

Model : P152



**Holding Capacity : 454kg MAX
Weight : 960g**

**Handle Moves ... 190°
Travel ... 50mm**

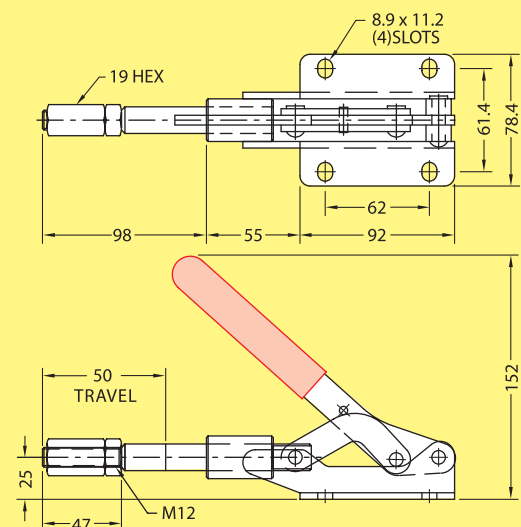

unit : mm

PUSH / PULL TYPE

• TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : P107



Holding Capacity : 50kg MAX
Weight : 101g

Handle Moves ... 66°
Travel ... 10mm

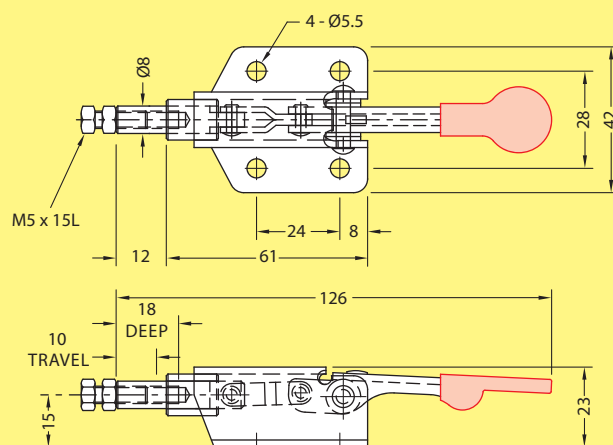


unit : mm

Model : P154



Holding Capacity : 160kg MAX
Weight : 496g

Handle Moves ... 45°
Travel ... 15mm

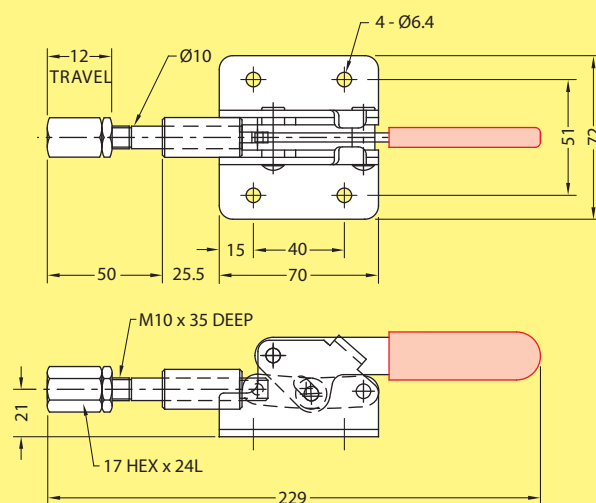


unit : mm

Model : P156



Holding Capacity : 295kg MAX
Weight : 1260g

Handle Moves ... 45°
Travel ... 23mm

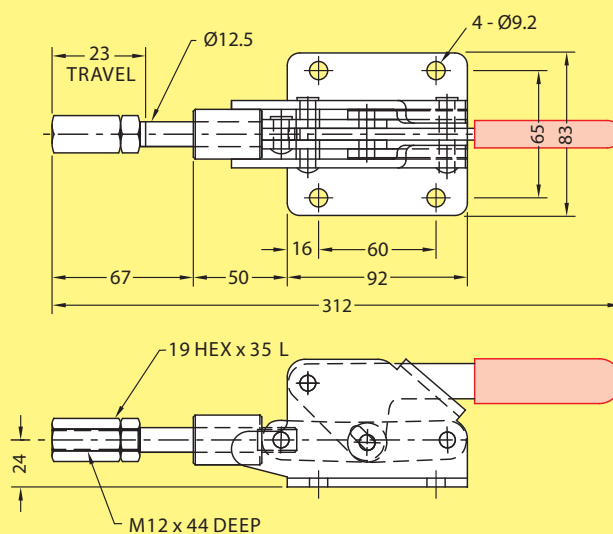


unit : mm




**PUSH / PULL
TYPE
• TOGGLE CLAMP •**

Model : P202

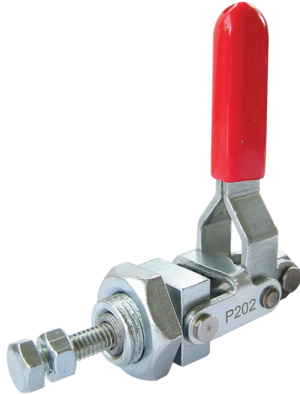

Holding Capacity : 91kg MAX
Weight : 130g

Handle Moves ... 180°
Travel ... 19mm

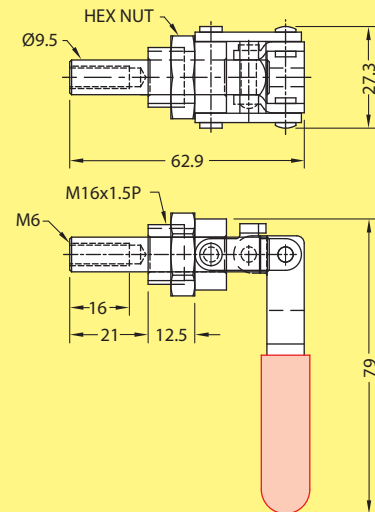

unit : mm


Model : P204

*Also available in Stainless Steel
Model : P204SS



Holding Capacity : 136kg MAX
Weight : 291g

Handle Moves ... 180°
Travel ... 38mm

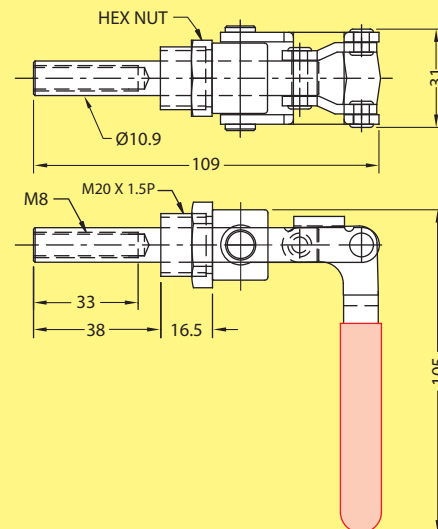


unit : mm

Model : P206



Holding Capacity : 136kg MAX
Weight : 238g

Handle Moves ... 180°
Travel ... 37.6mm

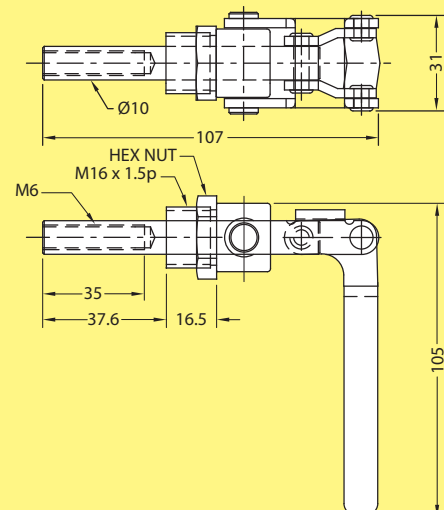

unit : mm

PUSH / PULL TYPE

• TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : P208



Holding Capacity : 318kg MAX
Weight : 767g

Handle Moves ... 180°
Travel ... 67mm

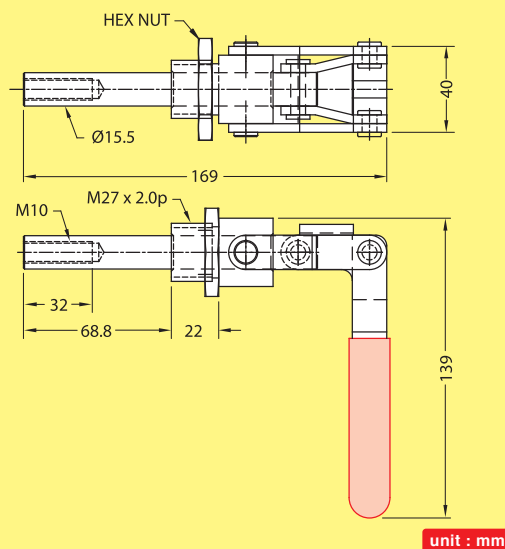


Model : P340




Holding Capacity : 3000kg MAX
Weight : 3100g

Handle Moves ... 180°
Travel ... 101mm

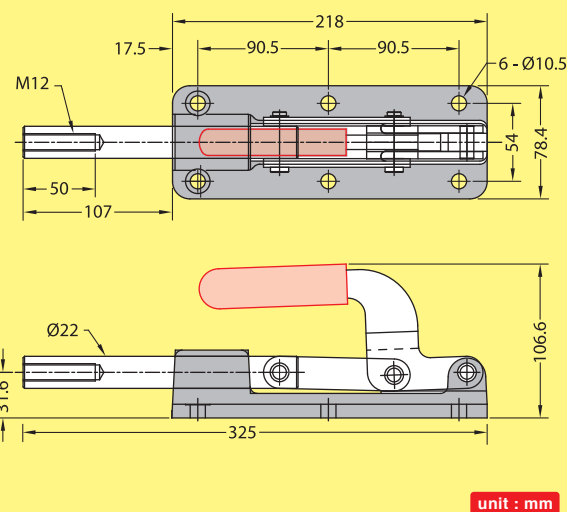


Model : P105

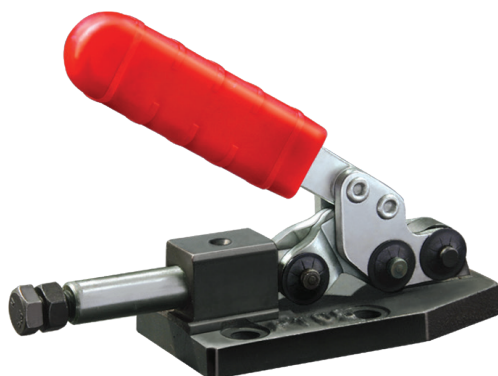

Holding Capacity : 270kg MAX
Weight : 585g

Handle Moves ... 150°
Travel ... 28mm

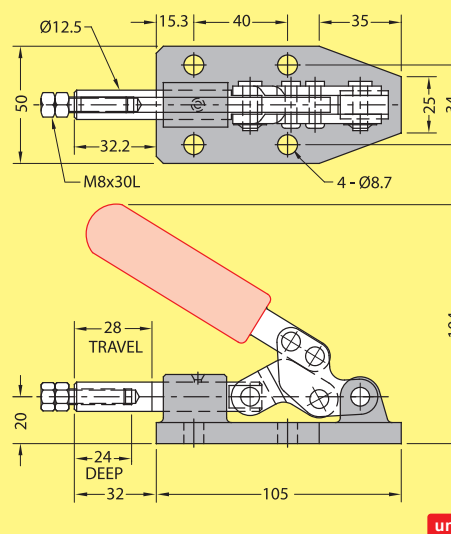




**PUSH / PULL
TYPE
• TOGGLE CLAMP •**

Model : P100




Holding Capacity : 227kg MAX
Weight : 388g

Handle Moves ... 180°
Travel ... 32mm

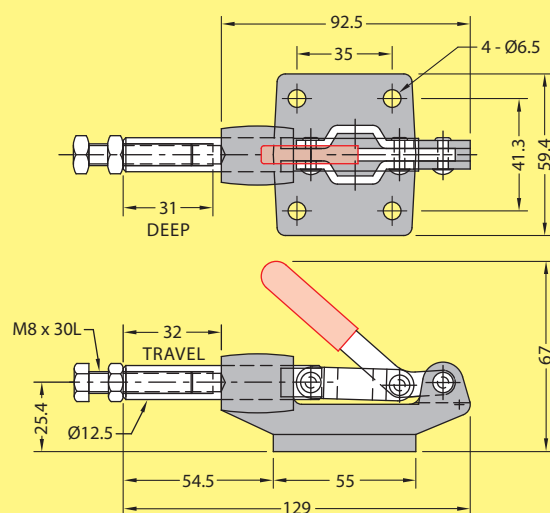


unit : mm

Model : P109

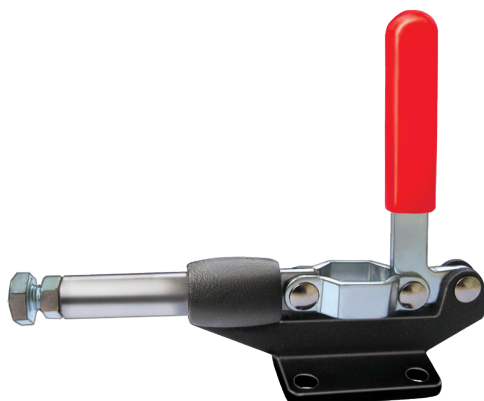


Holding Capacity : 227kg MAX
Weight : 377g

Handle Moves ... 180°
Travel ... 32mm

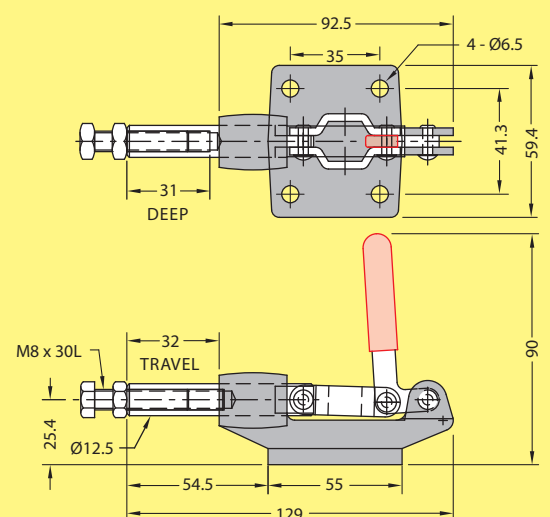


unit : mm

Model : P200

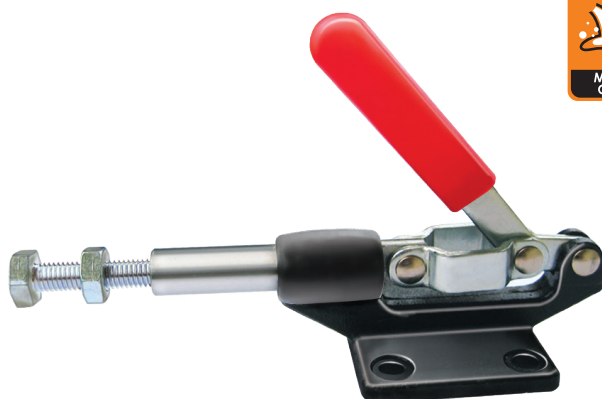

Holding Capacity : 386kg MAX
Weight : 620g

Handle Moves ... 180°
Travel ... 42mm

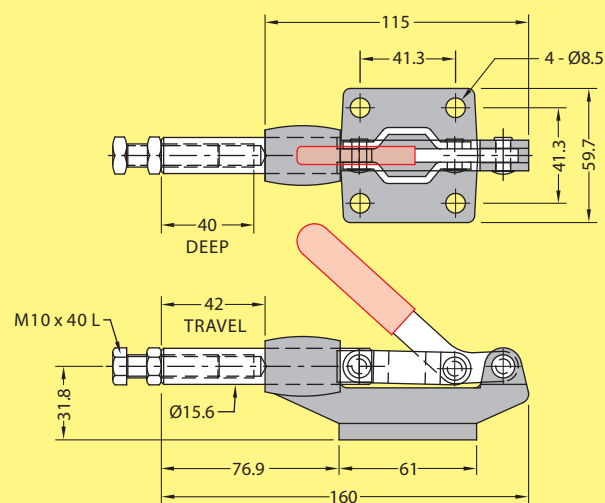


unit : mm

**PUSH / PULL
TYPE**
• TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : P209

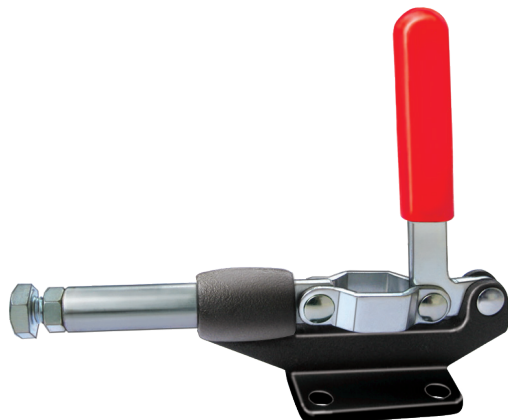

Holding Capacity : 386kg MAX
Weight : 625g

Handle Moves ... 180°
Travel ... 42mm

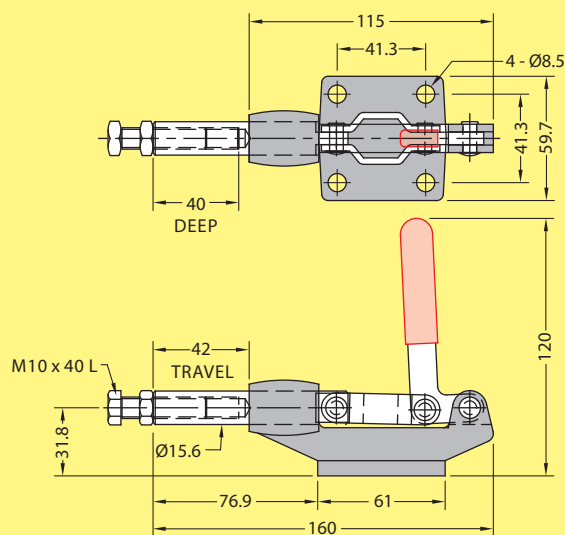


unit : mm

Model : P300



Holding Capacity : 680kg MAX
Weight : 1542g

Handle Moves ... 180°
Travel ... 60mm

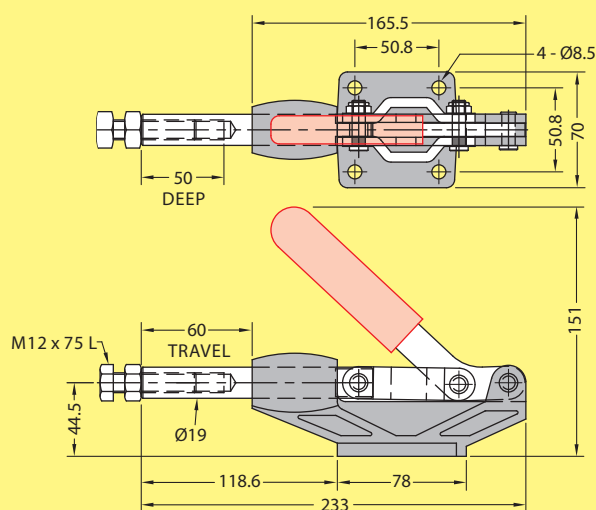


unit : mm

Model : P309



Holding Capacity : 680kg MAX
Weight : 1547g

Handle Moves ... 180°
Travel ... 60mm

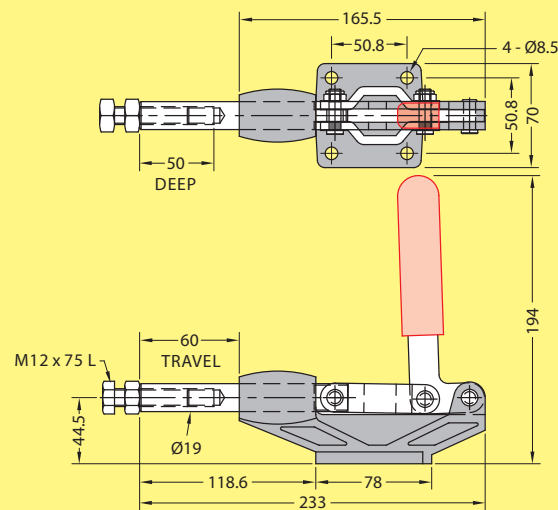


unit : mm




**PUSH / PULL
TYPE**
• TOGGLE CLAMP •

Model : P102S

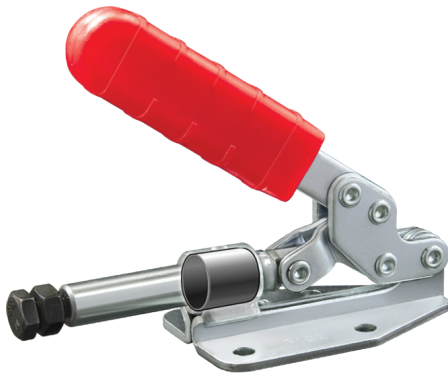

Holding Capacity : 200kg MAX
Weight : 376g

Handle Moves ... 150°
Travel ... 30mm

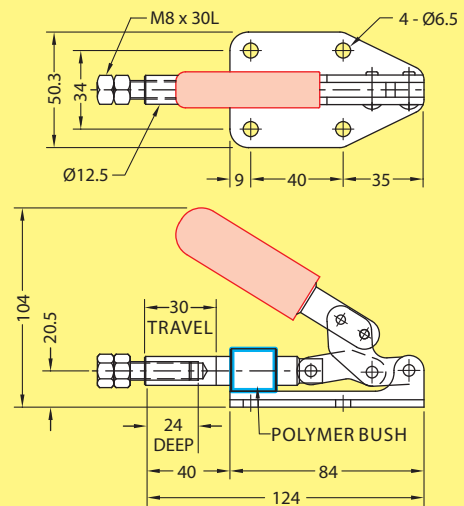

unit : mm



This toggle clamp is similar with P102 but it has longer life if compare with P102 and it is more smooth when doing the push and pull action on it. It is suitable to use in high frequency production because of its wear resistance and accuracy function and it is also suitable to use in clean room. This toggle clamp has very good performance in conducting welding job because it can release the welding carbon dirts automatically if worker forget to applying any oil on it.



Resistance to dust and dirt



Maintenance free, dry running




Cost effective




High wear resistance

Usage

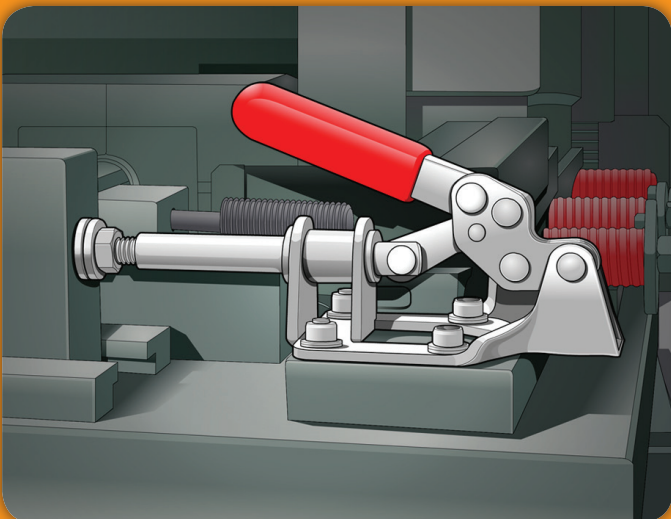

Usage

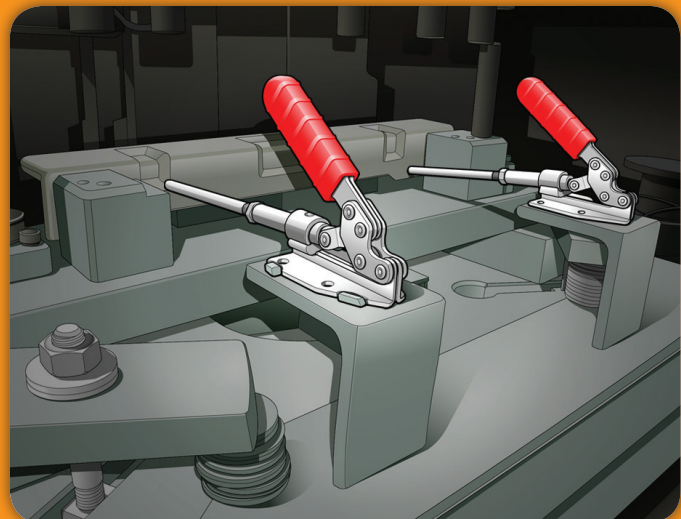


**PUSH / PULL
TYPE**
• TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : P122

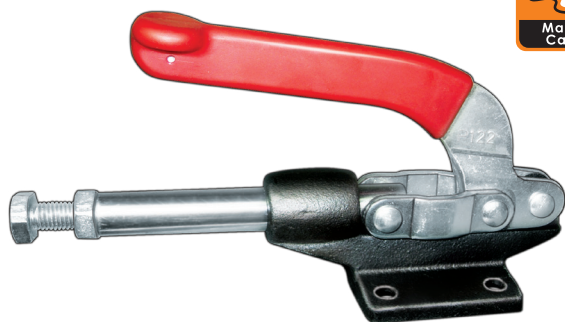


Holding Capacity : 364kg MAX
Weight : 809g

Handle Moves ... 180°
Travel ... 41mm

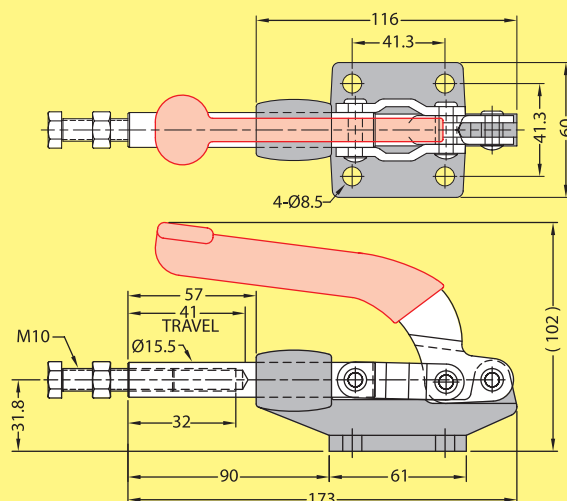


unit : mm

Model : P320

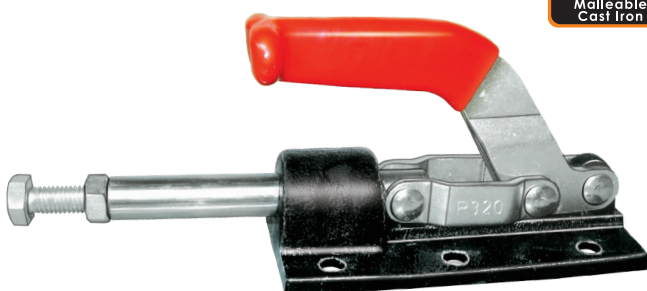


Holding Capacity : 320kg MAX
Weight : 710g

Handle Moves ... 180°
Travel ... 41mm

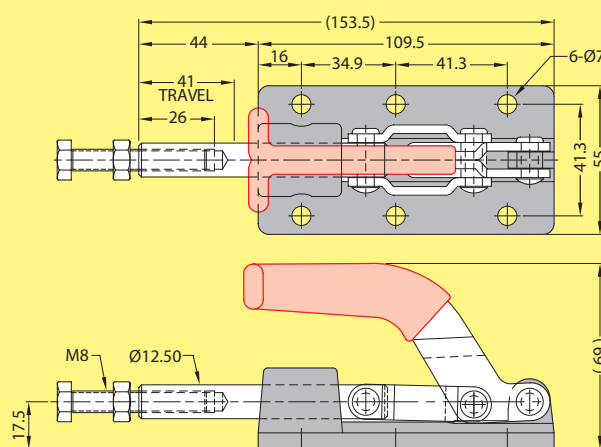


unit : mm

Model : P330

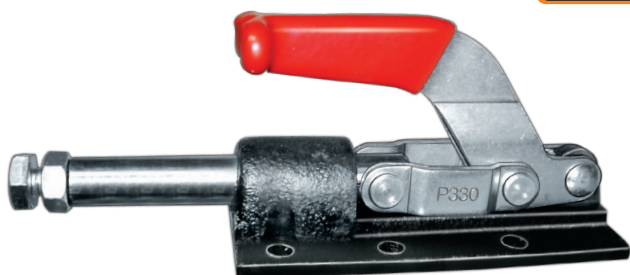

Holding Capacity : 1136kg MAX
Weight : 978g

Handle Moves ... 180°
Travel ... 51mm

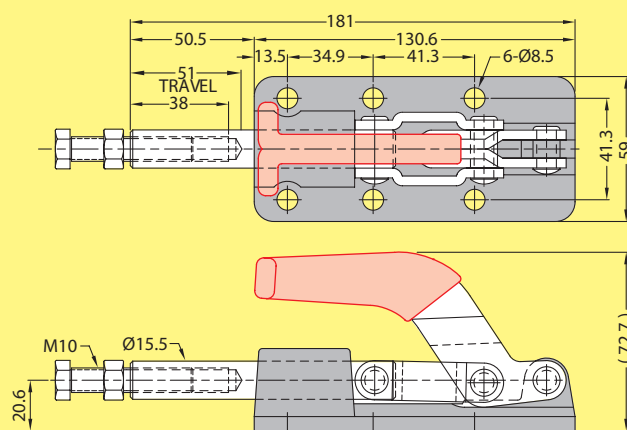

unit : mm




**PUSH / PULL
TYPE
• TOGGLE CLAMP •**

Model : P560




Holding Capacity : 600kg MAX
Weight : 720g

Handle Moves ... 185°
Travel ... 30mm

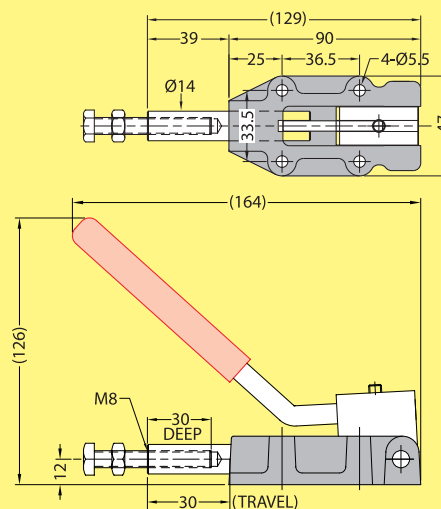


unit : mm

Model : P570

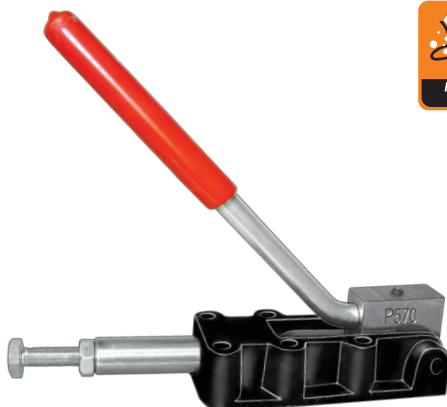


Holding Capacity : 1200kg MAX
Weight : 1800g

Handle Moves ... 185°
Travel ... 51mm

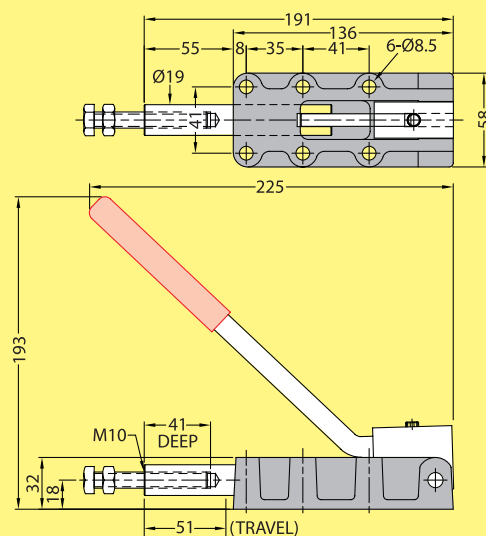


unit : mm

Model : P580

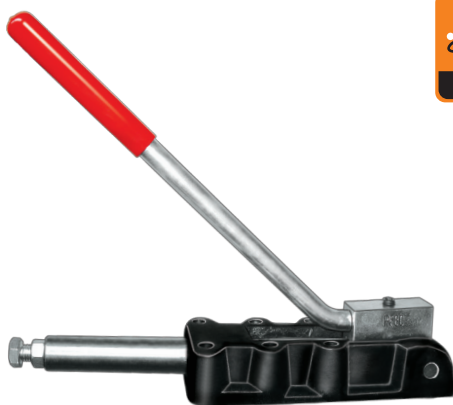

Holding Capacity : 2500kg MAX
Weight : 4281g

Handle Moves ... 185°
Travel ... 78mm

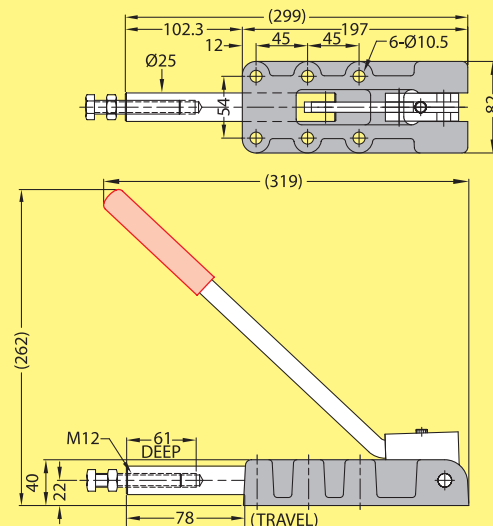

unit : mm


PUSH / PULL TYPE

• TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : P610

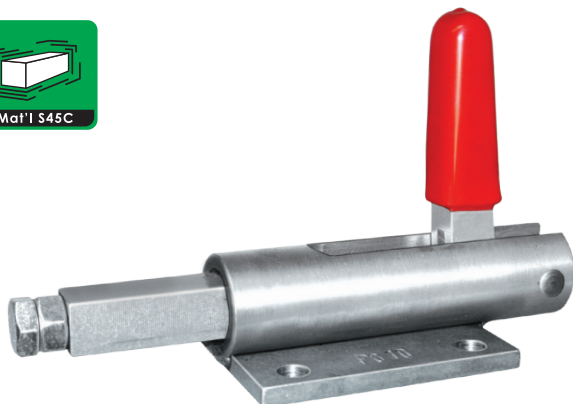


Holding Capacity : 300kg MAX
Weight : 1661g

Handle Moves ... 115°
Travel ... 43mm

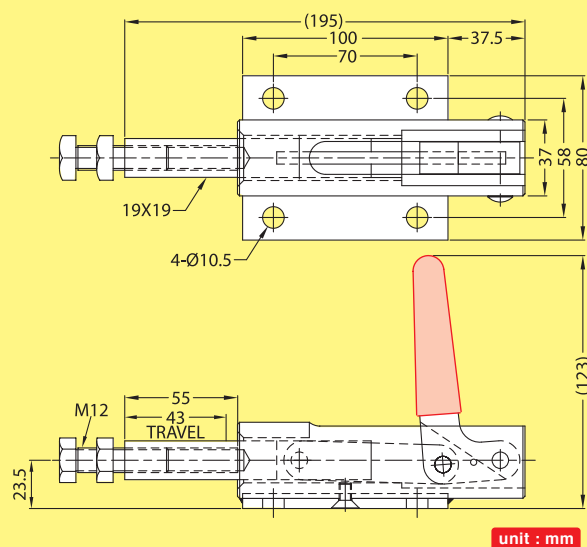


unit : mm

Model : P620

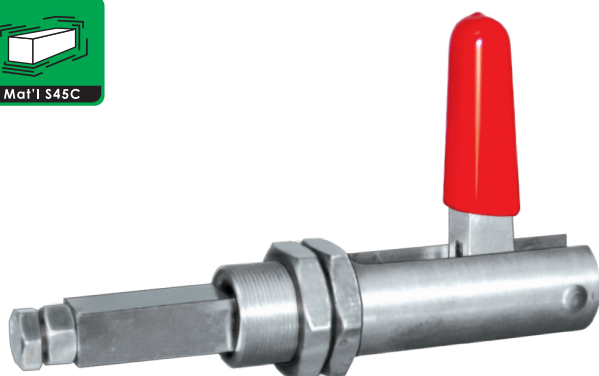


Holding Capacity : 300kg MAX
Weight : 1281g

Handle Moves ... 115°
Travel ... 43mm

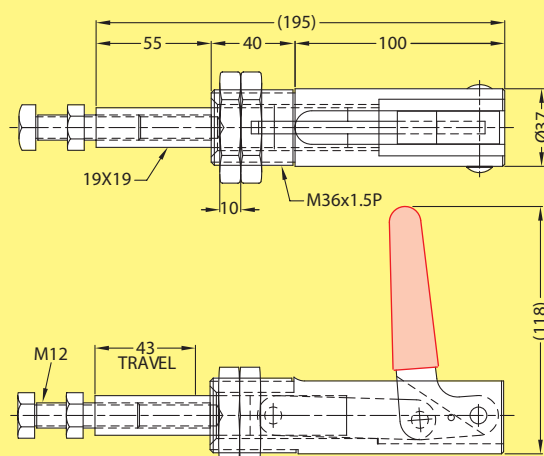


unit : mm

Model : P625

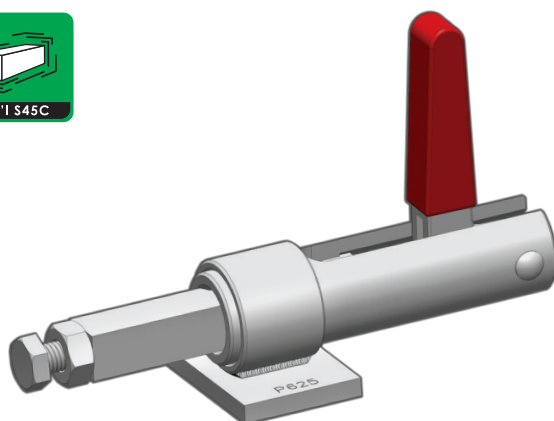

Holding Capacity : 300kg MAX
Weight : 1580g

Handle Moves ... 115°
Travel ... 43mm

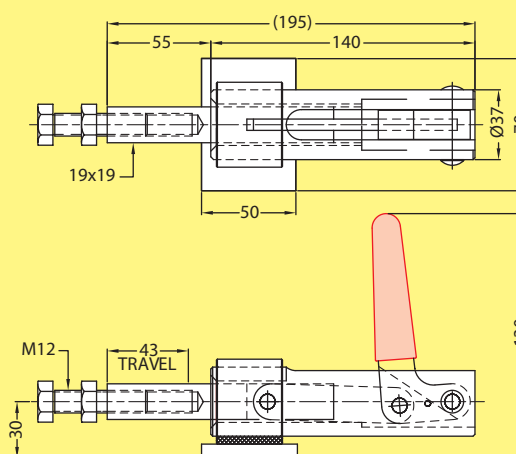


unit : mm




**PUSH / PULL
TYPE
• TOGGLE CLAMP •**

Model : P106

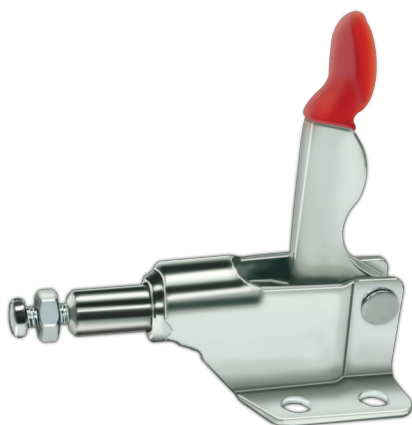


Holding Capacity : 50 kg MAX
Weight : 70g

Handle Moves ... 93°
Travel ... 13mm

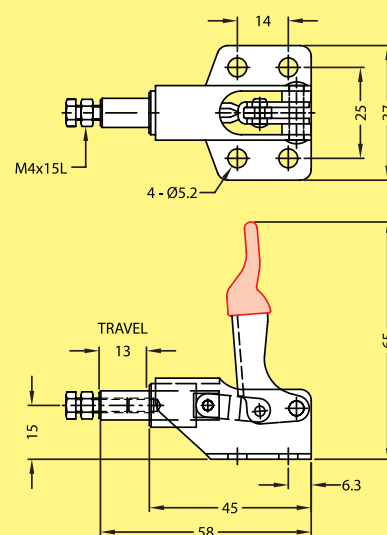


unit : mm

Model : P118

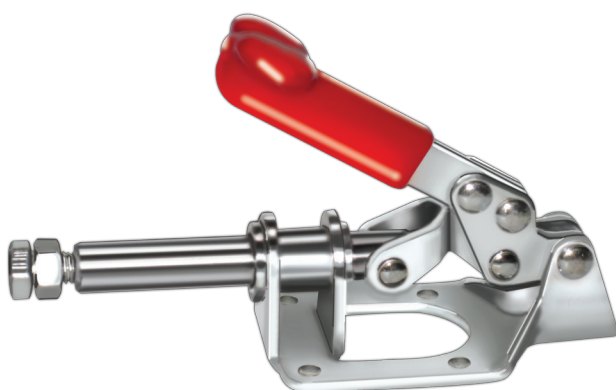

Holding Capacity : 110 kg MAX
Weight : 148g

Handle Moves ... 150°
Travel ... 25mm

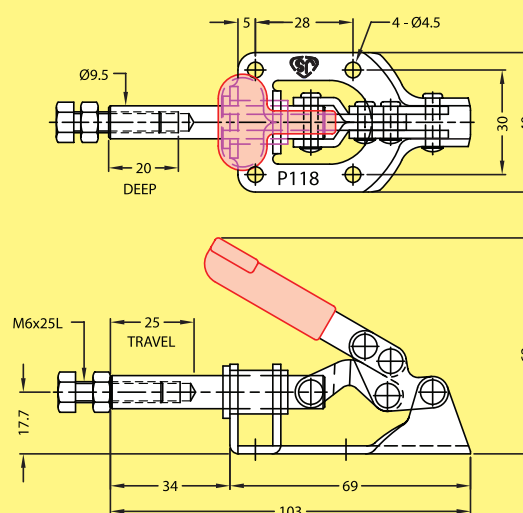


unit : mm

Model : P170



Holding Capacity : 227 kg MAX
Weight : 411g

Handle Moves ... 180°
Travel ... 32mm

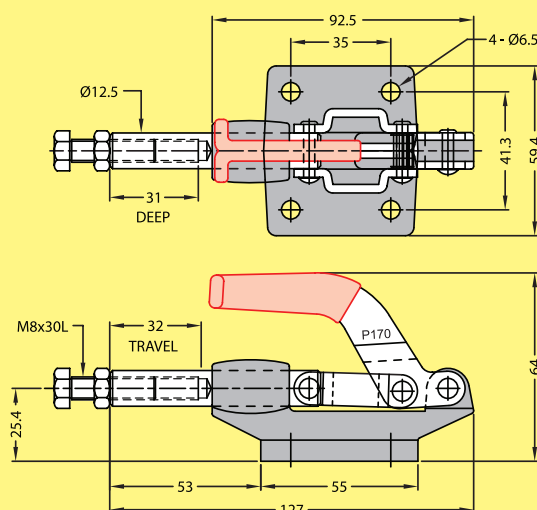

unit : mm


PUSH / PULL TYPE

• TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : P110LH, P110RH

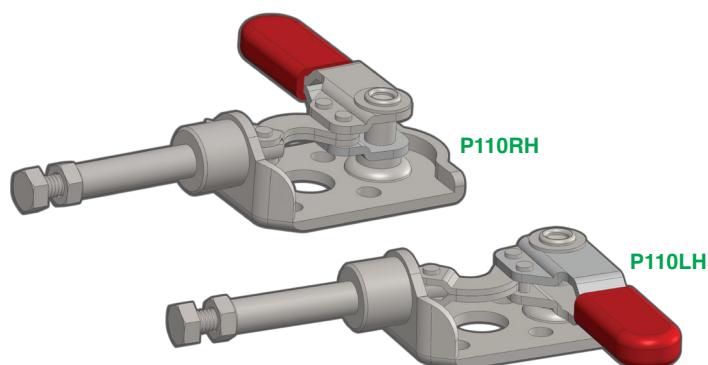


Holding Capacity : 80kg MAX
Weight : 56g

Handle Moves ... 180°
Travel ... 16mm

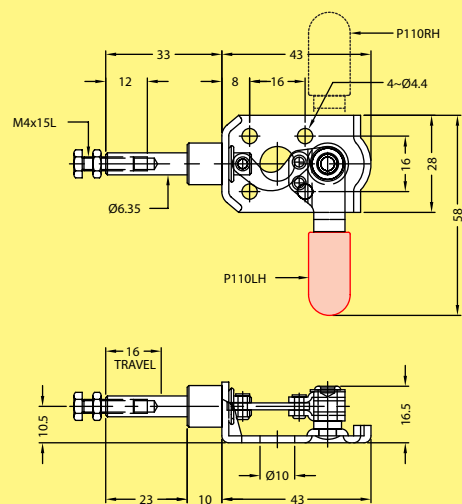


unit : mm

Model : P120

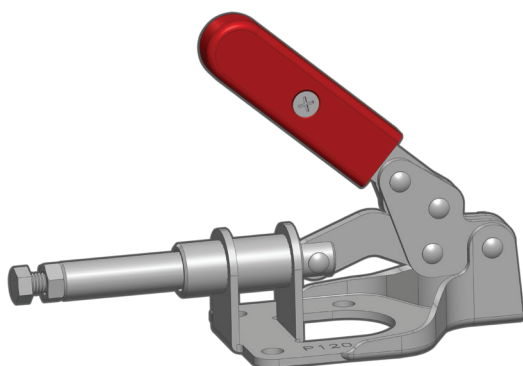


Holding Capacity : 220kg MAX
Weight : 500g

Handle Moves ... 180°
Travel ... 43mm

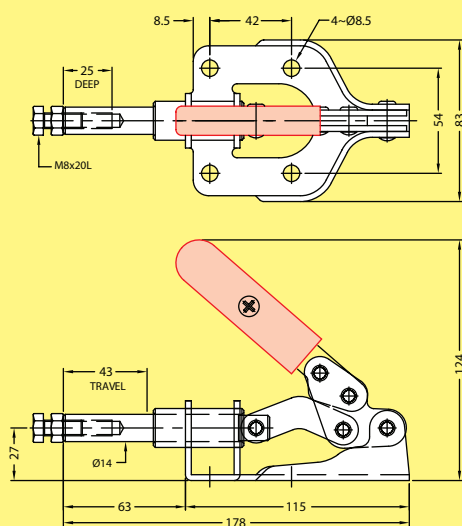


unit : mm

Model : P600

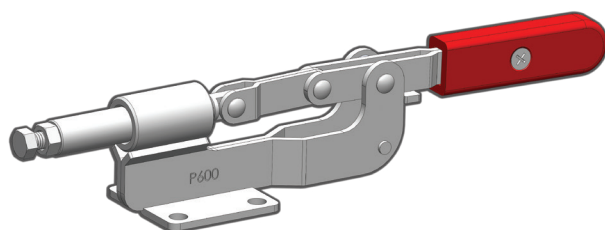

Holding Capacity : 300 kg MAX
Weight : 674g

Handle Moves ... 76°
Travel ... 30mm

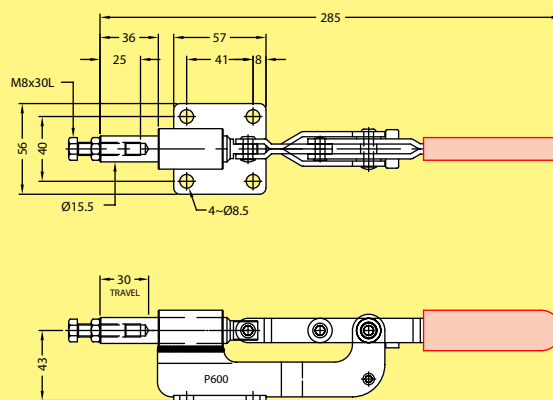


unit : mm




**PUSH / PULL
TYPE**
• TOGGLE CLAMP •

Model : P710




Holding Capacity : 350kg MAX
Weight : 670g

Handle Moves ... 50°
Travel ... 90mm

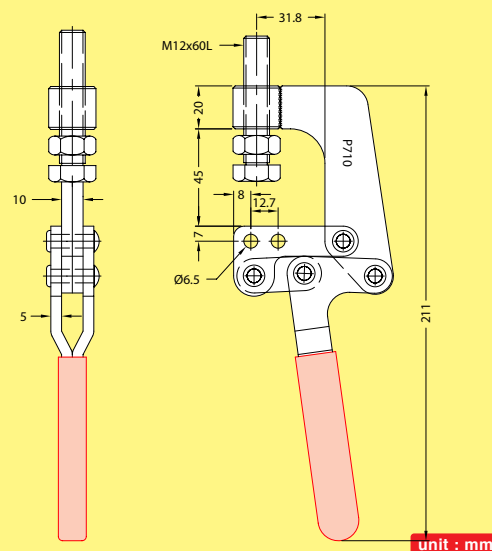


Model : P720

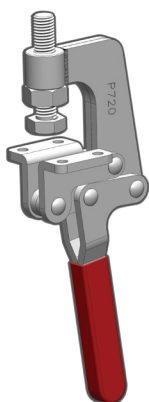


Holding Capacity : 350kg MAX
Weight : 725g

Handle Moves ... 50°
Travel ... 90mm

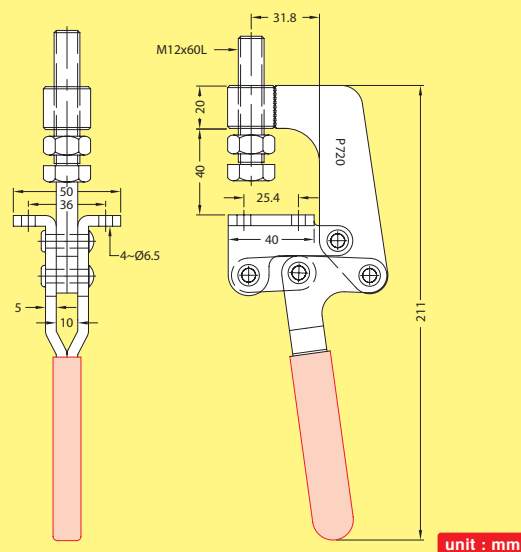


Model : P630

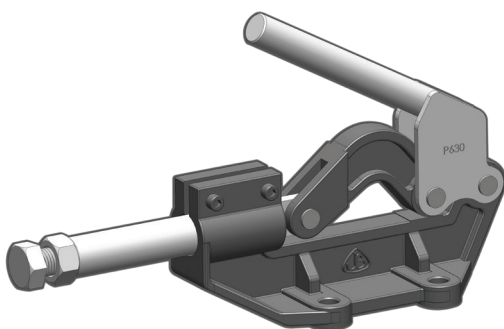

Holding Capacity : 1600 kg MAX
Weight : 4690g

Handle Moves ... 180°
Travel ... 76mm


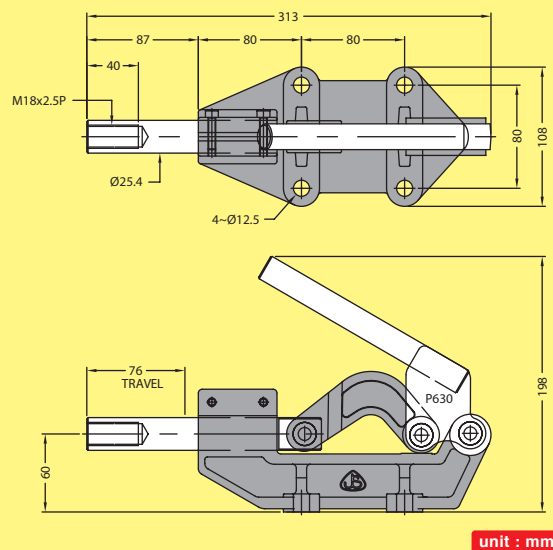


**PUSH / PULL
TYPE**
• TOGGLE CLAMP •



JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : P116

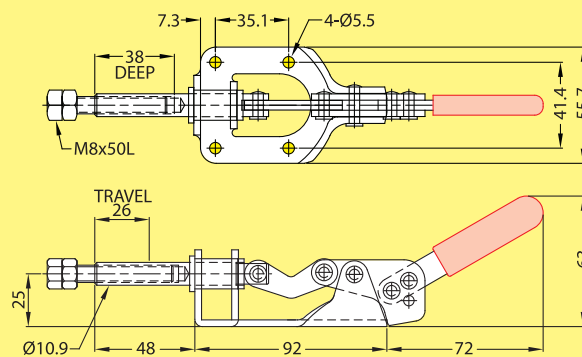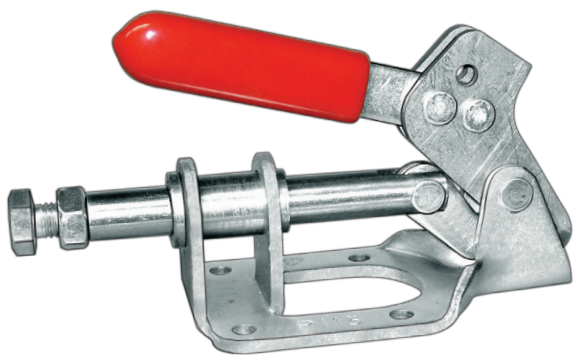


Holding Capacity : 136kg MAX
Weight : 323g

Handle Moves ... 135°
Travel ... 26mm

unit : mm

Usage

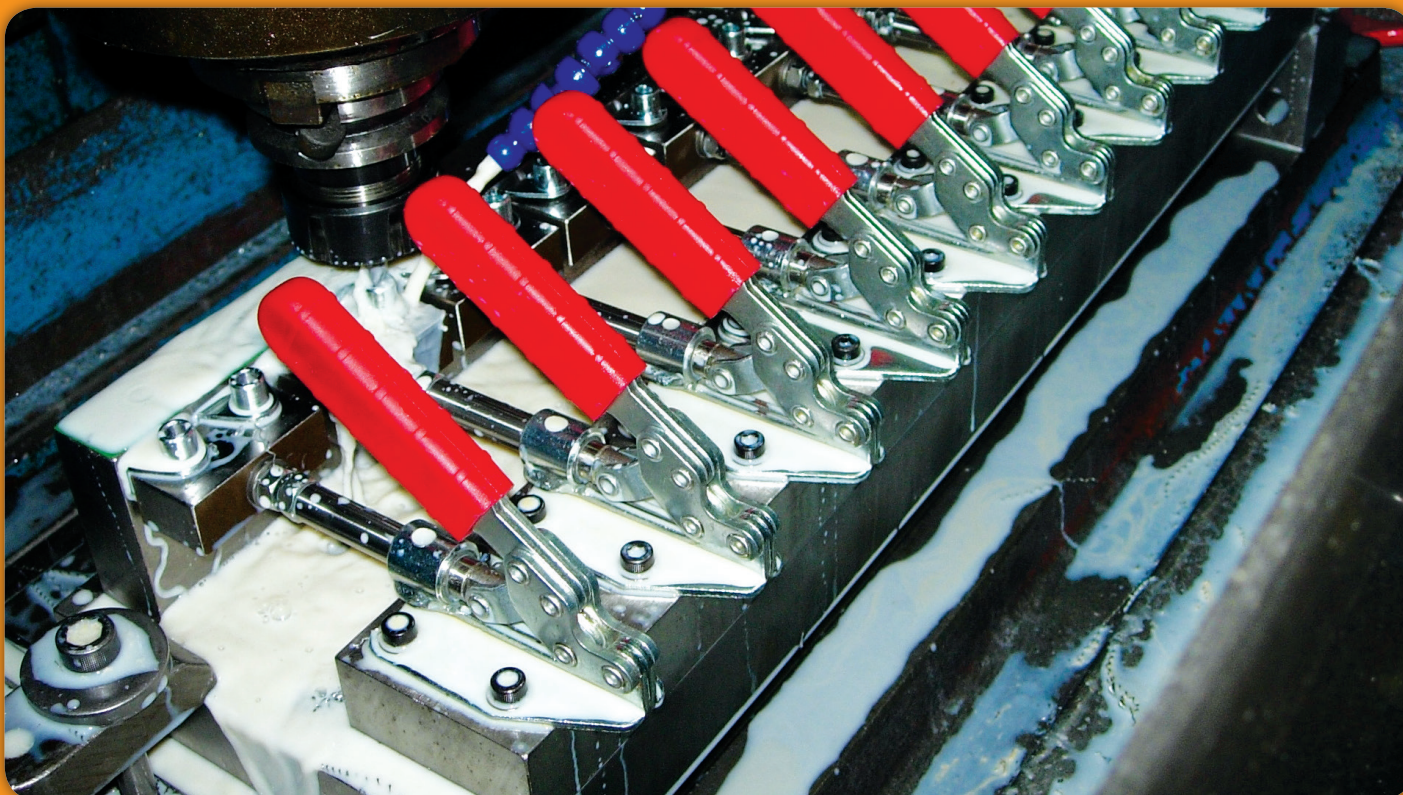




**LATCH TYPE
• TOGGLE CLAMP •**


Model : L130

*Also available in Stainless Steel
Model : L130SS

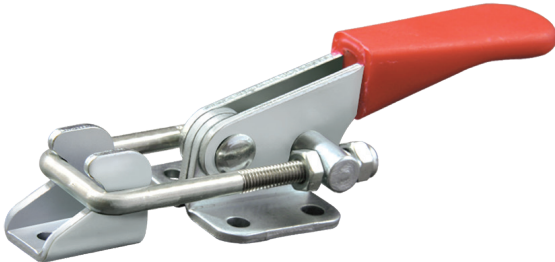

Holding Capacity : 164kg MAX

Weight : 81g

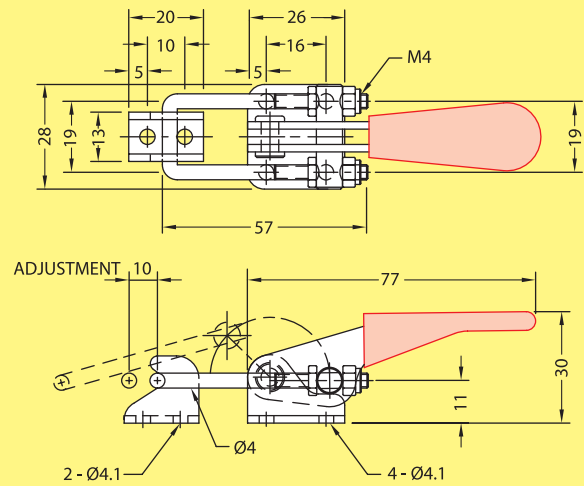

unit : mm


Model : L1305

*Also available in Stainless Steel
Model : L1305SS



Holding Capacity : 225kg MAX


Weight : 96g

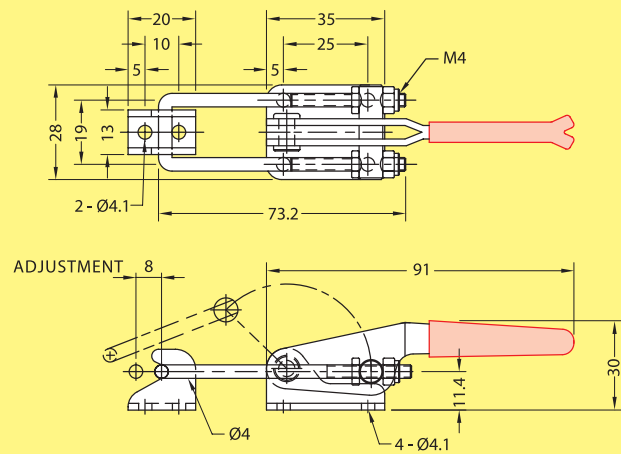

unit : mm


Model : L131

*Also available in Stainless Steel
Model : L131SS

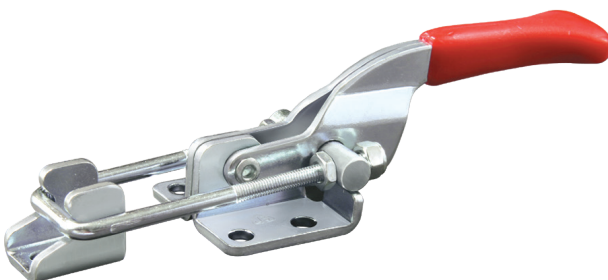

Holding Capacity : 318kg MAX

Weight : 234g

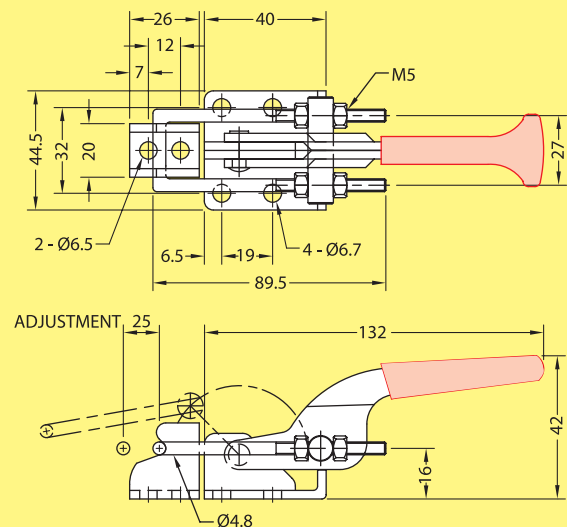

unit : mm

LATCH TYPE • TOGGLE CLAMP •

JSCLAMP
HIGH QUALITY TOGGLE CLAMP


Model : L1315

*Also available in Stainless Steel
Model : L1315SS



Holding Capacity : 470kg MAX

Weight : 328g

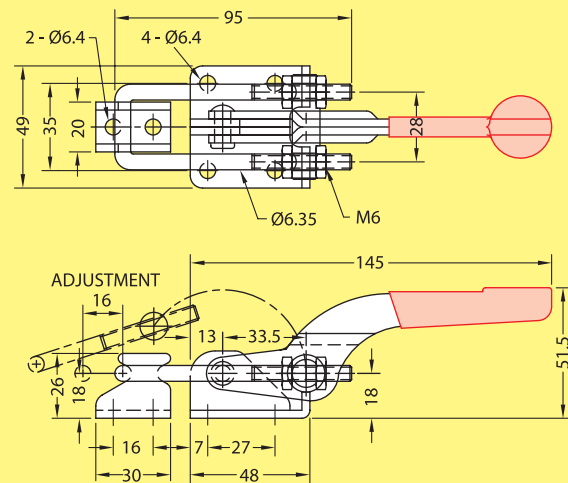

unit : mm


Model : L132

*Also available in Stainless Steel
Model : L132SS



Holding Capacity : 900kg MAX

Weight : 634g

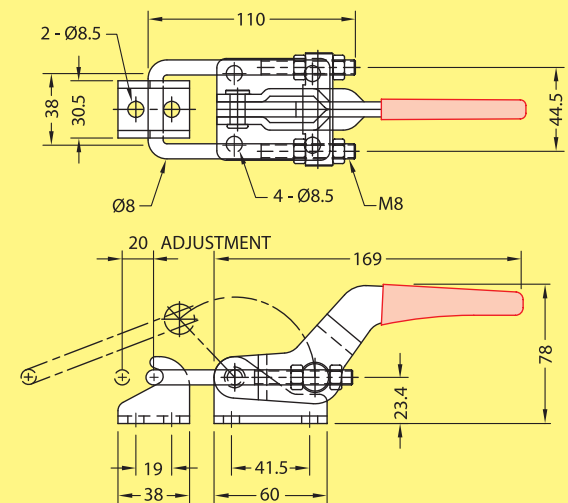


unit : mm

Model : L133



Holding Capacity : 260kg MAX

Weight : 337g

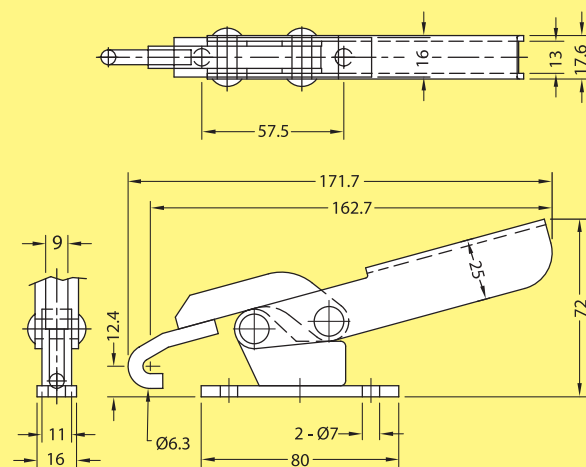

unit : mm




**LATCH TYPE
• TOGGLE CLAMP •**

Model : L134



Holding Capacity : 180kg MAX

Weight : 372g

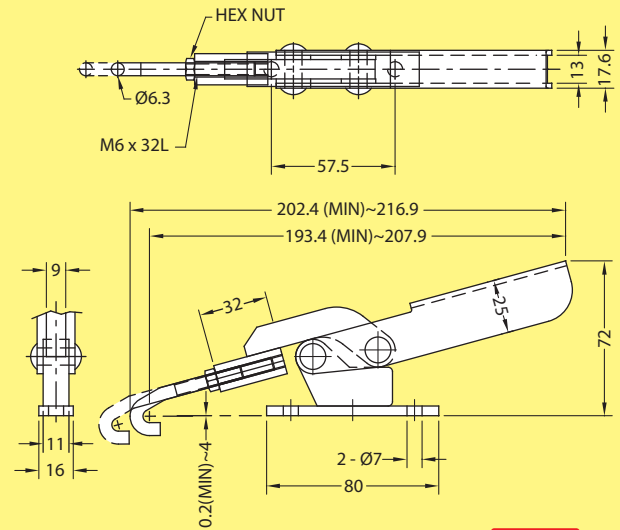

unit : mm


Model : L352

*Also available in Stainless Steel
Model : L352SS



Holding Capacity : 170kg MAX

Weight : 254g

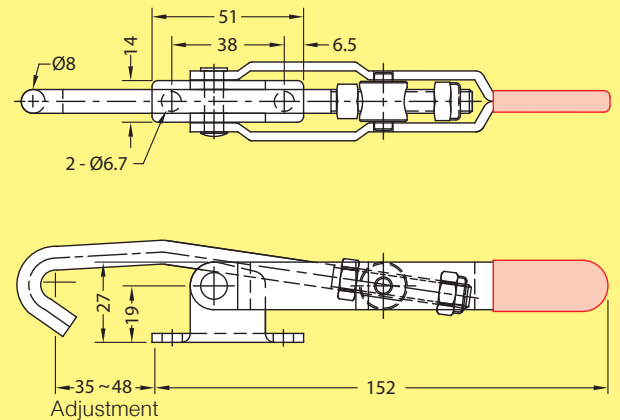

unit : mm


Model : L354

*Also available in Stainless Steel
Model : L354SS



Holding Capacity : 170kg MAX

Weight : 262g

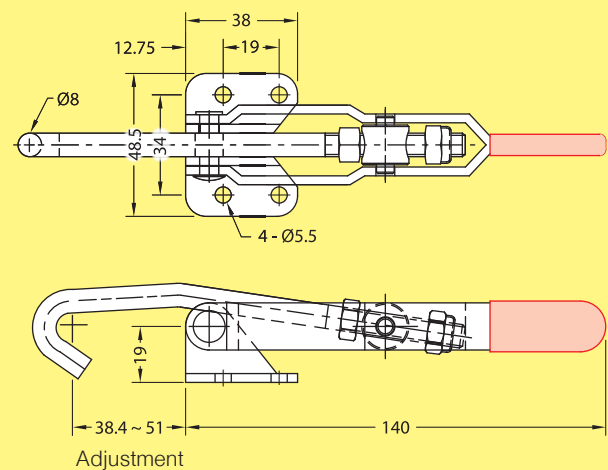

unit : mm


LATCH TYPE • TOGGLE CLAMP •

JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : L138

*Also available in Stainless Steel

Model : L138SS

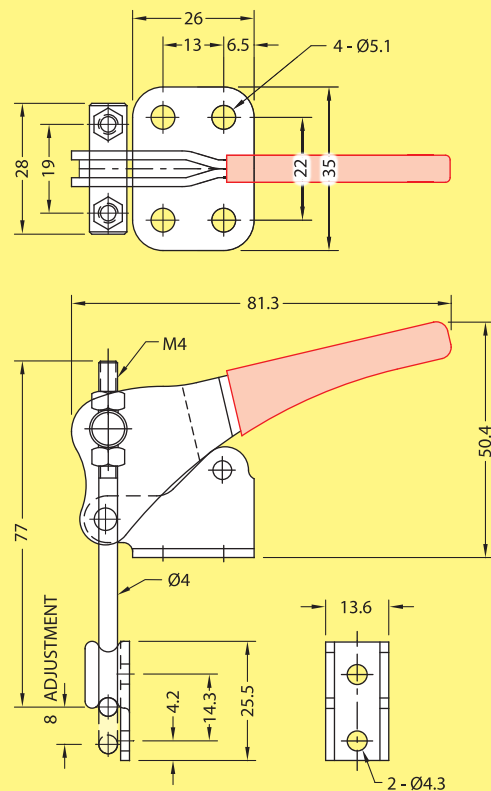

unit : mm


Holding Capacity : 225kg MAX

Weight : 100g

Model : L148

*Also available in Stainless Steel

Model : L148SS

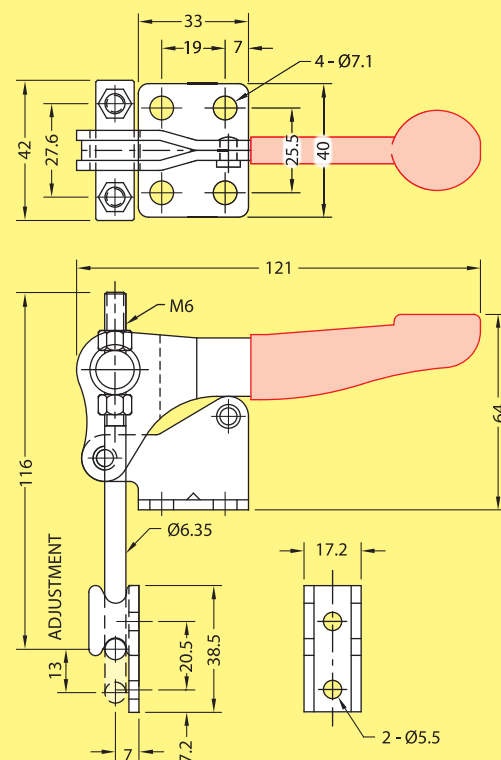

unit : mm

Holding Capacity : 450kg MAX


Weight : 315g



LATCH TYPE
• TOGGLE CLAMP •

Model : L158

*Also available in Stainless Steel
Model : L158SS

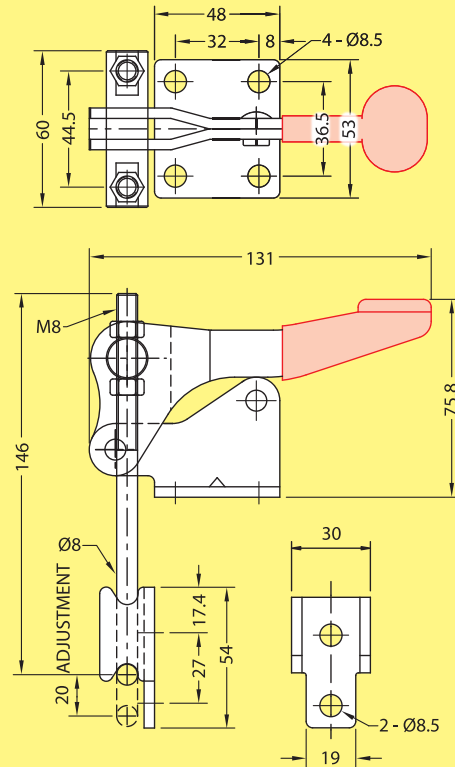

unit : mm


Holding Capacity : 900kg MAX

Weight : 700g

Usage



Usage

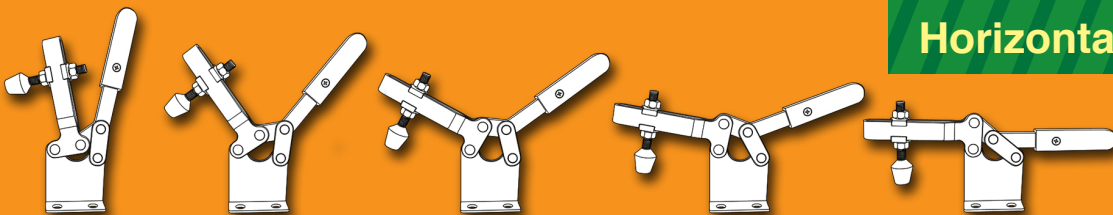


Horizontal Handle

LATCH TYPE
• TOGGLE CLAMP •

JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : L350

*Also available in Stainless Steel
Model : L350SS

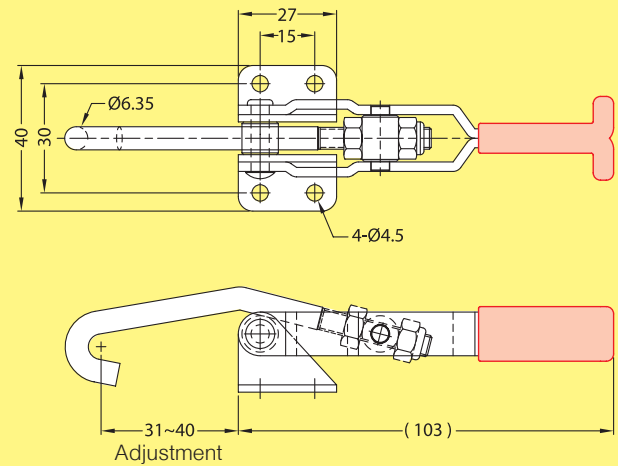


unit : mm

Holding Capacity : 130kg MAX

Weight : 120g

Model : L356

*Also available in Stainless Steel
Model : L356SS

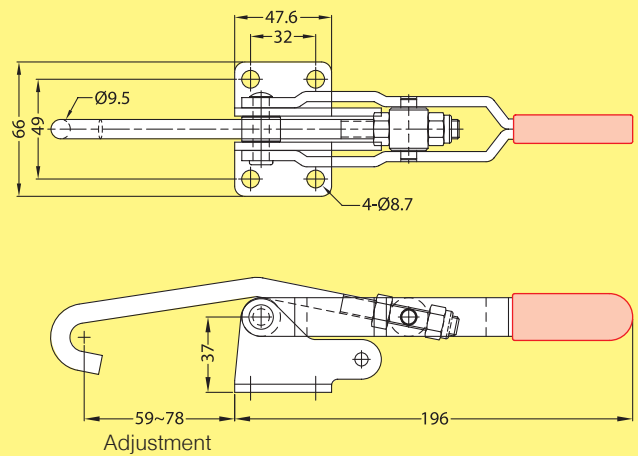

unit : mm


Holding Capacity : 340kg MAX

Weight : 690g




LATCH TYPE
• TOGGLE CLAMP •

Model : L135

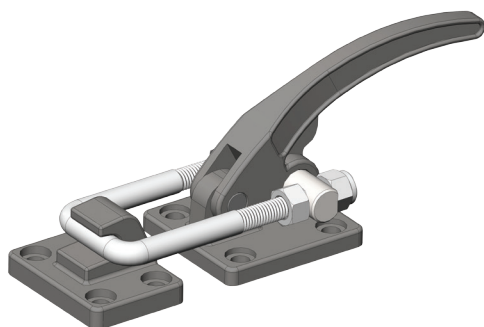

Holding Capacity : 3400kg MAX

Weight : 1955g

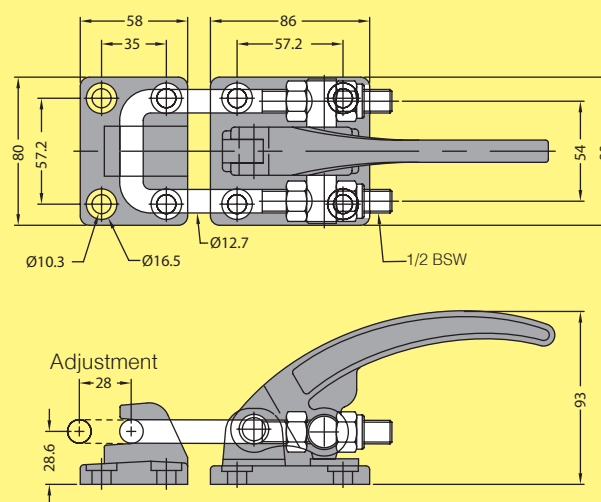


unit : mm

Model : L360


*Also available in Stainless Steel

Model : L360SS

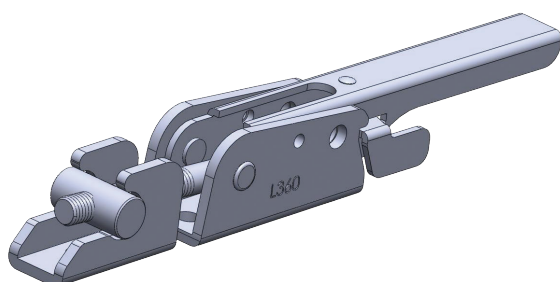

Holding Capacity : 1700kg MAX

Weight : 558g

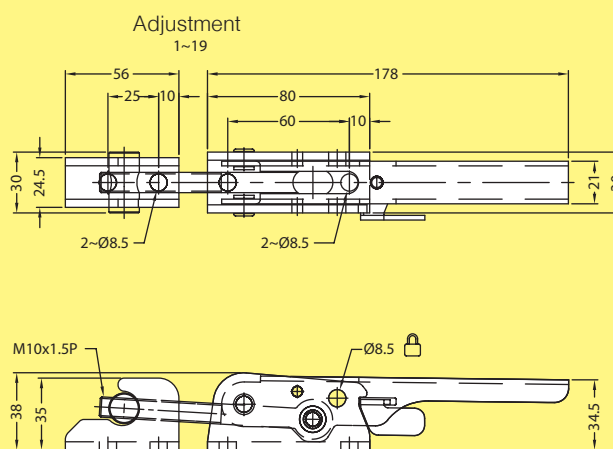


unit : mm

Model : L365


*Also available in Stainless Steel

Model : L365SS

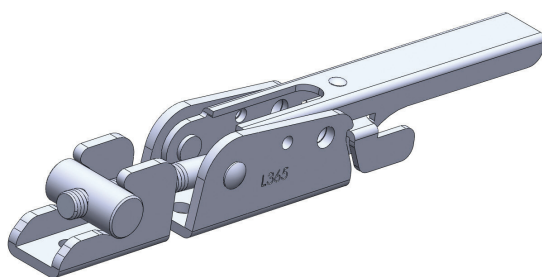

Holding Capacity : 900kg MAX

Weight : 258g

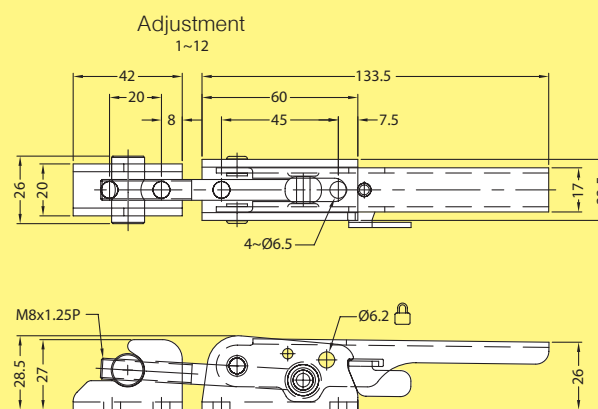



unit : mm

LATCH TYPE
• TOGGLE CLAMP •



JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : L137

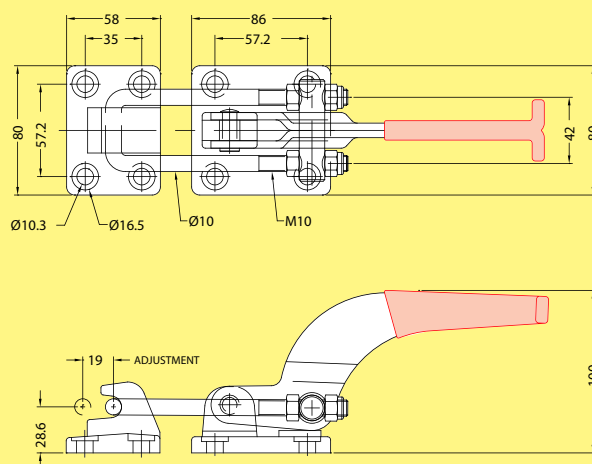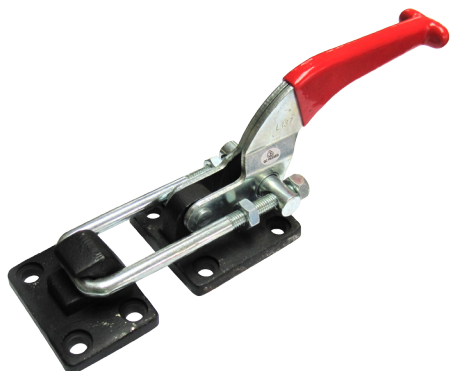

Holding Capacity : 1800kg MAX

Weight : 1775g

unit : mm






**HEAVY DUTY
WELDABLE
• TOGGLE CLAMP •**

Model : AR801, AR802, AR803



Model	Handle Moves	Bar Moves
AR801	116°	187°
AR802	120°	190°
AR803	120°	190°

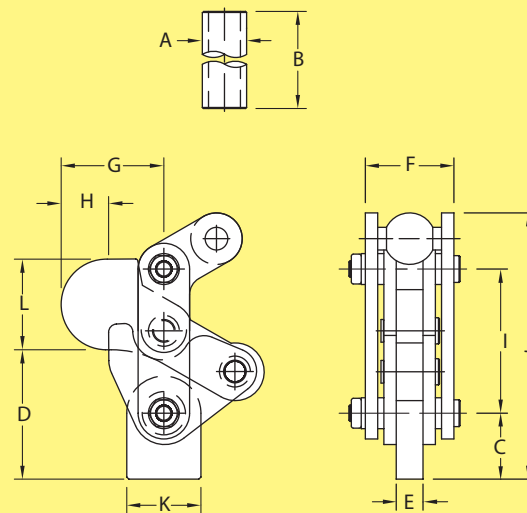

unit : mm

Model	Holding Capacity	A	B	C	D	E	F	G	H	I	J	K	L	Weight
AR801	200kg	Ø13.5	122	23.5	45	8	33	40	17	50	95	26	30	604g
AR802	500kg	Ø21.5	140	32	64	13	45	48	23	70	130	36	44	1455g
AR803	1000kg	Ø21.5	140	36	82	16	57	57	23	92	165	50	55	2820g

Model : AR801SB

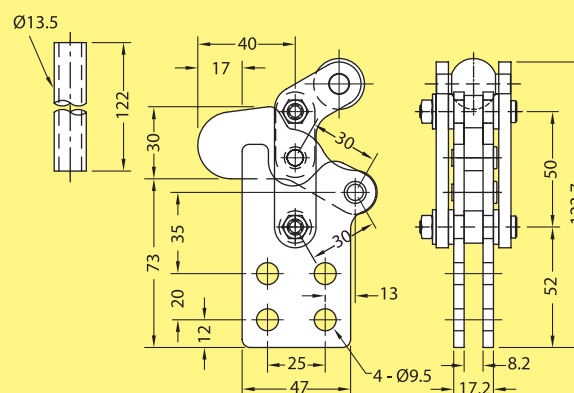



unit : mm

Holding Capacity : 200kg MAX
Weight : 683g

Handle Moves ... 116°
Bar Moves ... 187°

Model : AR802SB

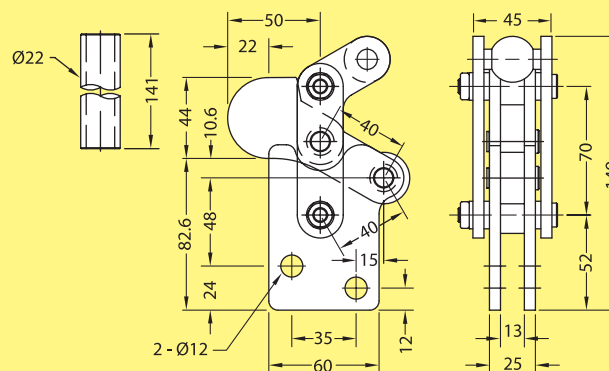

unit : mm

Holding Capacity : 500kg MAX
Weight : 1542g

Handle Moves ... 120°
Bar Moves ... 190°




Model : V120RA



Holding Capacity : 91kg MAX
Weight : 623g

Handle Moves ... 60°
Bar Moves ... 100°

MAX AIR PRESSURE : 9.9kgf / cm²

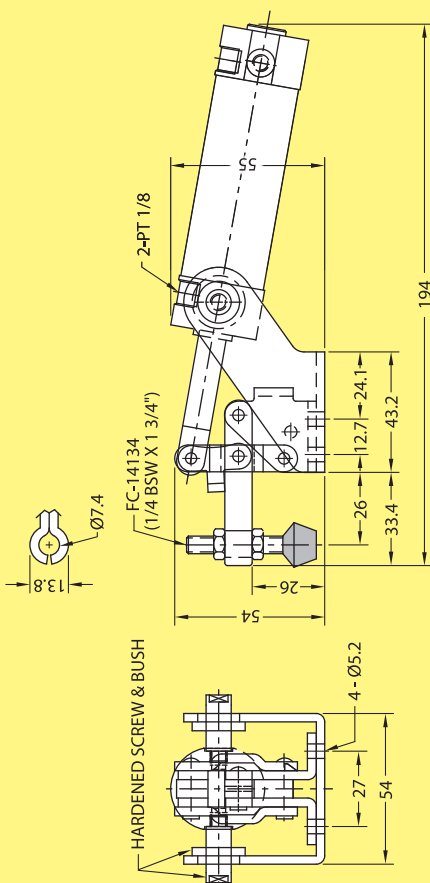

unit : mm


Model : V130A



Holding Capacity : 227kg MAX
Weight : 787g

Handle Moves ... 60°
Bar Moves ... 100°

MAX AIR PRESSURE : 9.9kgf / cm²

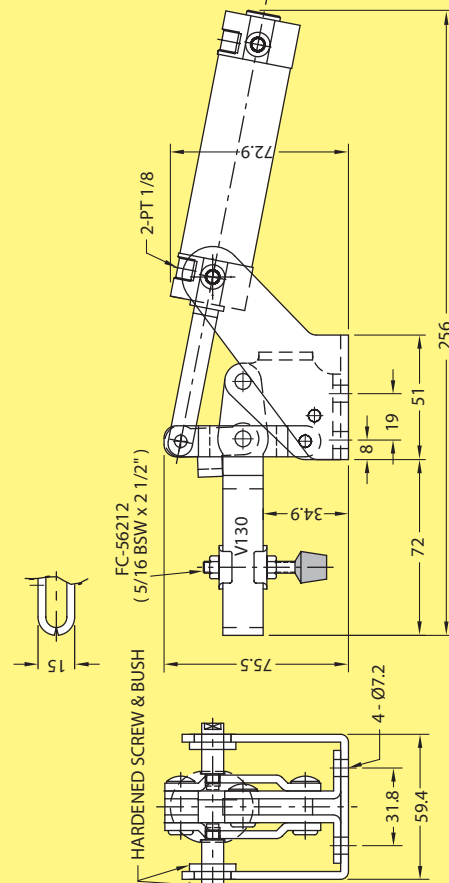


unit : mm



AIR POWER
• TOGGLE CLAMP •


Model : V210A

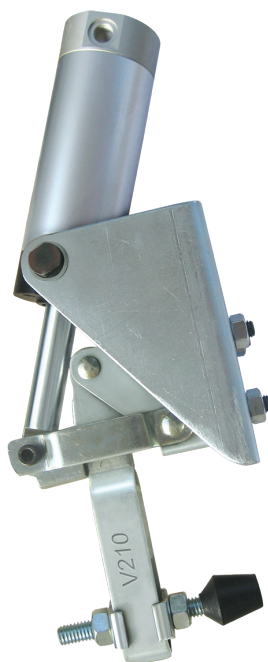

Holding Capacity : 340kg MAX
Weight : 1765g


Handle Moves ... 58°
Bar Moves ... 105°

MAX AIR PRESSURE : 9.9kgf / cm²

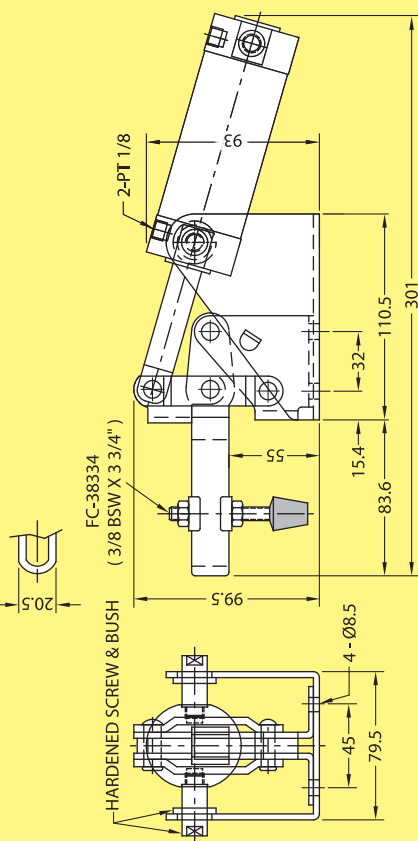

unit : mm


Model : V247UA

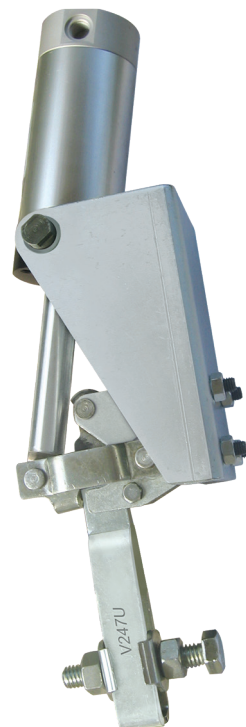

Holding Capacity : 450kg MAX
Weight : 3280g

Handle Moves ... 58°
Bar Moves ... 100°

MAX AIR PRESSURE : 9.9kgf / cm²

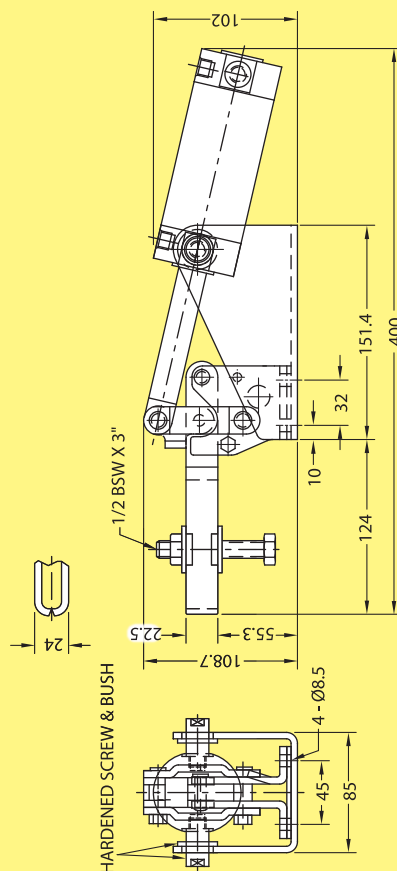


unit : mm



AIR POWER
• TOGGLE CLAMP •


Model : P330A

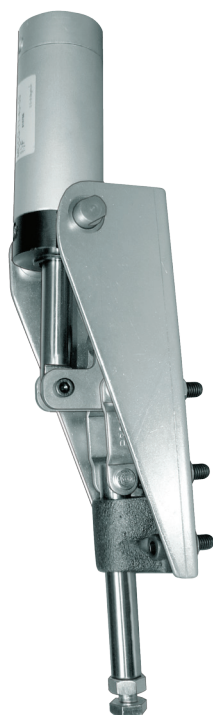

Holding Capacity : 952kg MAX
Weight : 2312g


Handle Moves ... 90°
Travel ... 32mm

MAX AIR PRESSURE : 9.9kgf / cm²

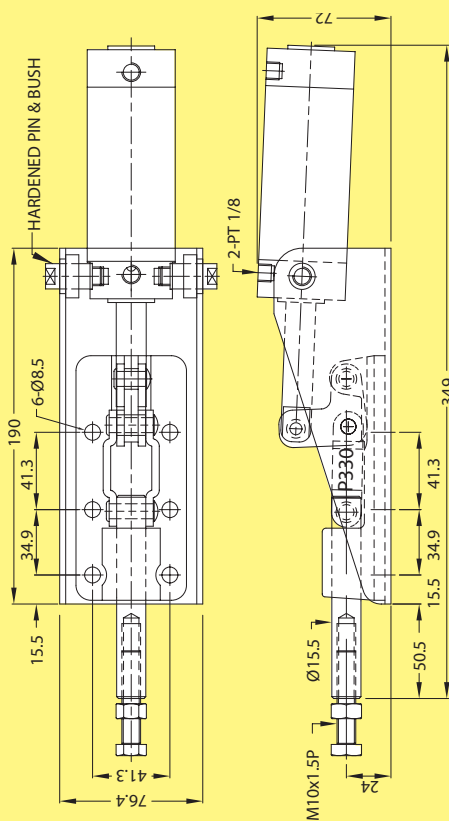

unit : mm

Usage

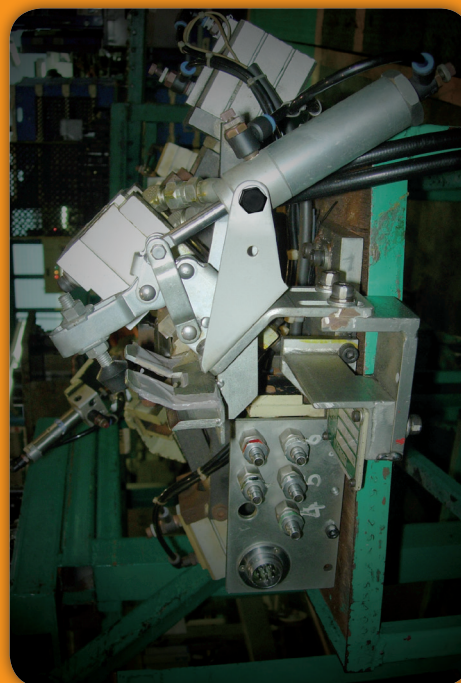

Usage






AIR POWER
• TOGGLE CLAMP •

pg 6 - 4


Model : H228FA

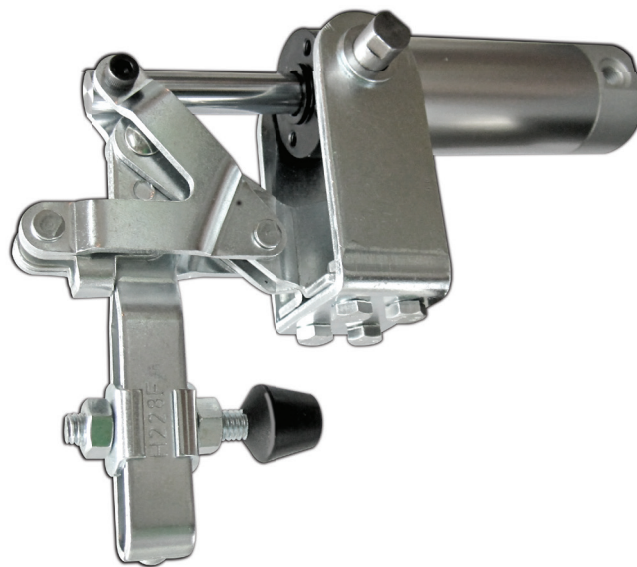

Holding Capacity : 100kg MAX
Weight : 930g

Handle Moves ... 51°
Arm Moves ... 90°

MAX AIR PRESSURE : 9.9kgf / cm²

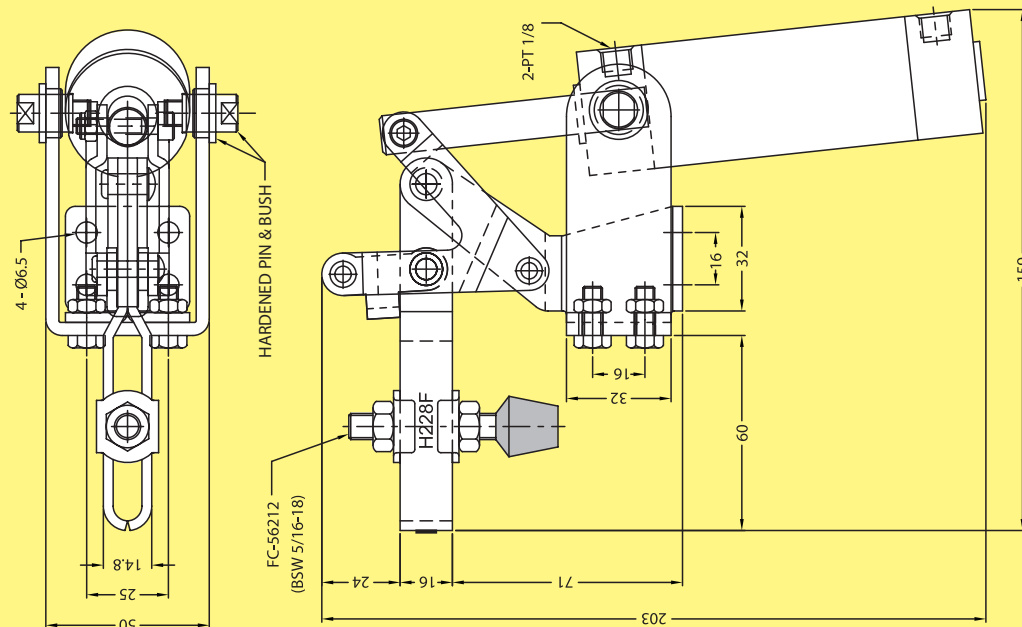


unit : mm

**POWER SCREEN
TENSIONER &
ACCESSORIES**
• TOGGLE CLAMP •



Model : PST4050


Power Screen Tensioner

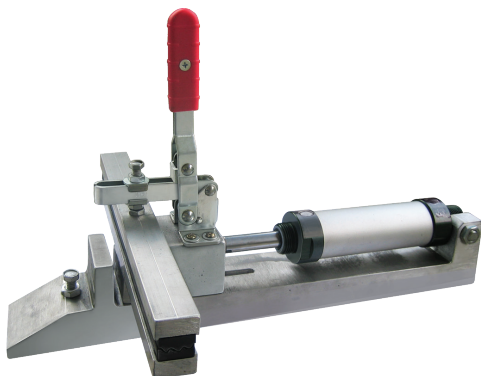

Screen Pinching Width	300mm
Air Pressure Supply	4 to 9kg / cm ²
Cylinder Bore	40mm
Tension Stroke	50mm
Dimension (mm)	300(W) x 475(L) x 280(H)
Weight	3.9kg

Rubber Cushion Spindle


(Complete with 2 Hexagon Nuts)



unit : mm

Part No.	Size	L	Weight
FC-042707	M4 x 0.7	27mm	4g
FC-044007	M4 x 0.7	40 mm	6g
FC-053508	M5 x 0.8	35 mm	8.5g
FC-084312	M8 x 1.25	43 mm	28.2g
FC-12400	BSW 1/2 - 12	4"	148g
FC-14134	BSW 1/4 - 20	1 3/4"	18.2g
FC-14200	BSW 1/4 - 20	2"	19.2g
FC-38334	BSW 3/8 - 16	3 3/4"	65g
FC-38412	BSW 3/8 - 16	4 1/2"	73g
FC-56212	BSW 5/16 - 18	2 1/2"	35g
FC-56300	BSW 5/16 - 18	3"	35.8g


Flanged Washer



unit : mm

Part No.	ØD x K x W	To Suit Toggle Clamp	W
FW-043084	4.3 x 3.7 x 8.4	H225	1.2g
FW-051090	5.1 x 3.5 x 9	V105, H301, V150, V209, V209B, H430, H430B, H209, H209B	1.7g
FW-064100	6.4 x 4.7 x 10	H313	1.9g
FW-064120	6.4 x 4 x 12	V108, V108F, H235, H235B, H238, H440, H440B	2.2g
FW-064138	6.4 x 4 x 13.8	V120, V120B	2.4g
FW-065150	6.5 x 6.5 x 15	H380, H380B, V141, V141B, V125	6.4g
FW-085150	8.5 x 6.5 x 15	V101, V110L, V110L1, V130, V130B, V130L, V130BL, V142, V142B, V160, H230, H230L, H230F, H230FL, H245, H245B, H450, H450B, H228F, H228FA, V130A	5.8g
FW-085207	8.5 x 6.5 x 20.7	H381, H381B, H381H	10g
FW-105215	10.5 x 7.5 x 21.5	V210, V210B, V170, H300, H300L, H300H, H300HL, H330, H460, H460B, H330L, H381H, H384, H384B, H520L, H550L, V210A	10g
FW-130245	13 x 7.5 x 24.5	V247U, V247UB, V310, V247UA	19.5g

Swivel Foot Spindle

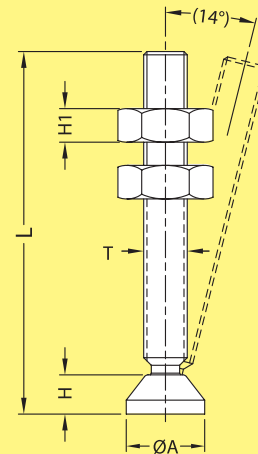


unit : mm

Part No.	L	ØA	H	H1	T	Weight
SF-M0606510RB12	65	12	6.2	5	M6 x 1.0P	19g
SF-M0807512RB15	75	15	7.5	6.2	M8 x 1.25P	37g
SF-M1009515RB18	95	18	9.0	7.7	M10 x 1.5P	74g
SF-M1210017RB20	100	20	10.5	9.8	M12 x 1.75P	109g
SF-M1612020RB28	120	28	13.0	12.2	M16 x 2.0P	238g

Part No.	L	ØA	H	H1	T	Weight
SF-B140212RB12	63	12	6.2	5	1/4 BSW	21g
SF-B516300RB15	76	15	7.5	6.2	5/16 BSW	36g
SF-B380334RB18	95	18	9.0	7.7	3/8 BSW	62g
SF-B120400RB20	100	20	10.5	11	1/2 BSW	126g
SF-B580434RB28	120	28	13.0	13.6	5/8 BSW	235g

Usage

• Swivel Foot Spindle •

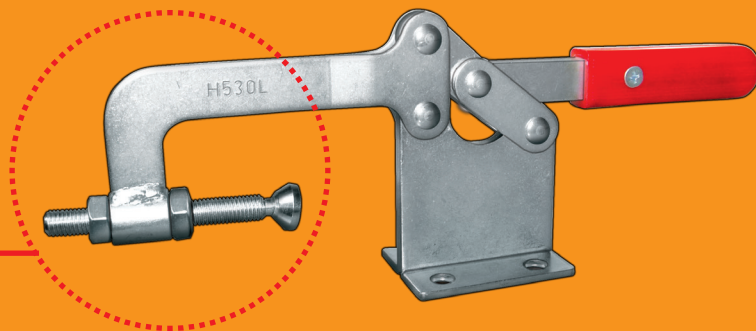

Horizontal Handle
– Toggle Clamp –

SQUEEZE ACTION

• TOGGLE CLAMP •



JSCLAMP


HIGH QUALITY TOGGLE CLAMP

Model : SC2050



Holding Capacity : 150kg MAX
Weight : 238g

Jaw Opening : 0 - 49 mm

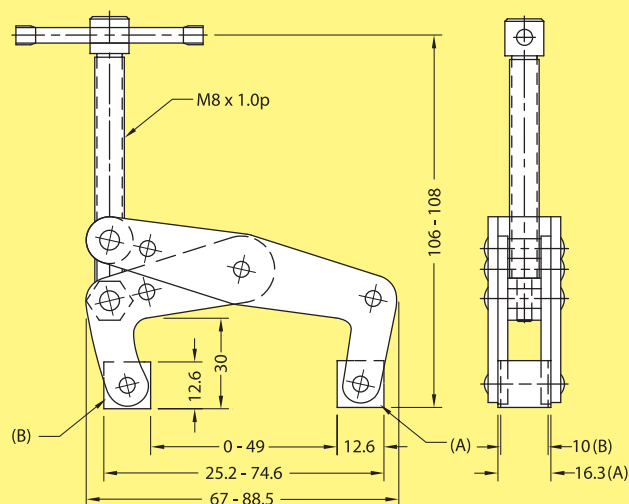


unit : mm

Model : SC3075



Holding Capacity : 300kg MAX
Weight : 660g

Jaw Opening : 0 - 79 mm

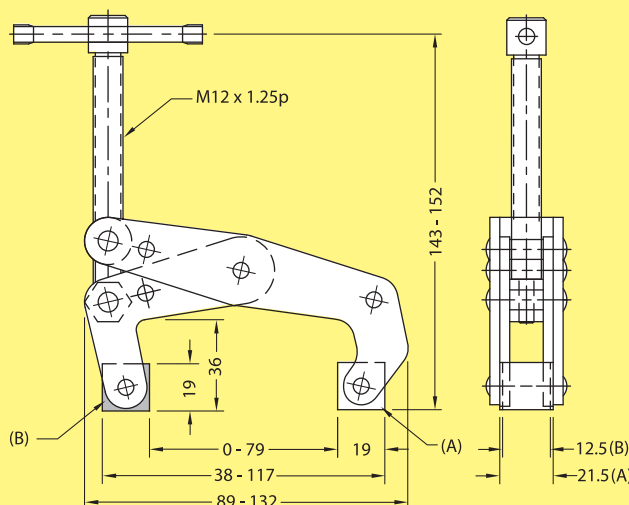

unit : mm

Usage




Usage





LIFTING CLAMP
• TOGGLE CLAMP •

Horizontal Lifting Clamp

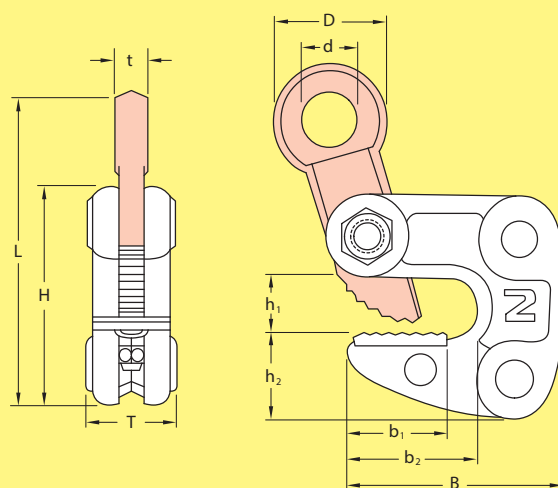


unit : mm

Model	Capacity (tons)	Clamping range (mm)	L	t	T	H	h1	h2	B	b1	b2	D	d	Weight (kg)
1. HLC-1	1	1 ~ 13	173	14	32	104	23.5	39.5	105	66	44	72	46	1.6
2. HLC-2	2	3 ~ 22	233	18	42	130	36	50	137	87	58	96	61	3.9
3. HLC-3	3	12 ~ 35	261	23	52	177	42	67.5	173.5	107	68	80	35	9

Vertical Lifting Clamp (E-type)

* Auto Lock / without Special Lock




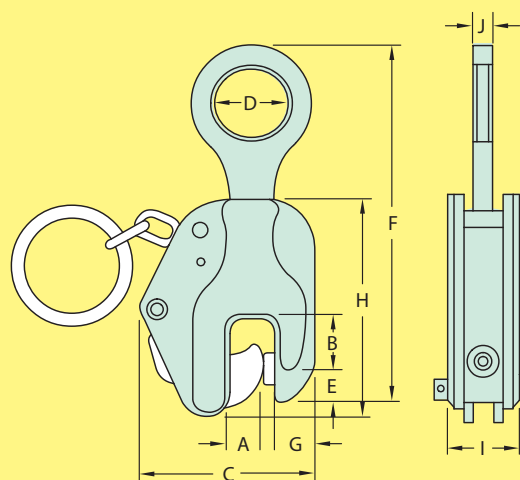


unit : mm

Model	Lifting Cap (tons)	Clamping range (mm)	Jay Opening (mm)	A	B	C	D	E	F	G	H	I	J	Weight (kg)
1. E-0001	1	2	0 - 22	24	36	125	50	24	220-260	30	156	52	14	3.6
2. E-0002	2	4	0 - 30	35	45	155	60	30	250-295	38	190	60	18	6.0
3. E-0003	3	6	0 - 35	40	50	175	60	35	296-360	40	226	68	20	9.2
4. E-0005	5	10	0 - 50	50	58	218	65	45	350-420	60	270	76	22	16.5

Applications

- At building construction field
- At subway construction (civil engineering construction) sites



MOULD CLAMP • TOGGLE CLAMP •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Mould Clamp : Heel Type



Heel Type

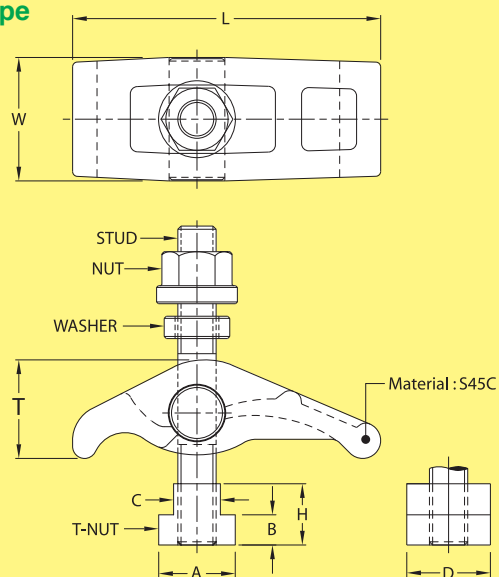


*Custom Size To Meet Your Requirement unit : mm

Model No.	T	W	L	*A	*B	*C	*D	*H	STUD	WEIGHT
MCH01	43	54	130	28	10	18	30	20	M16 x 150L	1.5kg
MCH02	52	60	152	36	14	22	40	25	M20 x 150L	2.3kg
MCH03	43	54	130	28	10	18	30	20	5/8" x 150L	1.5kg
MCH04	52	60	152	36	14	22	40	25	3/4" x 150L	2.3kg

Mould Clamp : Step Type



Step Type

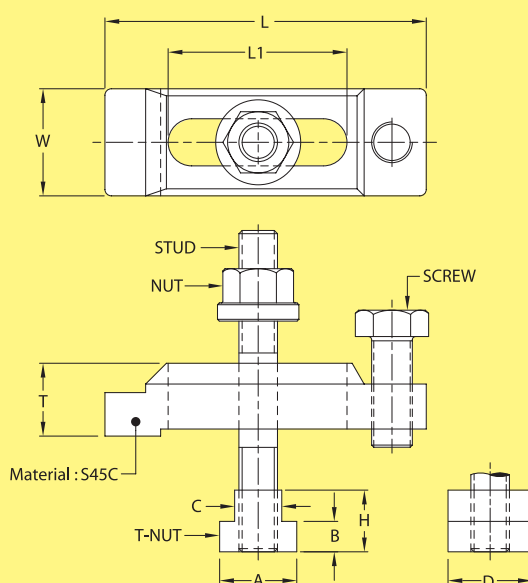

*Custom Size To Meet Your Requirement unit : mm


Model No.	T	W	L	L1	*A	*B	*C	*D	*H	STUD	SCREW	WEIGHT
MCS01	30	43	130	70	28	10	18	30	20	M16 x 150L	M16 x 40L	1.2kg
MCS02	34	50	150	83	36	14	22	40	25	M20 x 150L	M20 x 50L	1.9kg
MCS03	30	43	130	70	28	10	18	30	20	5/8" x 150L	5/8" x 40L	1.2kg
MCS04	34	50	150	83	36	14	22	40	25	3/4" x 150L	3/4" x 50L	1.9kg



**TOGGLE
LINK CLAMP**
• LATCH •


Model : TL01

*Also available in Stainless Steel
Model : TL01SS

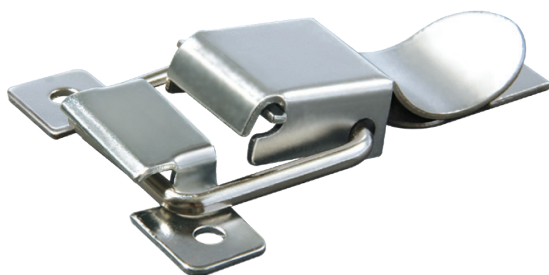

Safe Load : 40kg MAX

Weight : 31g

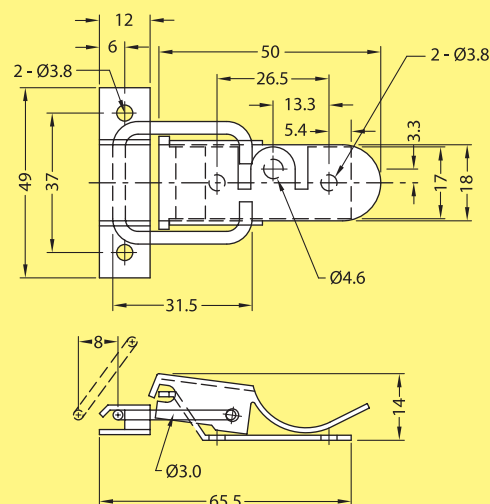


unit : mm

Model : TL02

*Also available in Stainless Steel
Model : TL02SS



Weight : 73g

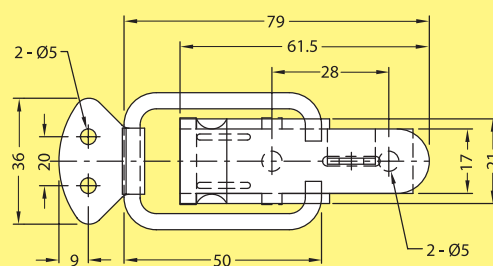

unit : mm


Model : TL02K

*Also available in Stainless Steel
Model : TL02KSS



Safe Load : 150kg MAX

Weight : 76g

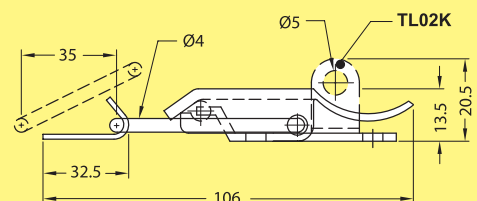


unit : mm

Model : TL03

*Also available in Stainless Steel
Model : TL03SS



Weight : 21g

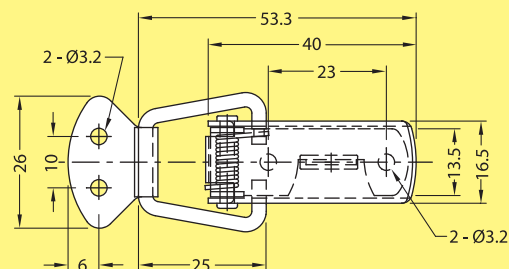

unit : mm


Model : TL03K

*Also available in Stainless Steel
Model : TL03KSS



Safe Load : 110kg MAX

Weight : 21g

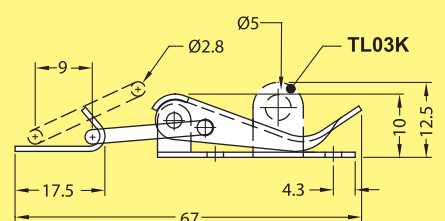

unit : mm

**TOGGLE
LINK CLAMP**
• LATCH •



JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : TL04


*Also available in Stainless Steel
Model : TL04SS



Weight : 41g


Model : TL04K

*Also available in Stainless Steel
Model : TL04KSS

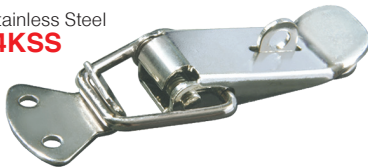

Safe Load : 170kg MAX

Weight : 41g

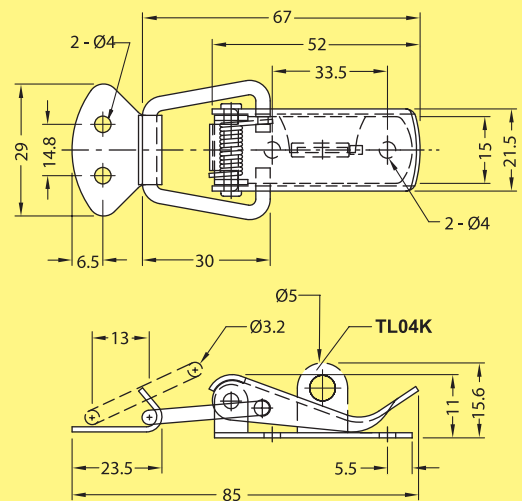

unit : mm


Model : TL05

*Also available in Stainless Steel
Model : TL05SS



Safe Load : 230kg MAX

Weight : 95g

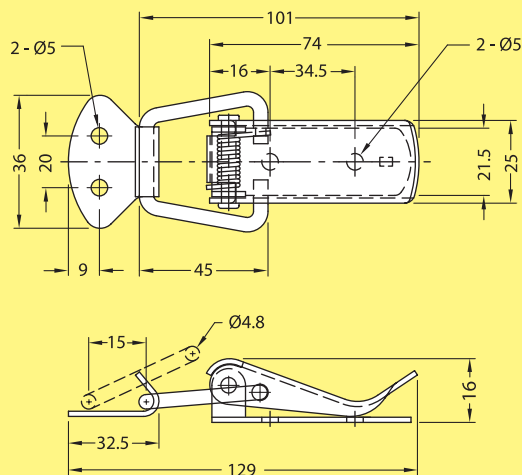


unit : mm

Model : TL06K



Safe Load : 300kg MAX

Weight : 200g

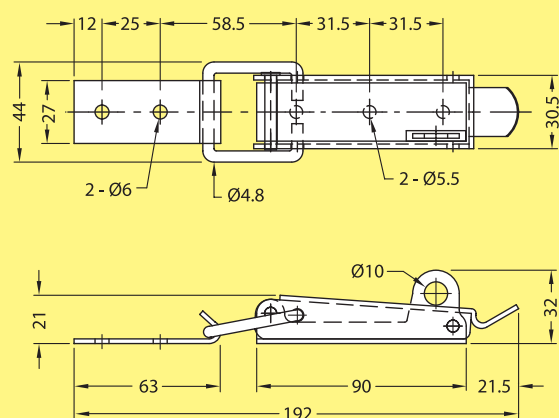


unit : mm



TOGGLE LINK CLAMP • LATCH •


Model : TL116

*Also available in Stainless Steel
Model : TL116SS

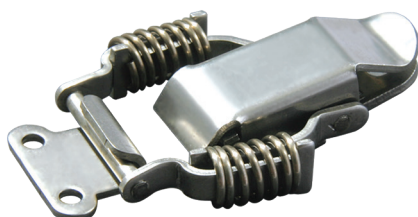

Safe Load : 50kg MAX

Weight : 43g

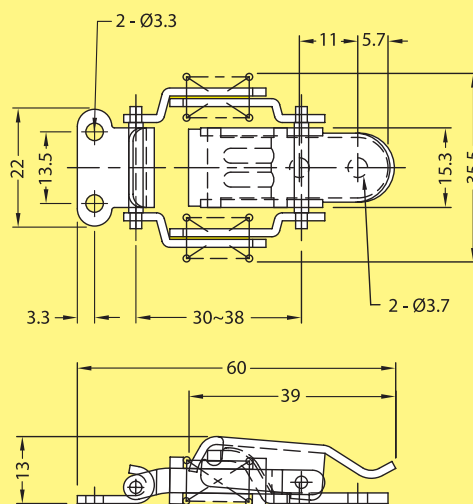


unit : mm

Model : TL124

*Also available in Stainless Steel
Model : TL124SS



Weight : 78g

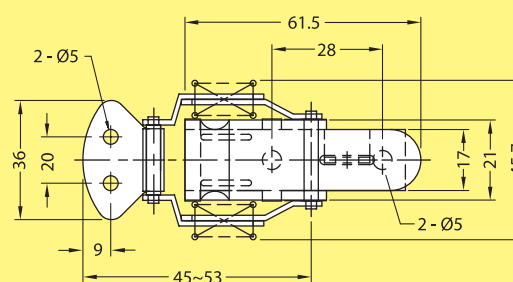

unit : mm


Model : TL124K

*Also available in Stainless Steel
Model : TL124KSS



Safe Load : 80kg MAX

Weight : 81g

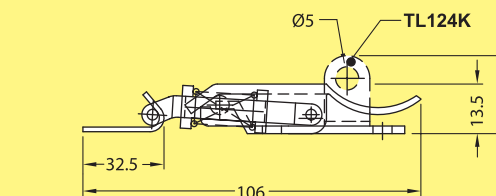

unit : mm


Model : TL118

*Also available in Stainless Steel
Model : TL118SS



Safe Load : 50kg MAX

Weight : 27g

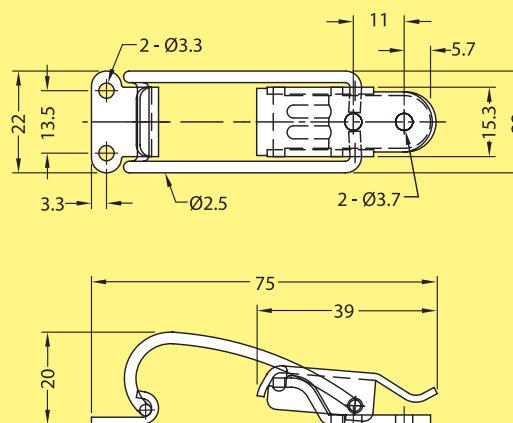

unit : mm

**TOGGLE
LINK CLAMP**
• LATCH •




JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : TL119



Safe Load : 15kg MAX

Weight : 8g

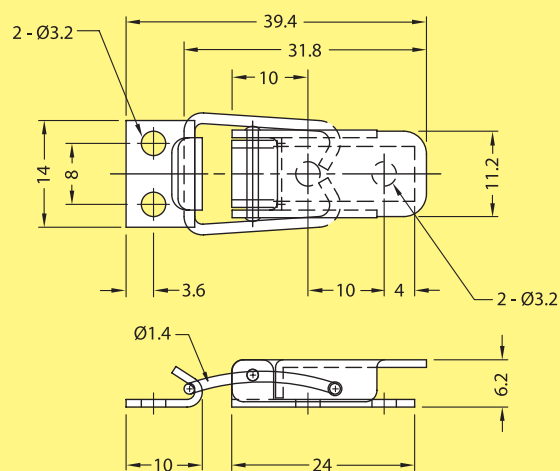


unit : mm

Model : TL121



Safe Load : 15kg MAX

Weight : 6g

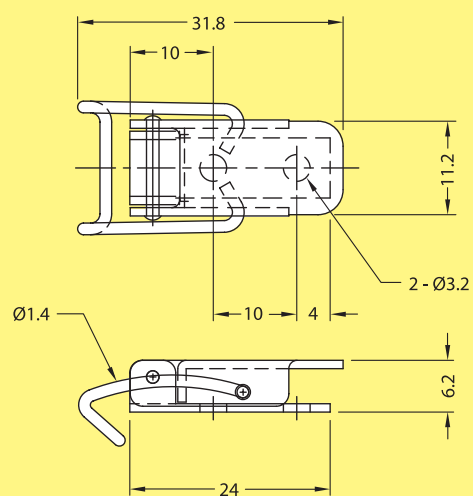

unit : mm


Model : TL135

*Also available in Stainless Steel
Model : TL135SS



Safe Load : 100kg MAX

Weight : 77g

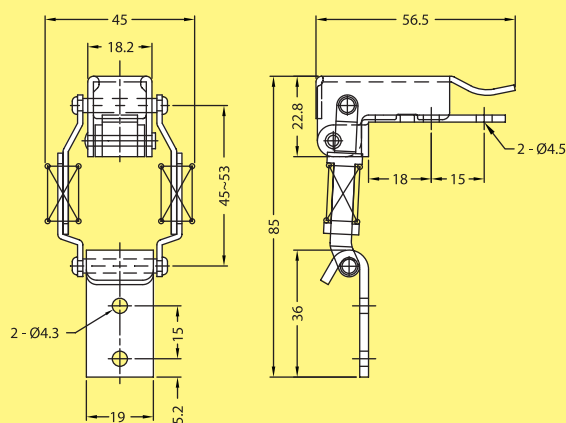

unit : mm



**TOGGLE
LINK CLAMP**
• LATCH •

Model : TL104

*Also available in Stainless Steel

Model : TL104SS



Weight : 23g

Model : TL104K



*Also available in Stainless Steel

Model : TL104KSS



Safe Load : 55kg MAX

Weight : 22g

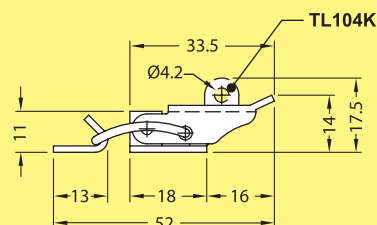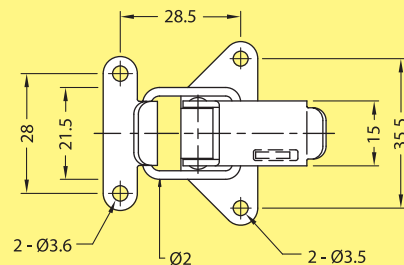

unit : mm

Model : TL122


*Also available in Stainless Steel

Model : TL122SS



Safe Load : 100kg MAX

Weight : 92g

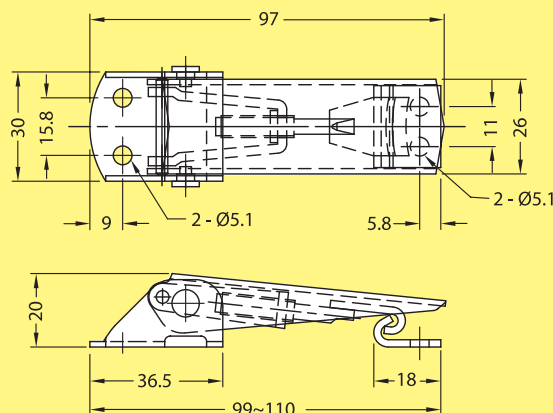


unit : mm

Model : TL107



Safe Load : 100kg MAX

Weight : 63g

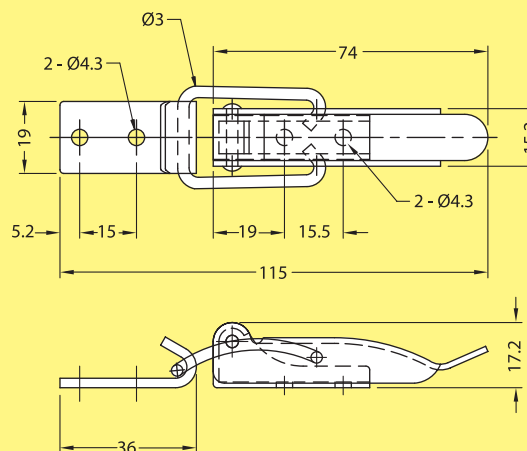


unit : mm

TOGGLE LINK CLAMP • LATCH •



JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : TL127K

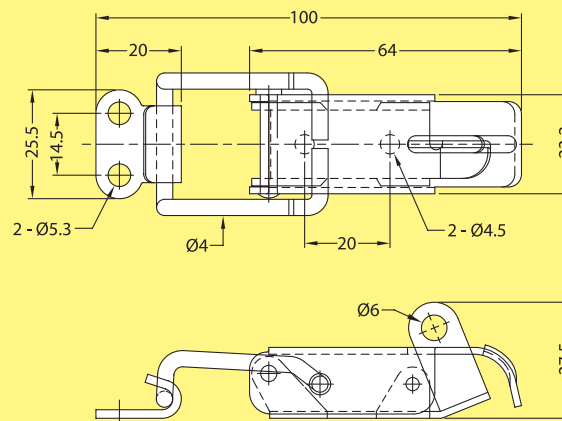



Safe Load : 180kg MAX

Weight : 74g

unit : mm

Model : TL129

*Also available in Stainless Steel
Model : TL129SS

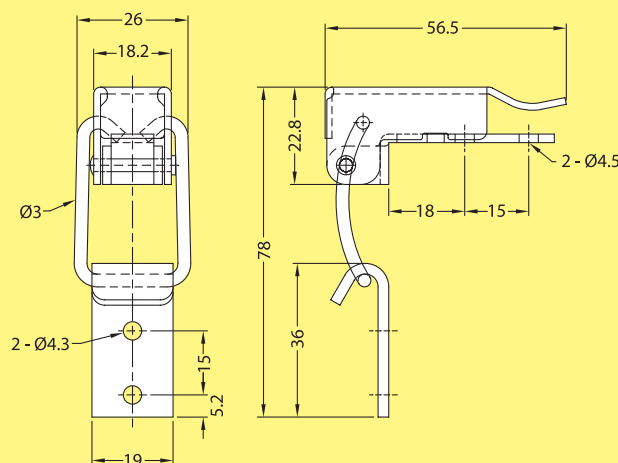
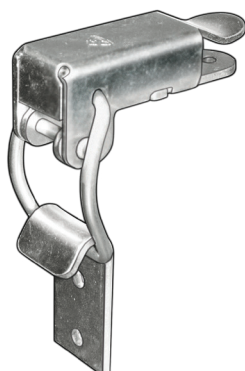


Safe Load : 100kg MAX

Weight : 64g

unit : mm

Model : TL305

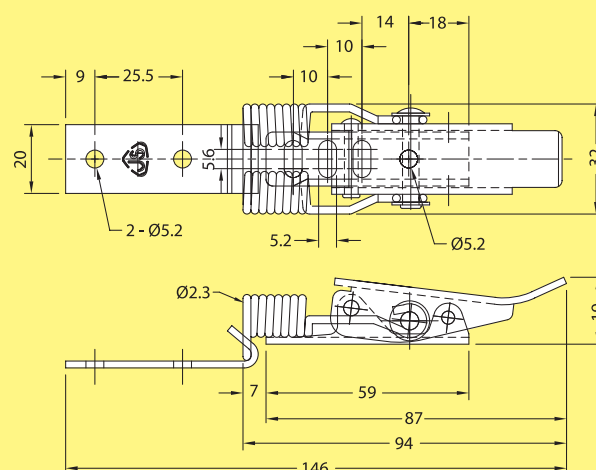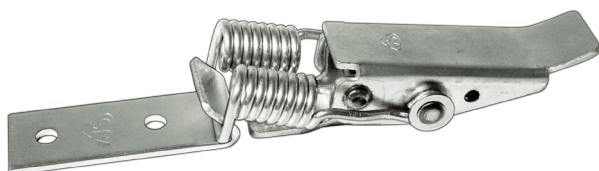

Safe Load : 100kg MAX

Weight : 104g

unit : mm



TOGGLE LINK CLAMP • LATCH •

Model : TL105

*Also available in Stainless Steel

Model : TL105SS



Model : TL105K



*Also available in Stainless Steel

Model : TL105KSS



Safe Load : 50kg MAX

Weight : 22.5gm, 32gm

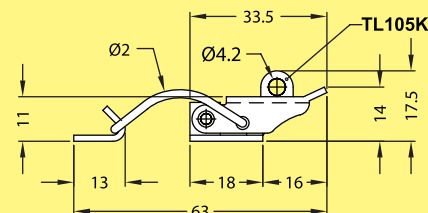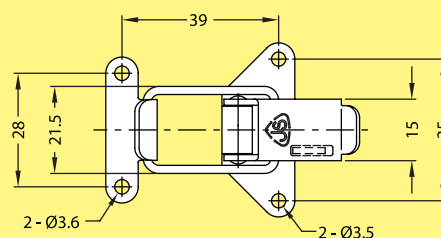

unit : mm

Model : TL112



*Also available in Stainless Steel

Model : TL112SS



Safe Load : 200kg MAX

Weight : 171g

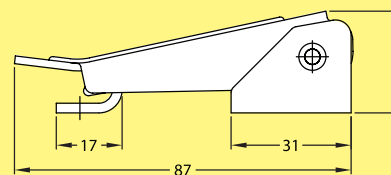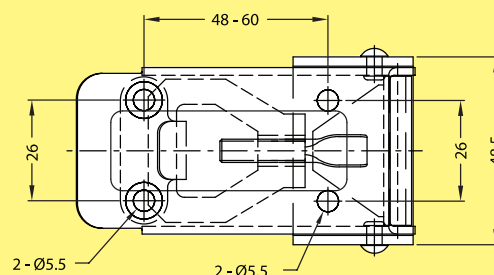

unit : mm

Model : TL123


*Also available in Stainless Steel

Model : TL123SS



Safe Load : 100kg MAX

Weight : 55g

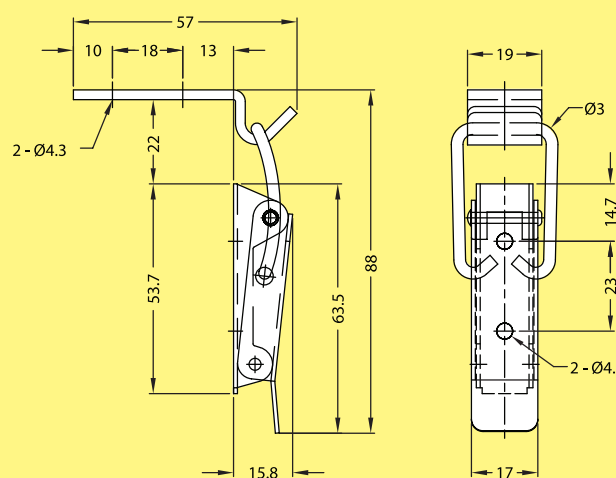

unit : mm

TOGGLE LINK CLAMP


• LATCH •



JSCLAMP
HIGH QUALITY TOGGLE CLAMP


Model : TL307

*Also available in Stainless Steel
Model : TL307SS

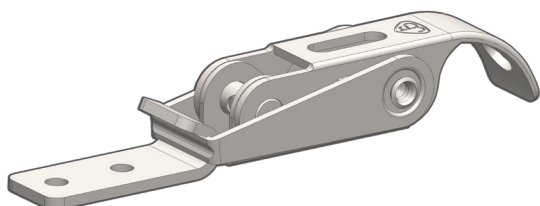

Safe Load : 40kg MAX

Weight : 61g

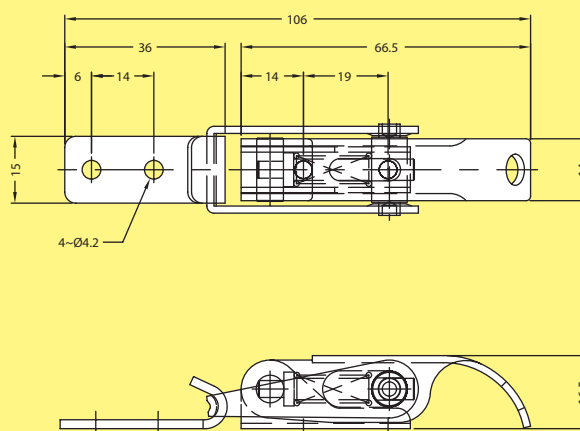

unit : mm


Model : TL204

*Also available in Stainless Steel
Model : TL204SS



Safe Load : 60kg MAX

Weight : 38g

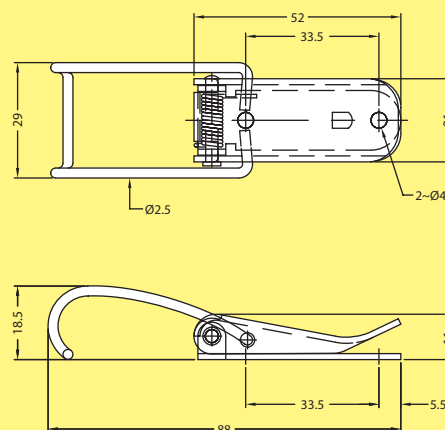

unit : mm

Model : TL304

*Also available in Stainless Steel
Model : TL304SS




Model : TL304K

*Also available in Stainless Steel
Model : TL304KSS



Safe Load : 50kg MAX

Weight : 45g

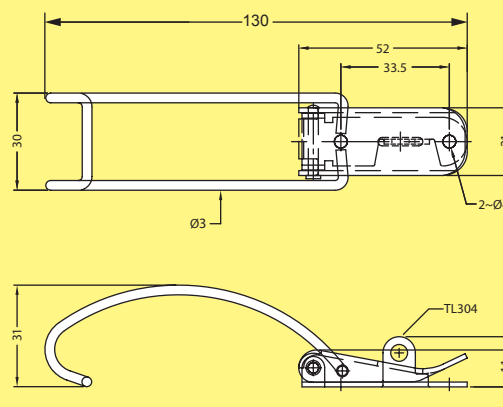

unit : mm





**TOGGLE
LINK CLAMP**
• LATCH •

Model : TL126

*Also available in Stainless Steel

Model : TL126SS

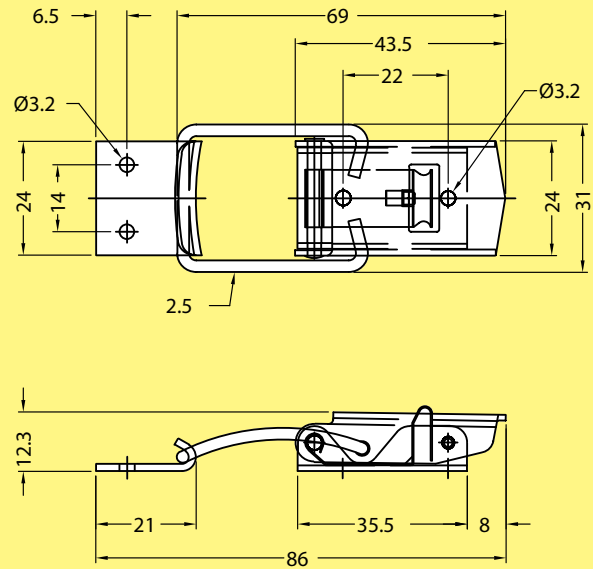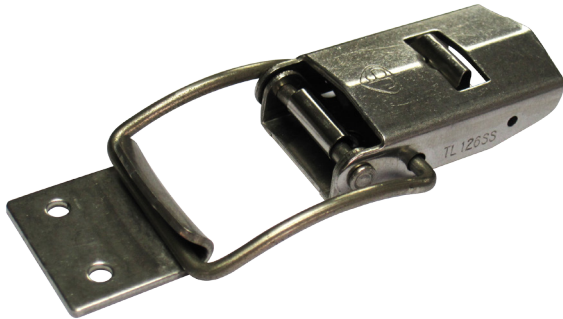

unit : mm

Safe Load : 60kg MAX

Weight : 37g





UNIVERSAL RACK CLAMP & C-CLAMP



JSCLAMP
HIGH QUALITY TOGGLE CLAMP



Model : URC 6020

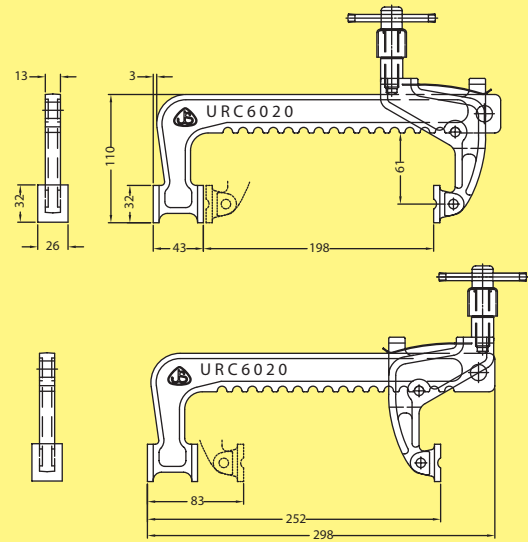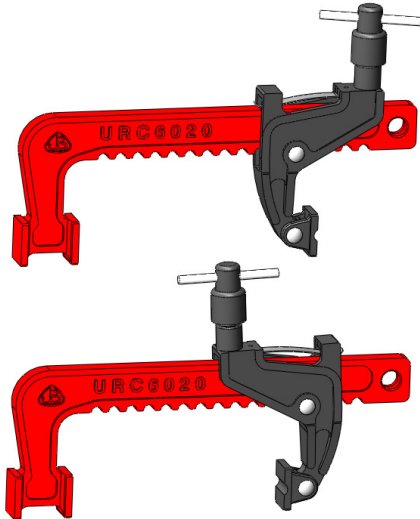

unit : mm

Holding Capacity : 400kg MAX
Weight : 1530g

Model : URC 6030

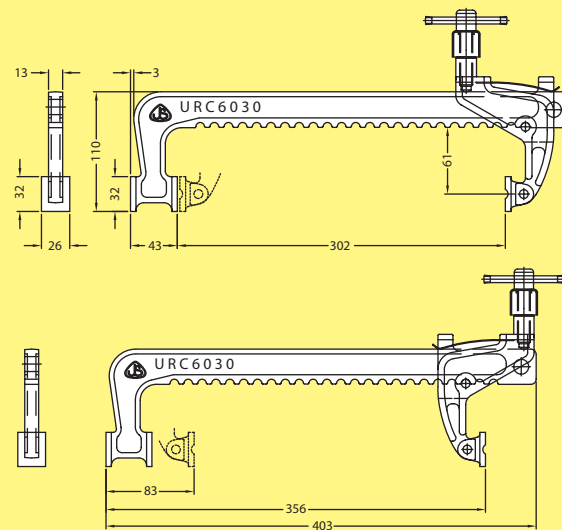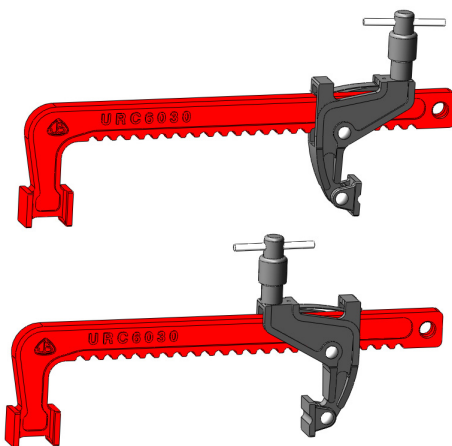

unit : mm

Holding Capacity : 400kg MAX
Weight : 1765g






JSCLAMP
HIGH QUALITY TOGGLE CLAMP



**UNIVERSAL
RACK CLAMP
& C-CLAMP**

C - CLAMP

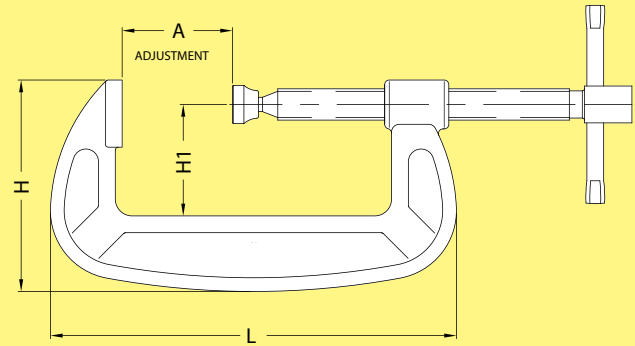

unit : mm

Model No.	H	H1	L	A	HOLDING CAPACITY	WEIGHT
C100	105	54	192	0.0~100	3000kg	1.4kg
C150	137	74	264	0.0~150	3600kg	3.1kg
C200	177	98	325	0.0~200	6000kg	4.5kg



HEAVY DUTY CABINET



JSCLAMP
HIGH QUALITY TOGGLE CLAMP


Model	Section	Column	Row	Drawer Unit	Dimension (mm)			Nett Weight (kg)	Holding Capacity (kg)
					W	D	H		
1. A3-2440	2	4	10	40	477	215	650	14.5	240
2. A3-2440R	2	4	10	40	477	215	650	14.5	240
3. A3-3460	3	4	15	60	477	215	950	21	360
4. A3-3460R	3	4	15	60	477	215	950	21	360

Ordering model
(example):


A3 - 2440R

A3 Drawer Column Oil Resistant
Section Drawer Unit


A3 Drawer
(Transparent)



A3 Drawer*
(Oil Resistant)



—A3—
A3-2440•A3-2440R*

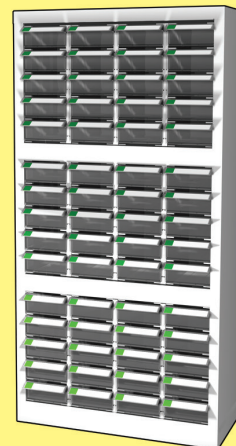

—A3—
A3-3460•A3-3460R*

*Oil Resistant

JS SMALL PARTS CABINETS provide convenient storage and orderly organized for all sort of small parts, Crystal-clear polystyrene drawers to permit quick visual inspection and picking of contents. Each smooth slide-gliding drawer have pull handle, two cross dividers to permit user to create any sizes required and label holder for marking purposes. Label cards and transparent protected covers are included. Drawer stoppers prevent accidental removal and spilling of contents. Cabinets are welded steel frame finished in rust-resistant epoxy powder coating of attractive mistgray. Cabinets can be arranged in row or stacked up on top of each other. For replacement of drawers, drawer track / support specify model No.

Model	Column	Row	Drawer Unit	Dimension (mm)			Nett Weight (kg)	Holding Capacity (kg)
				W	D	H		
1. F4-318T	3	6	18	477	235	401	9	216
2. F4-318R	3	6	18	477	235	401	9	216
3. F4-345T	3	15	45	477	235	950	23	540
4. F4-345R	3	15	45	477	235	950	23	540
5. F6-312T	3	4	12	477	235	401	9	216
6. F6-312R	3	4	12	477	235	401	9	216
7. F6-330T	3	10	30	477	235	950	23	540
8. F6-330R	3	10	30	477	235	950	23	540
9. G4-318T	3	6	18	558	315	403	14	216
10. G4-345T	3	15	45	558	315	950	30	540
11. G6-312T	3	4	12	558	315	403	14	216
12. G6-330T	3	10	30	558	315	950	30	540

Ordering model
(example):

F4 - 318T

F4 Drawer Column Transparent
Drawer Unit



F4 Drawer
(Transparent)



F4 Drawer*
(Oil Resistant)



F6 Drawer
(Transparent)



F6 Drawer*
(Oil Resistant)



G4 Drawer
(Transparent)




G6 Drawer
(Transparent)

F4 Drawer :
52(H) x 125(W) x 220(D)


F6 Drawer :
81(H) x 125(W) x 220(D)

G4 Drawer :
52(H) x 152(W) x 300(D)

G6 Drawer :
81(H) x 152(W) x 300(D)



—F4/F6/G4/G6—
F4-318T•F4-318R*
F6-312T•F6-312R*
G4-318T•G6-312T

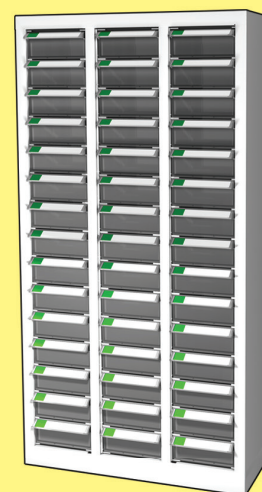

—F4/F6/G4/G6—
F4-345T•F4-345R*
F6-330T•F6-330R*
G4-345T•G6-330T

*Oil Resistant



HEAVY DUTY CABINET (WITH DOOR)



unit : mm

Model	Column	Row	Drawer Unit	Dimension (mm)			Nett Weight (kg)	Holding Capacity (kg)
				W	D	H		
F4-460T-D	4	15	60	694	285	962	41	720
F6-440T-D	4	10	40	694	285	962	39	720
G4-460T-D	4	15	60	802	363	962	51	720
G6-440T-D	4	10	40	802	363	962	47	720

Ordering model
(example):

F4 - 460T - D
F4 Drawer | Column | Transparent | Door
Drawer Unit



F6 Drawer
(Transparent)



F6 Drawer*
(Oil Resistant)



F4 Drawer
(Transparent)



F4 Drawer*
(Oil Resistant)

F4 Drawer :
52(H) x 125(W) x 220(D)
F6 Drawer :
81(H) x 125(W) x 220(D)
G4 Drawer :
52(H) x 152(W) x 300(D)
G6 Drawer :
81(H) x 152(W) x 300(D)



G4 Drawer
(Transparent)



G6 Drawer
(Transparent)

REVOLVING PLATE

JSCLAMP
HIGH QUALITY TOGGLE CLAMP


Model : RP160MDSH

***Medium Duty**



This **Revolving Plate** is confirmed to the testing standard of functioning up to **15,000** rotation with **120kg** center load.

Weight : 1300g

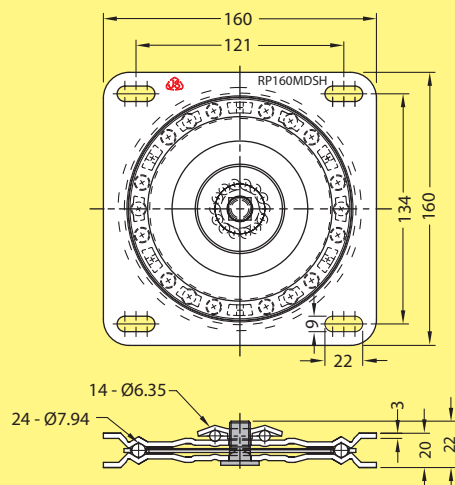

unit : mm


Model : RP16023

***Medium Duty**



This **Revolving Plate** is confirmed to the testing standard of functioning up to **15,000** rotation with **120kg** center load.

Weight : 1095g

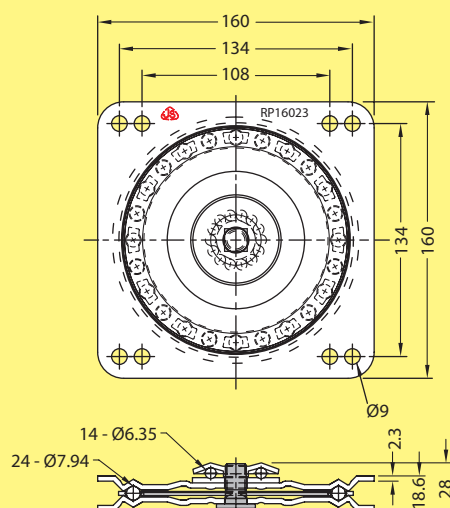

unit : mm


Model : RP160MD

***Medium Duty**



This **Revolving Plate** is confirmed to the testing standard of functioning up to **15,000** rotation with **120kg** center load.

Weight : 1370g

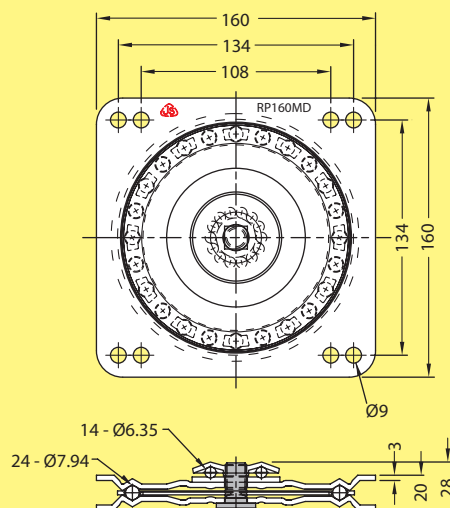


unit : mm





REVOLVING PLATE

Model : RP25023F


This **Revolving Plate** is confirmed to the testing standard of functioning up to **15,000** rotation with **210kg** center load.

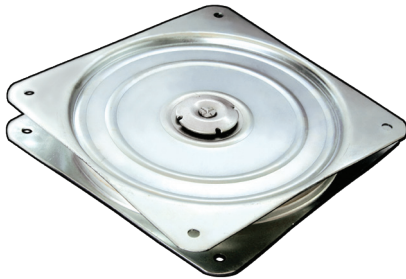


Weight : 2434g

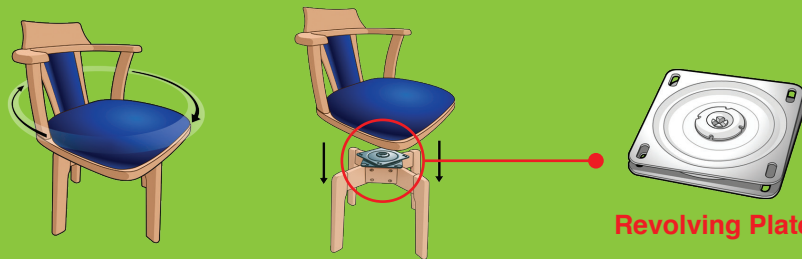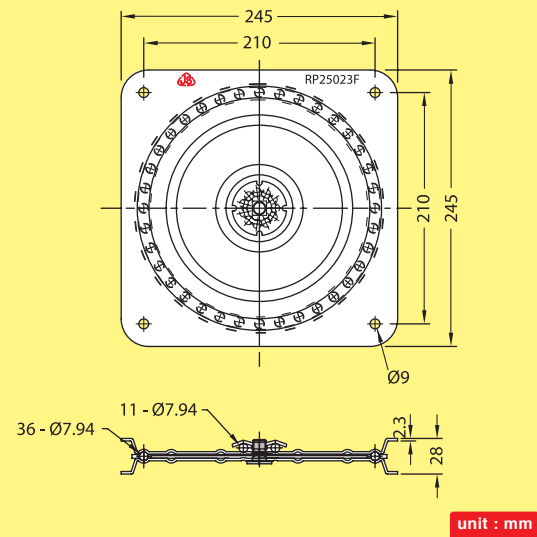

Kung Fu Exercise Twister

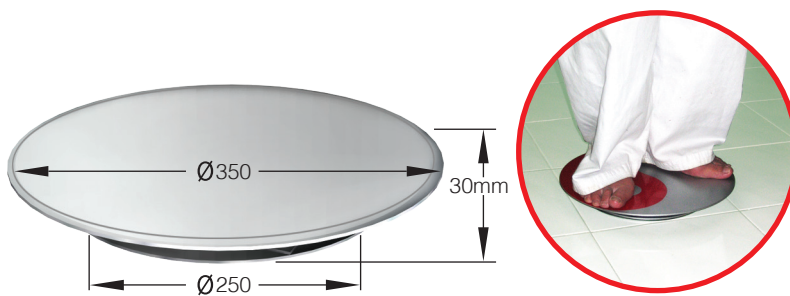


RACK FOOTING

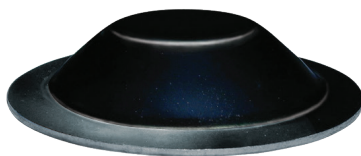

Model	A	B	C	H	T	Weight
1. RF25T150RD	150	126	65	29	2.5	249g
2. RF30T150RD	150	126	65	29	3.0	448g
3. RF40T170RD	167	135	76	39	4.0	831g
4. RF30T190RD	190	135	110	27	3.0	780g

Mat'l : M.S


Coating : NIL

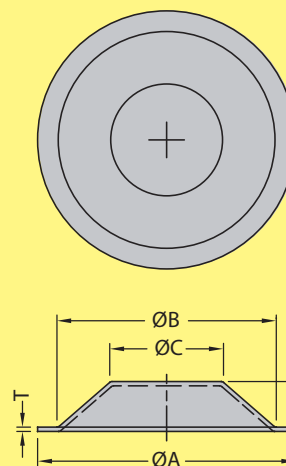

unit : mm




SQB-TYPE

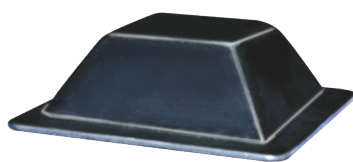

SQA-TYPE




SQB-TYPE

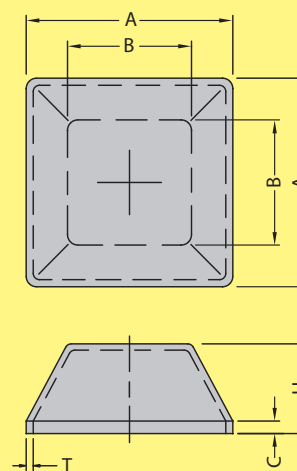

unit : mm

SQA-TYPE

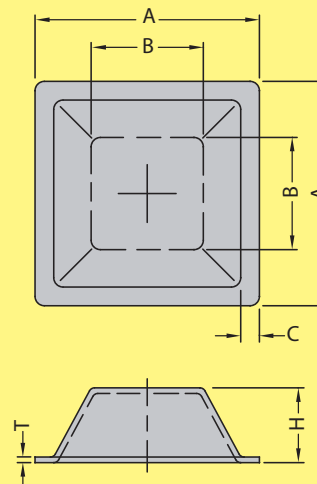

unit : mm

Model	A	B	C	H	T	Weight
1. RF30120SQA40	120	60	10	40	3.0	437g
2. RF40120SQA40	120	60	10	40	4.0	584g
3. RF40120SQB50	120	55	30	50	4.0	743g
4. RF40125SQA50	125	72	10	50	4.0	731g
5. RF45130SQA45	130	87	10	45	4.5	854g
6. RF40100SQB50	100	72	10	50	4.0	587g
7. RF40114SQA48	114	72	4	48	4.0	587g
8. RF30100SQA35	100	41	10	35	3.0	320g
9. RF30085SQB35	85	41	3	35	3.0	253g

Mat'l : M.S

Coating : NIL



MACHINE MOUNT & LEVEL ADJUSTER

Machine Mount

JS High Performance Rubber


- Tensile strength 25 MPa
- Elongation at break max 900%
- Max temperature dry atmosphere 120°C
- Cold resistance -40°C
- Resistance to permanent set
- Abrasion resistance
- Tear resistance
- Rebound
- Resistance to oil and gasoline
- Resistance to hydrolysis, dilute alkali
- Resistance to gas permeability



Model	ØA	Adjustable Height (mm)	Bolt Thread Length (mm)	H1	H2	Capacity	Weight
1. MM-100-70	100	38 - 56	M12 x 120	31	44	700kg	0.85kg
2. MM-140-70	140	45 - 65	M18 x 120	38	48	1000kg	2.00kg
3. MM-190-70	190	55 - 77	M24 x 180	41	60	2000kg	4.60kg
4. MM-250-70	250	74 - 109	M30 x 150	63	77	3500kg	10.5kg

Machine Mount

- (1) Screw Bolt
- (2) Locking Nut
- (3) Washer
- (4) Machine
- (5) Nitrile Rubber Pad
- (6) Support Housing
- (7) Bearing Plate

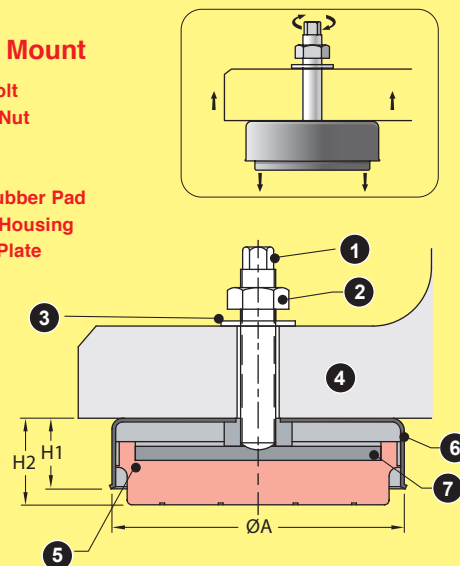

unit : mm

Model : LA-1 (M8 x 33L) LA-1 (M10 x 33L)


*Also available in Stainless Steel



Static Load : 90kg MAX

Weight : 27g/38.5g

Level Adjuster

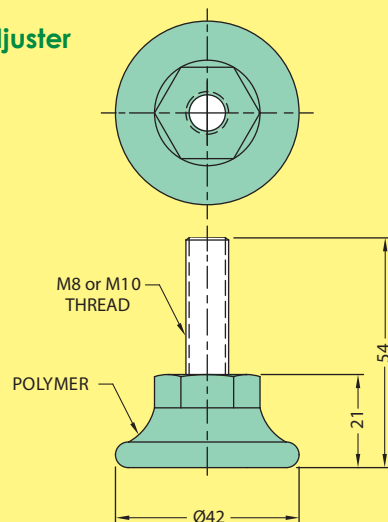

unit : mm


*Also available in Stainless Steel

**SPECIAL SIZES ORDER
ARE WELCOME**



Model	MO	ØDO	L1	L2	L3	Weight	Static Load (kg)
1. LA-3	M8 or M10	Ø40	13	50	70	80g	350kg
2. LA-3	M12	Ø40	13	70	90	107g	350kg
3. LA-4	M16	Ø60	18	70	100	320g	500kg
4. LAR-4	M16	Ø60	18	70	105	320g	500kg
5. LA-5	M20	Ø80	26	83	126	551g	700kg
6. LAR-5	M16 or M20	Ø80	26	83	126	551g	700kg

Level Adjuster

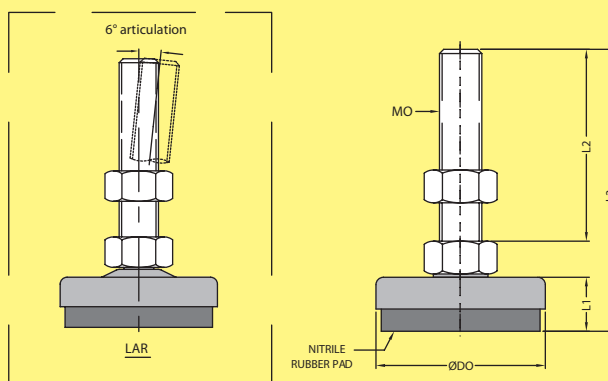

unit : mm

LEVELING MOUNT & LEVELING FEET



JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model	MO	ØDO	L1	L2	Weight	Static Load (kg)			
1. LM-45B3860	3/8 BSW	Ø45	14	60	77g	350			
2. LM-45M860	M8			60	65g				
3. LM-45M1060	M10			60	87g				
4. LM-45M1260	M12			60	110g				
5. LM-60M880	M8	Ø60	16	80	89g	700			
6. LM-60M8100				100	95g				
7. LM-60M8120				120	111g				
8. LM-60M1080	M10			80	114g				
9. LM-60M10100	M10			100	125g				
10. LM-60M10120	M10			120	144g				
11. LM-60M1280	M12			M12			80	140g	
12. LM-60M12100				M12			100	157g	
13. LM-60M12120				M12			120	179g	
14. LM-75B1275*	1/2 BSW	Ø75	20	75	184g	1000			
15. LM-75B12100*				100	202g				
16. LM-75B12150*				150	241g				
17. LM-75B5875*				75	258g				
18. LM-75B58100*	5/8 BSW			M12			100	288g	
19. LM-75B58150*				M12			150	347g	
20. LM-75M1275*	M12			M12			75	167g	
21. LM-75M12100*				M12			100	185g	
22. LM-75M12150*				M12			150	223g	
23. LM-75M1675*	M16	Ø100	25	75	238g	1500			
24. LM-75M16100*				M16			100	269g	
25. LM-75M16150*				M16			150	337g	
26. LM-100B5875	5/8 BSW			M16			75	335g	
27. LM-100B58100				M16			100	360g	
28. LM-100B58150				M16			150	426g	
29. LM-100M1675	M16			M16			75	316g	
30. LM-100M16100				M16			100	348g	
31. LM-100M16150				M16			150	414g	


Also available in Stainless Steel
*LML (Long Base) Available

Static load has been tested
and verified by lab.

Mat'l : M.S

Coating : BZ

Leveling Mount

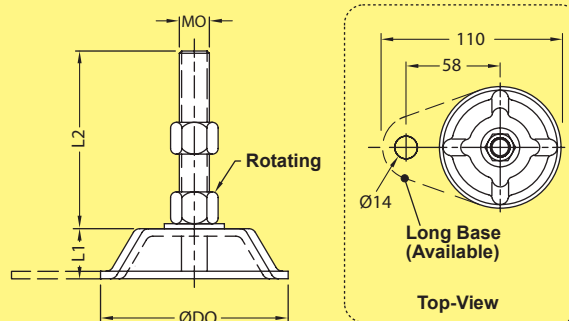

Ordering model
(example):

LML - 75M16150

Long Base ØDO Mo L2




LML
(Long base)

LM

unit : mm


Rubber Pad

Model : RBP - 75 - LML

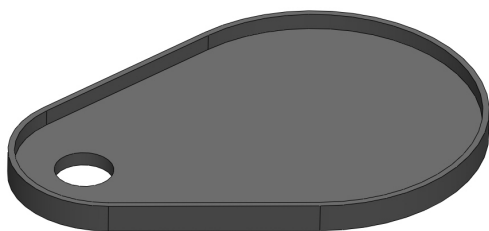

**NEW
PRODUCT**


Weight : 42g

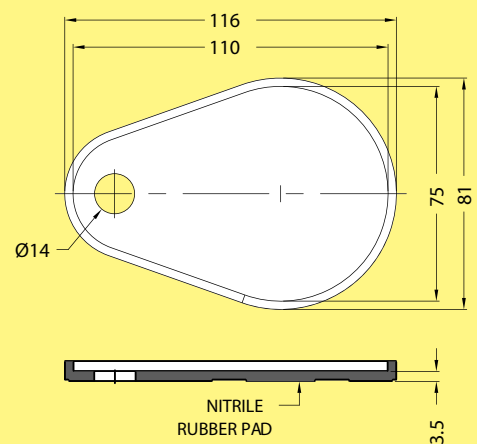

unit : mm

Model	ØD	ØE	T	C	ØP	Weight
1. RBP-45	Ø45	Ø51	3.5	-	-	13g
2. RBP-60	Ø60	Ø66	3.5	-	-	20g
3. RBP-75	Ø75	Ø81	3.5	-	-	33g
4. RBP-80	Ø80	Ø86	4.5	65	Ø8.5	48g
5. RBP-100	Ø100	Ø107	5.0	79	Ø10.5	84g




Rubber Pad

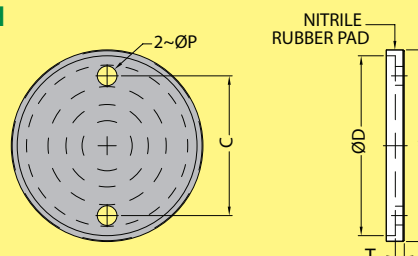



LEVELING MOUNT & LEVELING FEET

Leveling Feet

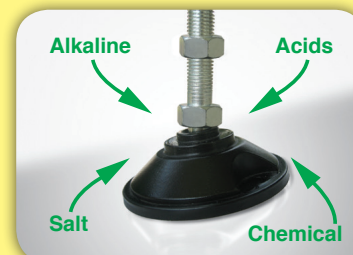

unit : mm


Model	MO	ØD	C	ØP	H	L	L1	Weight (g)	Static Load (kg)
1. LF-60M1045	M10	Ø66	-	-	29	45	89	102	700
2. LF-60M1070						70	114	114	
3. LF-60M10100						100	144	129	
4. LF-60M1245	M12	Ø66	-	-	29	45	89	124	700
5. LF-60M1270						70	114	143	
6. LF-60M12100						100	144	164	
7. LF-80M1660	M16	Ø86	63	Ø8.5	30	60	108	259	1000
8. LF-80M16100						100	148	316	
9. LF-80M16140						140	188	367	
10. LF-80M16160	M16	Ø86	63	Ø8.5	30	160	208	392	1000
11. LF-100M1660						60	115	330	
12. LF-100M16100						100	155	375	
13. LF-100M16140	M16	Ø107	78	Ø10.4	38	140	195	427	1200
14. LF-100M16160						160	215	464	
15. LF-100M20100						100	155	525	
16. LF-100M20140	M20	Ø107	78	Ø10.4	38	140	195	610	1200
17. LF-100M20160						160	215	658	
18. LF-100M20200						200	255	740	

Also available in Stainless Steel

JS Leveling Feet can be used to level electronic racks, machine tools, benches, etc. The polyamide offer good impact resistance, high strength & good resistance to many organic acids, alkaline, chemical, salt, etc.




MITRE UNIVERSAL CLAMP



JSCLAMP
HIGH QUALITY TOGGLE CLAMP



Model : MUC2910



Weight : 881g

unit : mm



Model : MUC1910



Weight : 756g

unit : mm


Model : MUC2920



Weight : 420g

unit : mm

Model : MUC2915




Weight : 282g




unit : mm



Usage

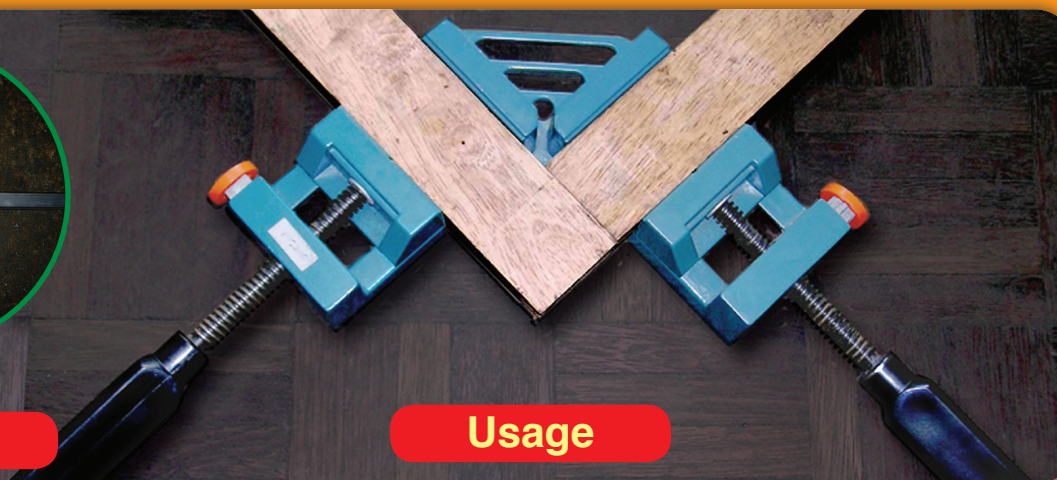

Usage

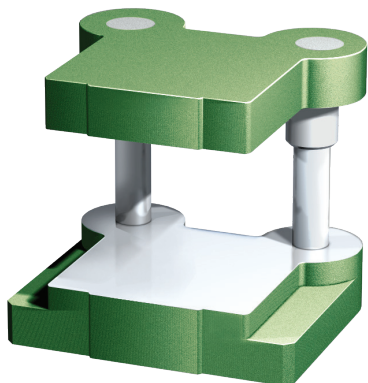

unit : mm

Size	A	B	H1	H2	d	D	L1	L2	C	B1	R	G
1. 80 x 80	80	80	25	35	22	32	130	57	70	100	26	122
2. 80 x 100	80	100	25	35	22	32	130	57	70	120	26	122
3. 100 x 80	100	80	25	35	22	32	130	57	90	100	26	122
4. 100 x 100	100	100	35	40	22	32	140	62	90	120	26	142
5. 100 x 125	100	125	30	40	22	38	140	62	90	148	32	154
6. 100 x 150	100	150	30	40	22	38	140	62	90	173	32	154
7. 125 x 80	125	80	30	40	22	32	140	62	115	100	32	179
8. 125 x 100	125	100	35	40	22	38	140	62	115	123	32	179
9. 125 x 125	125	125	35	40	22	38	140	62	115	148	32	179
10. 150 x 100	150	100	35	40	22	38	140	62	140	123	32	204
11. 150 x 125	150	125	35	40	22	38	140	62	140	148	32	204
12. 150 x 150	150	150	35	40	22	38	150	62	140	173	32	204
13. 150 x 180	150	180	35	40	25	38	150	62	140	208	32	204
14. 180 x 125	180	125	35	45	28	40	160	67	170	153	38	246
15. 180 x 150	180	150	35	45	28	40	160	67	170	178	38	246
16. 180 x 180	180	180	35	45	28	40	160	67	170	208	38	246
17. 210 x 100	210	100	35	45	25	38	150	62	200	123	32	264
18. 210 x 125	210	125	35	45	28	40	160	67	200	153	38	276
19. 210 x 150	210	150	35	45	28	40	160	67	200	178	38	276
20. 210 x 180	210	180	35	45	28	40	160	67	200	208	38	276
21. 210 x 210	210	210	35	45	28	40	160	67	200	238	38	276
22. 250 x 125	250	125	40	50	32	44	160	67	240	153	38	316
23. 250 x 150	250	150	40	50	32	44	160	67	240	178	38	316
24. 250 x 180	250	180	40	50	32	44	160	67	240	208	38	316
25. 250 x 210	250	210	40	50	32	44	160	67	240	238	38	316
26. 250 x 250	250	250	45	55	32	44	180	77	200	278	38	366
27. 300 x 125	300	125	40	55	32	44	180	77	290	153	38	366
28. 300 x 150	300	150	40	55	32	44	180	77	290	178	38	366
29. 300 x 180	300	180	40	55	32	44	180	77	290	208	38	366
30. 300 x 210	300	210	40	55	32	44	180	77	290	238	38	366
31. 300 x 250	300	250	40	55	32	44	180	77	290	278	38	366
32. 300 x 300	300	300	40	55	32	44	180	77	290	328	38	366
33. 350 x 150	350	150	45	55	32	44	180	77	340	178	38	416
34. 350 x 210	350	210	45	55	32	44	180	77	340	238	38	416
35. 350 x 250	350	250	45	55	32	44	180	77	340	278	38	416

ANTI-VIBRATION MOUNT

JS High Performance Rubber

- Tensile strength 25 MPa
- Elongation at break max 900%
- Max temperature dry atmosphere 120°C
- Cold resistance -40°C
- Resistance to permanent set
- Abrasion resistance
- Tear resistance
- Rebound
- Resistance to oil and gasoline
- Resistance to hydrolysis, dilute alkali
- Resistance to gas permeability



Ordering model
(example):



HHS D x H
Type Diameter Height

The mount can be used effectively whenever anti-vibration are needed. They are suitable for use in both compression and shear application.


Application include mountings on engine, generator, compressor, air conditioner, motor, blower, electrical controller, laboratory equipment and other business industry machinery. The rubber is excellent to rebound, excellent resistance to abrasion, tear, permanent set hydrolysis and dilute alkali.

Model	D	D1	H	L	d	Load (kg)	Weight (kg)
1. HHS 30-25	30	—	25	—	M8 x 1.25	40	0.04
2. HHS 40-28	40	—	28	—	M10 x 1.5	60	0.08
3. HHC 30-25	30	22	25	—	M8 x 1.25	40	0.04
4. HHC 40-28	40	26	28	—	M10 x 1.5	60	0.08
5. HHC 60-36	60	36.5	36	—	M10 x 1.5	90	0.21
6. HHC 60-43	60	36.5	43	—	M10 x 1.5	70	0.23
7. HHC 60-60	60	52	60	—	M10 x 1.5	150	0.36
8. HHC 70-56	70	50	56	—	M12 x 1.75	220	0.56
9. HHC 80-65	80	70	65	—	M12 x 1.75	500	0.87
10. HHC 90-50	90	80	50	—	M12 x 1.75	500	0.96
11. HHC 90-77	90	80	77	—	M12 x 1.75	800	1.17
12. HHC 108-85	108	95	85	—	M16 x 2.0	800	1.71
13. HHC 130-96	130	117	96	—	M16 x 2.0	1400	2.88
14. TTS 20-20	20	—	20	18	M6 x 1.0	12	0.03
15. TTS 30-25	30	—	25	20	M8 x 1.25	40	0.06
16. TTS 40-28	40	—	28	25	M10 x 1.5	60	0.12
17. TTC 20-20	20	14	20	18	M6 x 1.0	12	0.03
18. TTC 30-25	30	22	25	20	M8 x 1.25	40	0.06
19. TTC 40-28	40	26	28	25	M10 x 1.5	60	0.10
20. TTC 60-36	60	36.5	36	30	M10 x 1.5	90	0.22
21. TTC 60-43	60	36.5	43	30	M10 x 1.5	70	0.23
22. TTC 60-60	60	52	60	30	M10 x 1.5	150	0.34
23. TTC 70-56	70	50	56	35	M12 x 1.75	220	0.52
24. TTC 80-65	80	70	65	35	M12 x 1.75	500	0.85
25. TTC 90-50	90	80	50	45	M16 x 2.0	500	1.06
26. TTC 90-77	90	80	77	45	M16 x 2.0	800	1.25
27. TTC 108-85	108	95	85	45	M16 x 2.0	800	1.90
28. TTC 130-96	130	117	96	45	M16 x 2.0	1400	2.90
29. THC 130-96	130	117	96	45	M16 x 2.0	1400	2.56
30. THS 20-23-NB	20	—	23	12	M6 x 1.0	12	0.02



HHS




HHC





TTS






TTC



THS



THC



unit : mm

JS Standard SKD Straight Round Punch

Size		Length (L)							
ØD	ØH	40	50	60	70	80	90	100	120
1. 1.0	1.6	0	0	0					
2. 1.5	2	0	0	0					
3. 2.0	4	0	0	0	0	0			
4. 2.5	4.5	0	0	0	0	0			
5. 3.0	5	0	0	0	0	0	0	0	
6. 3.5	5.5	0	0	0	0	0			
7. 4.0	7	0	0	0	0	0	0	0	
8. 4.5	7.5	0	0	0	0	0			
9. 5.0	8	0	0	0	0	0	0	0	
10. 5.5	8.5	0	0	0	0	0	0	0	
11. 6.0	9	0	0	0	0	0	0	0	
12. 6.5	9.5	0	0	0	0	0	0	0	
13. 7.0	10	0	0	0	0	0	0	0	
14. 8.0	11	0	0	0	0	0	0	0	0
15. 9.0	12	0	0	0	0	0	0	0	
16. 10	13	0	0	0	0	0	0	0	0
17. 11	14		0	0	0	0	0	0	
18. 12	15		0	0	0	0	0	0	
19. 13	16		0	0	0	0	0	0	
20. 14	17		0	0	0	0	0	0	
21. 15	18		0	0	0	0	0	0	
22. 16	19		0	0	0	0	0	0	0
23. 18	21		0	0	0	0	0	0	
24. 20	23		0	0	0	0	0	0	
25. 25	28		0	0	0	0	0	0	

Ordering model (example): **SKD - Ø20x70L - 7PCS**

Material ØD Length QTY

Material : SKD - 11 (XW-5)


Hardness : HRC 60° - 63°

0 : Ready Stock

*Special size orders are welcome



SKD

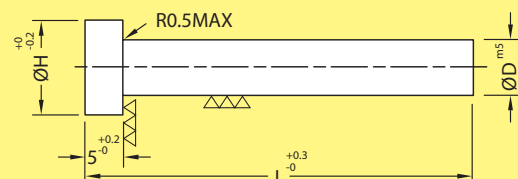

unit : mm

JS Standard High Speed Straight Round Punch

Size		Length (L)						
ØD	ØH	40	50	60	70	80	90	100
1. 1.0	1.6	0	0	0				
2. 1.5	2	0	0	0				
3. 2.0	4	0	0	0	0	0		
4. 2.5	4.5	0	0	0	0	0		
5. 3.0	5	0	0	0	0	0	0	0
6. 3.5	5.5	0	0	0	0	0		
7. 4.0	7	0	0	0	0	0	0	0
8. 4.5	7.5	0	0	0	0	0		
9. 5.0	8	0	0	0	0	0	0	0
10. 5.5	8.5	0	0	0	0	0	0	0
11. 6.0	9	0	0	0	0	0	0	0
12. 6.5	9.5	0	0	0	0	0	0	0
13. 7.0	10	0	0	0	0	0	0	0
14. 8.0	11	0	0	0	0	0	0	0
15. 9.0	12	0	0	0	0	0	0	0
16. 10	13	0	0	0	0	0	0	0
17. 11	14		0	0	0	0	0	0
18. 12	15		0	0	0	0	0	0
19. 13	16		0	0	0	0	0	0
20. 14	17		0	0	0	0	0	0
21. 15	18		0	0	0	0	0	0
22. 16	19		0	0	0	0	0	0
23. 18	21		0	0	0	0	0	0
24. 20	23		0	0	0	0	0	0
25. 25	28		0	0	0	0	0	0

Ordering model (example): **SKH - Ø20x70L - 7PCS**

Material ØD Length QTY

Material : SKH - 51


Hardness : HRC 61° - 64°

0 : Ready Stock

*Special size orders are welcome



SKH

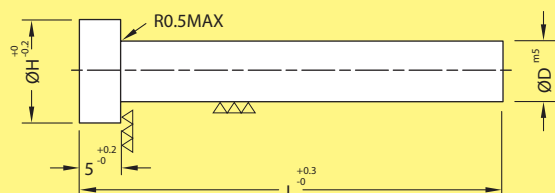

unit : mm

STAMPING SAFETY TOOL & DEAD BLOW HAMMER



JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Model : SST-15RT

Holding Capacity : 1.5kg | Weight : 85g



STAMPING SAFETY TOOL

unit : mm

Model : SST-30RT


Holding Capacity : 3kg | Weight : 102g





STAMPING SAFETY TOOL

unit : mm

Stamping Safety Tool




Model	Ø D	H	L	HOLDING CAPACITY	WEIGHT
SST - 1	19	19	230	1Kg	134g
SST - 2	19	19	230	2Kg	126g
SST - 3	22	19	228	3Kg	140g
SST - 4	28	26	235	4Kg	208g



unit : mm

Model : JSH-3



Weight : 923g




Dead Blow Hammer

unit : mm




Model : MV25T

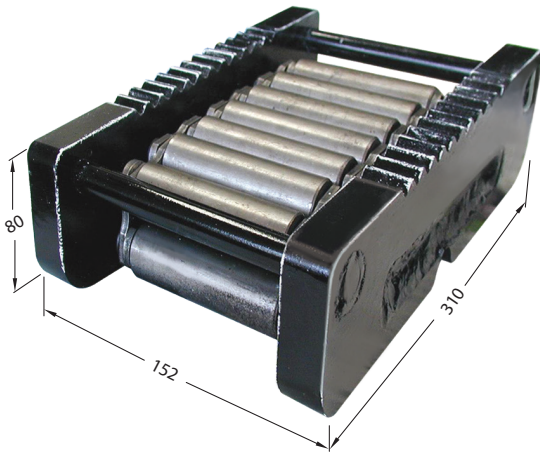

*Rental Available

Machine Mover

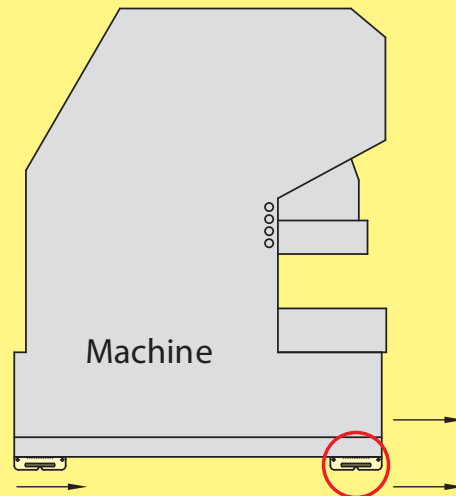

unit : mm


Load Capacity : 25 ton each

Weight : 18.4kg each

Unipunch



Model	A	B	C	D	E	W	L	PUNCH CAPACITY	MAT'L THICK.	BODY WEIGHT
A-1-150	23	57	76	28	20	48	253	Ø2.5-Ø11.9	6.0 max	7 kg
A-2-150	30	61	74	38	27	54	265	Ø12.0-Ø21.5	6.0 max	9 kg
A-3-150	40	67	69	50	34	68	280	Ø22.0-Ø25.0 Ø26.0-Ø30.0	6.0 max 4.5 max	12 kg
A-4-150	50	75	61	63	45	89	290	Ø31.0-Ø40.0	3.2 max	16 kg
A-5-150	55	71	58	78	50	98	305	Ø41.0-Ø50.0	3.2 max	20 kg

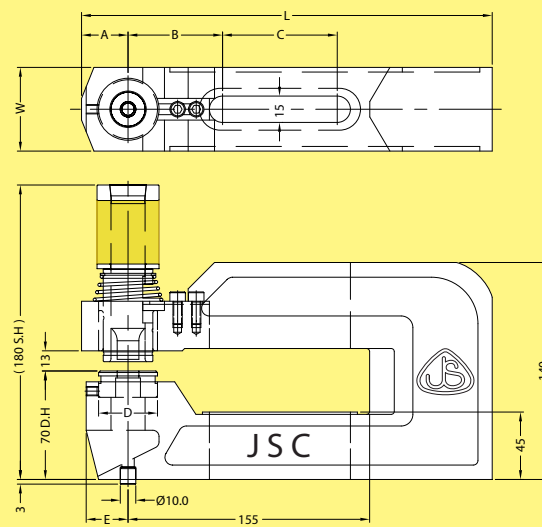

unit : mm

PNEUMATIC ROTARY INDEX TABLE





JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Pneumatic Rotary Index Table



Usage

Model	JS-RIT-280-90	JS-RIT-280-60	JS-RIT-280-45	JS-RIT-280-30	JS-RIT-280-15
ROTATE ANGEL	90°	60°	45°	30°	15°
ROTATE DIRECTION	Clock Wise	Clock Wise	Clock Wise	Clock Wise	Clock Wise
MAX. INDEXING LOAD (kg)	45kg	45kg	45kg	45kg	45kg
MAX. LINE PRESSURE (PSI)	20PSI	20PSI	20PSI	20PSI	20PSI
MAX. RECM'D LINE PRESSURE (PSI)	80PSI	80PSI	80PSI	80PSI	80PSI
WEIGHT (kg)	27kg	27kg	27kg	27kg	27kg

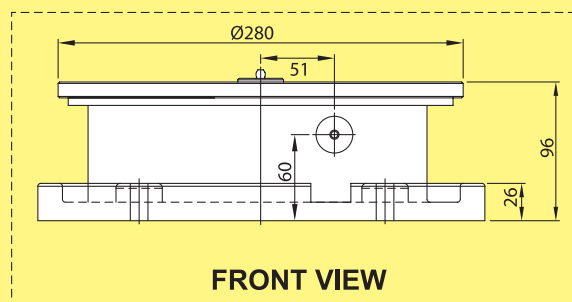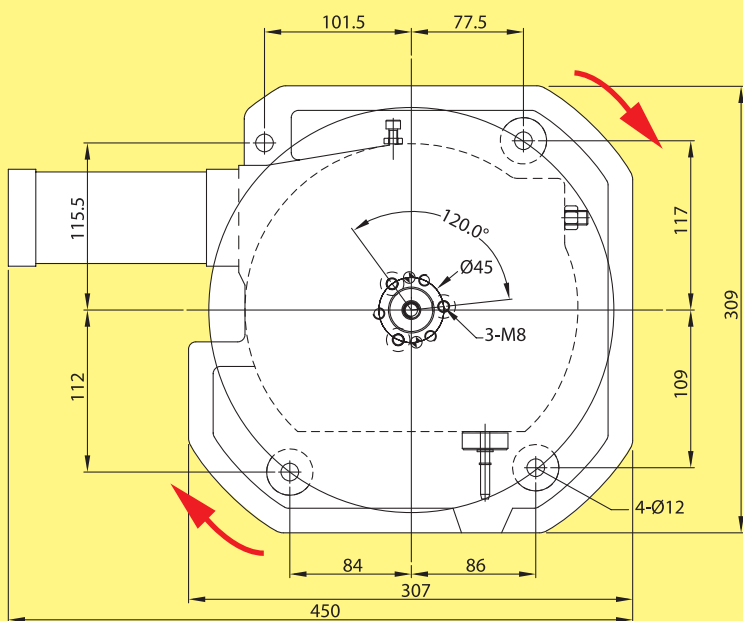

FRONT VIEW



unit : mm



Kungfu Stainless Steel Ring



Weight : 756g
Mat'l : SUS 304

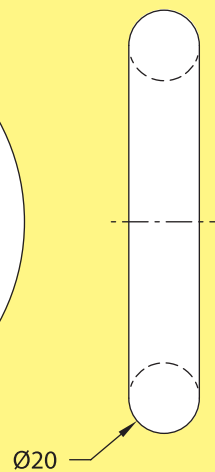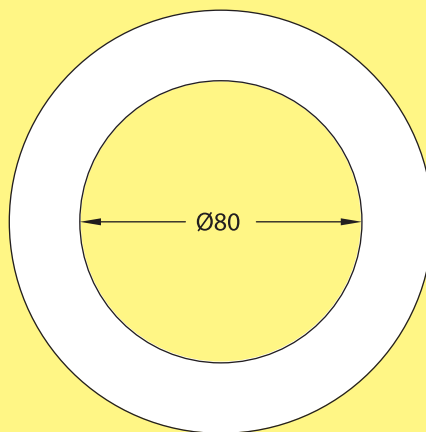

unit : mm

TROLLEY




CNC TOOLS TROLLEY

Overall Dimension (mm) : 410D x 615W x 860H
Tray Size (mm) : 365D x 570W x 75H

Model : CT - BT4015




Weight : 22.9kg

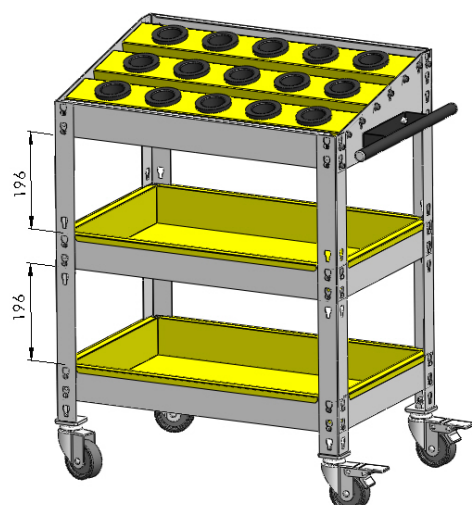

Model : CT - BT-4030




Weight : 24.7kg

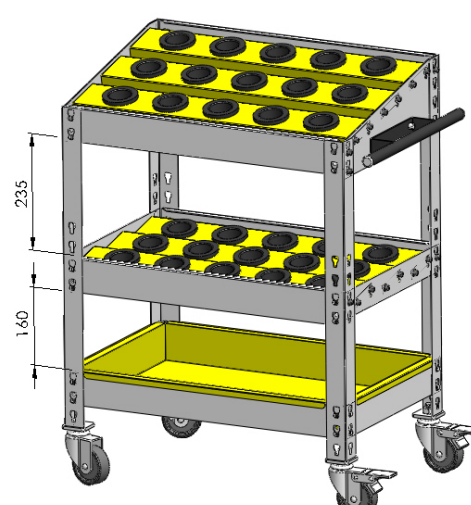

ADAPTOR (BT-40)

Mat'l : NBR

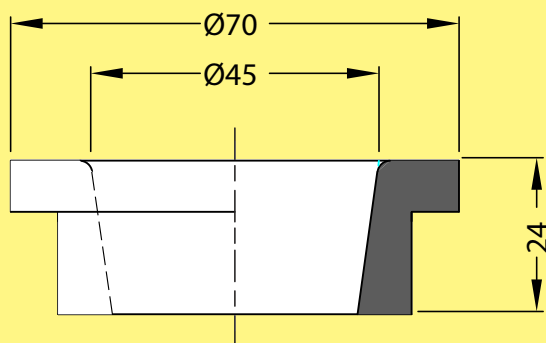


unit : mm

Holding Capacity - 70kg x 4 pcs castor wheel



Easy to Install :- Assembly Instruction

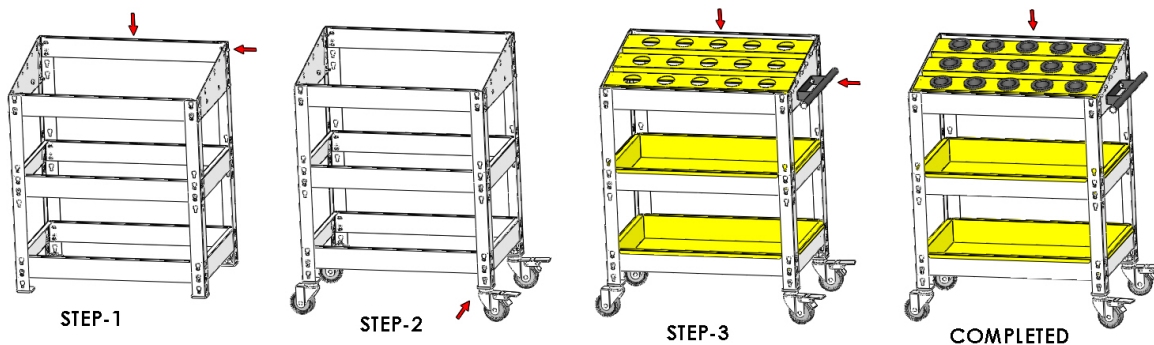



Heavy Duty 3 Level Universal Trolley

Overall Dimension (mm) : 410D x 615W x 860H

Tray Size (mm) : 365D x 570W x 75H

Gross Weight : 20.6kg

Model : UT3-1



Weight : 22.9kg


Holding Capacity - 210kg




Optional : Plywood




Heavy Duty




STEP 1




STEP 2



STEP 3



STEP 4





COMPLETED

HAND KNOB

Hand Knob

**EXTRA
SOLID**

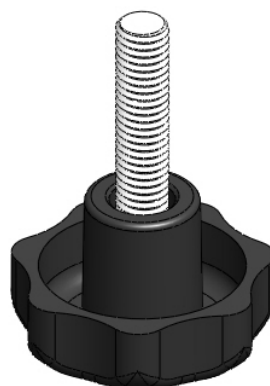


**NEW
PRODUCT**

MODEL	ØD	H	H1	M	L	Weight (g)
HKM-40M620	40	23	13	M6x1.0P	20	22g
HKM-40M630					30	24g
HKM-40M640					40	26g
HKM-40M650					50	28g
HKM-40M820				M8x1.25P	20	29g
HKM-40M830					30	32g
HKM-40M840					40	35g
HKM-40M850					50	38g
HKM-63M1020	63	40	20	M10x1.5P	20	73g
HKM-63M1030					30	78g
HKM-63M1040					40	83g
HKM-63M1050					50	88g
HKM-63M1060					60	92g
HKM-63M1220				M12x1.75P	20	88g
HKM-63M1230					30	95g
HKM-63M1240					40	101g
HKM-63M1250					50	108g
HKM-63M1260					60	116g


*Also available in stainless steel

MODEL	ØD	H	H1	M x Depth	Weight (g)
HKF-40M6SS	40	23	13	M6 x 15 Depth	27g
HKF-40M8SS				M8 x 15 Depth	24g
HKF-63M10SS	63	40	20	M10 x 24 Depth	75g
HKF-63M12SS				M12 x 24 Depth	68g

The polyamide offer good impact resistance, high strength & good resistance to many organic acids, alkaline, chemical, salt, etc.

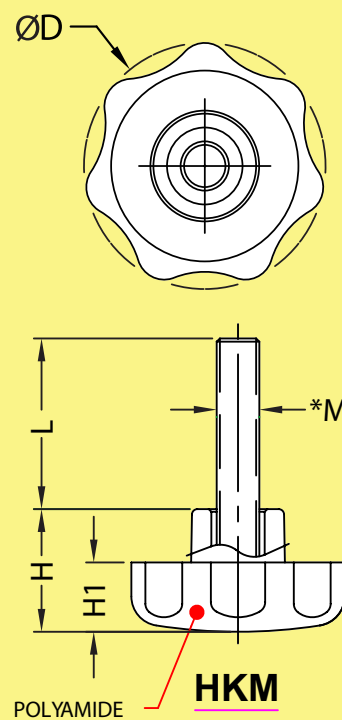

unit : mm

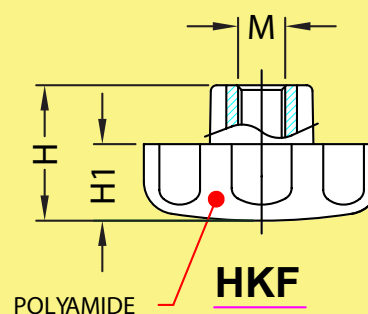

unit : mm